



Catalogue 2023

Pictograms



Eco
Saves at least 40 % water.



CLICK-IT® quick-assembly system
The lead-free counterweight for pull-out fittings can be easily clipped together by hand.



Sensor
Fitting with non-contact operation.



CLIP-IT® quick coupling
The connection hose is simply clipped by hand into the hose end piece of the shower hose.



PUSH & SWITCH
Simple changeover via push-button.



Extra-long connection hoses DO-IT®
No additional hose extensions necessary.



s-pointer
Angle of water flow can be adjusted to fit different shaped basins.



Shaft fastening FIX-IT®
Provides a safe and stable stand for the fittings and is very easy to install.



EcoPlus
The middle position of the handle allows cold water to flow. The hot water is turned on by moving the lever to the left.



Showering hygiene
Quick and easy to drain remaining water from the hand spray. No dripping.



HotStop
Fitting with anti-scald limiter.



Height adjustable and swiveling head shower
The shower rail is height-adjustable up to 30 cm, the shower arm can be swiveled sideways continuously.



Hand spray
Fitting with pull-out hand spray, can be switched over from normal flow to spray mode.



Scald protection
Thermostatic body independent of temperature.



Pull-out spout
Fitting with pull-out spout for extended working radius.



Battery operation
Electronic fitting with battery operation.



Bayonet connection
Allows the faucet to be pulled out and flipped to the side for installation near a window.



Mains operated
Electronic fitting for 230 V AC connection.



Multi-connector
Faucet with connection for washing machine or dishwasher to control water supply/shut-off.

Catalogue 2023

Content

	Technology navigator bathroom	6	List of article numbers	12
	The KLUDI kitchen concept	8	Spare parts	244
	Surfaces	10	General terms and conditions of sale	255
<hr/>				
BATHROOM	FITTINGS			
Smart Luxury	NOVA FONTE	22	BOZZ	53
	BALANCE	35	ZENTA SL	61
	AMEO	44		
Pure Function	PURE&STYLE	80	PURE&EASY	90
	PURE&SOLID	85		
	1926	97	ZENTA	114
	AMBA	105	OBJEKTA	119
	BINGO STAR	113	STANDARD	123
	FLEXX.BOXX & PRE-INSTALLATION SETS			
	FLEXX.BOXX	128	Pre-installation sets	130
	THERMOSTAT			
	Thermostat surface-mounted	140	Thermostat concealed	142
<hr/>				
SHOWERS	FITTINGS			
Shower Dreams	Shower Systems	148	Shower sets & wall rails	166
	Shower Duo	158	Head showers	182
	Hand showers	160	Shower hoses & accessories	194
	WASTES			
	Washbasin and bidet wastes	202	Bath- and shower wastes	207
<hr/>				
KITCHEN	FITTINGS			
Kitchen Competence	M-LINE		L-LINE	
	MIX	212	E-GO	228
	M2	215	L STEEL	229
	STEEL	216	L-INE	230
	MX	217	L-INE S	231
	ZENTA	219		
	OBJEKTA	220	C-LINE	
	SCOPE	222	E-GO	234
	LOGO NEO	223	BINGO STAR	235
	STANDARD	224	BINGO STAR XS	238
		BATHROOM		KITCHEN
ELECTRONIC FITTINGS	BALANCE E	35-38	E-GO	228, 234
	ZENTA SL E	63-66		
<hr/>				
HOSPITAL & CARE	PURE&EASY CARE	92		
	MEDI CARE	240		

Technology navigator bathroom

Quick and easy to desired product



Eco



Sensor



Showering hygiene



PUSH & SWITCH



s-pointer

	Eco	Sensor	Showering hygiene	PUSH & SWITCH	s-pointer
1926					
AMBA	•				•
AMEO	•			•	•
A-QA	•				
BALANCE	•	•		•	•
BINGO STAR	•				
BOZZ	•			•	•
COCKPIT					
FIZZ			•		
FRESHLINE			•		
LOGO			•		
MEDI CARE	•				
NOVA FONTE	•			•	•
OBJEKTA	•				•
PURE&EASY	•			•	•
PURE&SOLID	•			•	•
PURE&STYLE	•			•	•
ZENTA	•				•
ZENTA SL	•	•		•	•



Eco

Saves at least 40 % water.



Sensor

Fitting with non-contact operation.



Showering hygiene

Quick and easy to drain remaining water from the hand spray. No dripping.






PUSH & SWITCH

Simple changeover via push-button.



s-pointer

Angle of water flow can be adjusted to fit different shaped basins.

	 HotStop	 EcoPlus	 Scald protection	 Height adjustable and swiveling head shower	 Shaft fastening FIX-IT®
1926	•				
AMBA	•		•		
AMEO	•				•
A-QA	•			•	
BALANCE	•				
BINGO STAR					
BOZZ	•	•			•
COCKPIT	•		•	•	
FIZZ	•			•	
FRESHLINE	•			•	
LOGO	•			•	
MEDI CARE	•				
NOVA FONTE	•	•			•
OBJEKTA	•				
PURE&EASY		•			
PURE&SOLID		•			
PURE&STYLE		•			•
ZENTA	•	•			•
ZENTA SL	•	•			•



HotStop
Fitting with anti-scald limiter.



EcoPlus
The middle position of the handle allows cold water to flow.



Scald protection
Thermostatic body independent of temperature.




Height adjustable and swiveling head shower
The shower rail is height-adjustable up to 30 cm, the shower arm can be swiveled sideways continuously.



Shaft fastening FIX-IT®
Provides a safe and stable stand for the fittings and is very easy to install.


Kitchen Competence

Simple and transparent.
Product features at a glance.




M-LINE

		MIX	STEEL	MX	M2	OBJEKTA	LOGO NEO	SCOPE
COMFORT	Swivel spout	•	•	•	•	•	•	•
	Pull-out spout	•						•
COMFORT PLUS	Dish sprayer	•	•	•		•		
	Multi-connection	•		•		•		
	Front window assembly	•		•	•	•		•
EXCELLENCE	Sensor							



L-LINE



C-LINE

E-GO

L STEEL

L-INE

L-INE S

E-GO

BINGO
STAR

BINGO
STAR XS

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

•

Surfaces Bathroom

	05	39	87	53	91	45
1926	•					•
AMBA	•					
AMEO	•					
A-QA	•	•		•		
BALANCE	•		•		•	
BINGO STAR	•					
BOZZ	•	•		•		
COCKPIT	•				•	
FIZZ	•		•		•	
FRESHLINE	•					
LOGO	•					
MEDI CARE	•					
NOVA FONTE	•	•		•		
OBJEKTA	•					
PURE&EASY	•				•	
PURE&SOLID	•					
PURE&STYLE	•	•				
ZENTA	•				•	
ZENTA SL	•	•				

05 chrome

39 matt black*

*-RAL 9011

53 matt white*

*-RAL 9016

45 gold plated 23 carat

87 matt black*/ chrome

*-RAL 9011

91 white* / chrome

*-RAL 9003

Surfaces Kitchen

	05	39	66	87	93	F8	96
BINGO STAR	•	•					•
BINGO STAR XS	•	•		•	•		
E-GO	•		•				
L-INE	•	•					
L-INE S	•	•		•	•		
LOGO NEO	•						
M2	•						
MIX	•	•					
MX	•						
OBJEKTA	•						
SCOPE	•						
STEEL						•	
L STEEL						•	
ZENTA	•						

05 chrome

F8 stainless steel brushed

96 stainless steel look

39 matt black* *-RAL 9011

66 deep matt black* *-RAL 9005

87 matt black*/ chrome *-RAL 9011

93 matt white* /chrome *-RAL 9016



LIST OF ARTICLE NUMBERS

Art. no	Page	Art. no	Page	Art. no	Page
10 020 05 -00	203	20 028 05 15	22	20 425 05 39	34
10 020 39 -00	203	20 028 39 15	22	20 425 39 15	26
10 105 05 -00	203	20 118 05 15	24	20 540 05 15	25
10 250 05 -00	203	20 118 05 20	29	20 540 05 20	30
10 255 05 -00	204, 243	20 118 05 39	32	20 540 05 39	33
10 265 05 -00	203	20 118 39 15	24	20 540 39 15	25
10 311 05 -00	204	20 143 05 15	24	20 540 53 15	25
10 411 35 -00	203	20 143 05 20	29	20 543 05 -15	197
10 424 05 -00	202	20 143 05 39	32	20 543 05 -25	197
10 426 05 -00	202	20 143 39 15	24	20 543 05 -35	197
10 426 39 -00	202	20 144 05 15	24	20 543 39 -15	197
10 427 05 -00	202	20 144 05 20	29	20 543 53 -15	197
10 428 05 -00	202	20 144 05 39	32	20 552 05 -15	195
10 432 05 -00	204	20 144 39 15	24	20 552 05 -25	195
10 462 05 -00	204	20 146 05 15	24	20 552 05 -35	195
10 499 05 -00	204	20 146 05 20	29	20 552 39 -15	195
11		20 146 05 39	32	20 552 53 -15	195
11 001 05 15	245	20 146 39 15	24	20 590 05 15	25
11 002 05 15	245	20 216 05 15	23	20 590 05 20	30
11 003 05 08	245	20 216 39 15	23	20 590 05 39	33
11 004 05 08	246	20 216 53 15	23	20 590 39 15	25
11 103 05 15	245	20 244 05 15	23	20 655 05 15	27
11 402 35 -00	202	20 244 39 15	23	20 655 39 15	27
12		20 244 53 15	23	20 655 53 15	27
12 101 05 -00	199	20 245 05 15	23	20 659 05 15	26
12 101 45 -00	199	20 245 39 15	23	20 659 39 15	26
13		20 245 53 15	23	20 659 53 15	26
13 501 05	117	20 266 05 15	22	20 710 05 15	27
13 502 05	124	20 266 39 15	22	20 710 05 20	31
14		20 266 53 15	22	20 710 05 39	34
14 303 05 08	125	20 288 05 15	22	20 710 39 15	27
14 303 05 15	125	20 288 39 15	22	20 710 53 15	27
15		20 288 53 15	22	20 830 05 15	26, 142
15 843 05 -00	129	20 289 05 15	22	20 830 39 15	26, 142
15 844 05 -00	129	20 289 39 15	22	20 830 53 15	26, 142
15 845 05 -00	129	20 289 53 15	22	20 835 05 15	28, 142
15 846 05 -00	129	20 298 05 15	23	20 835 39 15	28, 142
16		20 298 39 15	23	20 835 53 15	28, 142
16 021 05	136	20 298 53 15	23	20 840 05 -15	166
16 021 45	136	20 313 05 15	25	20 840 05 -25	166
16 024 05	137	20 313 05 20	30	20 840 05 -35	167
16 203 05 -00	104	20 313 05 39	33	20 840 39 -15	166
16 203 45 -00	104	20 313 39 15	25	20 840 53 -15	166
20		20 407 05 08	123	20 850 05 -15	175
20 013 05 08	123	20 407 05 15	123	20 850 05 -25	175
20 026 05 15	22	20 425 05 15	26	20 850 05 -35	176
20 026 39 15	22	20 425 05 20	31	20 850 39 -15	175



LIST OF ARTICLE NUMBERS

Art. no	Page
20 850 53 -15	175
21	
21 080 00 -00	208
21 091 00 -00	209
21 300 05 N-00	207
21 315 00 -00	207
21 406 05 -00	207
21 407 05 -00	208
21 408 05 -00	208
21 409 05 -00	208
21 520 00 -00	209
25	
25 101 05 15	123
25 111 05 15	123
25 411 05 15	124
25 413 05 15	124
26	
26 101 05 08	125
26 202 05 08	124
27	
27 103 05	174
27 103 45	174
27 105 05	179
27 105 45	179
27 510 05	189
27 510 45	189
27 514 05	191
27 514 45	191
29	
29 209	134
29 211	134
29 511	135
29 747	133
29 757	133
29 759 00	133
29 809	134
29 811	134
29 911	135
30	
30 015 05 15	225
30 405 05 15	225
31	
31 052 05 08	224
31 052 05 15	224
31 053 05 08	224
31 053 05 15	224
31 055 05 08	224

Art. no	Page
31 453 05 15	225
31 710 05 15	224
31 711 05 15	224
32	
32 004 05 08	123, 242
32 023 05 75	119
32 024 05 75	119
32 126 05 75	119
32 233 05 75	119
32 260 05 75	119
32 416 05 75	120
32 491 05 75	120
32 574 05 75	220
32 576 05 75	220
32 578 05 75	220
32 581 05 75	220
32 650 05 75	121
32 653 05 75	120
32 655 05 75	122
32 764 05 75	121
32 881 05 75	220
32 882 05 75	221
32 904 05 62	212
32 904 05 75	212
32 904 39 75	212
32 906 05 62	212
32 906 05 75	212
32 906 39 75	212
32 934 05 62	212
32 934 05 75	213
32 941 05 62	213
32 941 05 75	213
32 941 39 75	213
32 943 05 62	213
32 943 05 75	213
32 943 39 75	213
32 945 05 62	214
32 945 05 75	214
33	
33 434	130
33 930 05 75	222
33 931 05 75	222
33 933 05 75	222
33 938 05 75	222
34	
34 024 05 75	87
34 025 05 75	87

Art. no	Page
34 028 05 75	85
34 112 05 24	240
34 112 05 34	241
34 113 05 24	240
34 113 05 34	241
34 115 05 24	240
34 198 05 75WR4	86
34 216 05 75	88
34 290 05 75	86
34 290 05 75WR5	87
34 292 05 75	86
34 293 05 75WR4	86
34 382 05 75	85
34 382 05 75WR5	85
34 385 05 75	85
34 388 05 75WR4	85
34 389 05 75WR4	86
34 394 05 75	87
34 423 05 75	88
34 655 05 75	89
34 659 05 75	88
34 681 05 75	88
34 841 05 75	89
34 908 05 24	240
34 908 05 34	240
34 920 05 24	241
34 921 05 24	241
34 922 05 24	241
35	
35 002 05 38	141
35 085 05 64	242
35 100 05 38	77, 140
35 100 39 38	77, 140
35 101 05 38	74, 140
35 101 39 38	74, 140
35 156	132
35 158	132
35 200 05 38	121, 140
35 201 05 38	120, 140
35 203 05 38	59, 140
35 203 39 38	59, 140
35 203 53 38	59
35 330 05 38	242
36	
36 489 05 75	121
36 651 05 75	122



LIST OF ARTICLE NUMBERS

Art. no	Page	Art. no	Page	Art. no	Page
37		38 003	78	38 266 39 76	53
37 023 05 65	94	38 004	79	38 266 53 76	53
37 024 05 65	94	38 016 05 30	56	38 270 05 76	53
37 028 05 65	91	38 027 05 76	55	38 272 05 76	53
37 028 91 65	91	38 028 05 76	55	38 272 39 76	53
37 190 05 65	92	38 028 39 76	55	38 280 05 76	54
37 190 05 65WR5	93	38 028 53 76	55	38 282 05 76	54
37 198 05 65WR4	94	38 100 05	64	38 282 39 76	54
37 282 05 65	90	38 100 05 R	66	38 286 05 76	55
37 282 05 65R	91	38 100 05 WR	65	38 286 39 76	55
37 284 05 65	92	38 100 39	64	38 286 53 76	55
37 285 05 65	90	38 100 39 WR	65	38 288 05 76	54
37 287 05 65	92	38 102 05	63	38 288 39 76	54
37 287 05 65WR5	92	38 105 05	64	38 288 53 76	54
37 289 05 65	91	38 106 05	65	38 293 05 76WR4	54
37 290 05 65	93	38 106 05 WR	66	38 293 39 76	54
37 290 05 65WR5	93	38 116 05 30	56, 117	38 294 05 75	115
37 290 91 65	93	38 118 05 76	56	38 294 05 76	55
37 292 05 65	93	38 118 39 76	56	38 389 05 76WR4	53
37 292 91 65	93	38 198 05 76WR4	54	38 389 39 76	53
37 293 05 65WR4	93	38 198 39 76	54	38 393 05 75	116
37 382 05 65	90	38 200 05	63	38 400 05	70
37 382 05 65WR5	91	38 200 05 WR	65	38 400 05 WR	72
37 382 91 65	90	38 200 39	63	38 400 39	70
37 385 05 65	90	38 202 05	63	38 401 05	71
37 387 05 65	90	38 205 05	64	38 401 05 WR	73
37 388 05 65WR4	91	38 242	130	38 402 05	70
37 389 05 65WR4	92	38 243	130	38 403 05	72
37 419 05 65	96	38 244 05 75	116	38 448 05 76	58
37 420 05 65	96	38 244 05 76	56	38 500 05	70
37 533 05 65	94	38 244 39 76	56	38 501 05	71
37 533 05 65R	94	38 244 53 76	56	38 502 05	71
37 533 91 65	94	38 245 05 75	116	38 503 05	72
37 591 05 65	95	38 245 05 76	55	38 505 05	59
37 592 05 65	95	38 245 39 76	55	38 505 39	59
37 655 05 65	96	38 245 53 76	55	38 505 53	59
37 659 05 65	95	38 250 05 75	114	38 530 05 75	117
37 681 05 65	95	38 251 05 75	114	38 533 05 76	56
37 681 91 65	95	38 255 05 75	115	38 533 39 76	56
37 841 05 65	96	38 257 05 75	116	38 533 53 76	56
37 841 91 65	96	38 260 05 75	114	38 590 05 76	57
37 913 05 75	223	38 262 05 75	114	38 590 39 76	57
37 914 05 75	223	38 263 05 76	53	38 624 N	131
37 924 05 75	223	38 263 39 76	53	38 636	131
38		38 264 05 75	114	38 650 05 75	117
38 001	78	38 265 05 75	115	38 655 05 75	118
38 002	78	38 266 05 76	53	38 655 05 76	60



LIST OF ARTICLE NUMBERS

Art. no	Page	Art. no	Page	Art. no	Page
38 655 39 76	60	40 024 39 75	82	41 024 05 75	45
38 655 53 76	60	40 025 05 75	82	41 025 05 75	45
38 659 05 76	58	40 028 05 75	80	41 026 05 75	44
38 659 39 76	58	40 028 39 75	80	41 028 05 75	44
38 659 53 76	58	40 198 05 75WR4	81	41 029 05 75	44
38 670 05 75	117	40 198 39 75	81	41 216 05 75	47
38 691 05 76	57	40 216 05 75	83	41 244 05 75	46
38 691 39 76	57	40 290 05 75	81	41 245 05 75	46
38 691 53 76	57	40 290 05 75WR5	82	41 296 05 75	45
38 711 05 38	41, 50, 76	40 290 39 75	81	41 298 05 75	45
38 712 05 38	27, 58	40 292 05 75	81	41 298 05 75R	45
38 716 05 76	58	40 292 39 75	81	41 393 05 30	47
38 716 05 76Z	58	40 293 05 75WR4	81	41 393 05 75	46
38 716 39 76	58	40 293 39 75	81	41 424 05 30	49
38 828	131	40 296 05 75	82	41 424 05 75	49
38 828 Z	131	40 296 05 75WR5	82	41 445 05 75	47
38 830 05 45	76, 143	40 296 39 75	82	41 447 05 75	48
38 831 05 76	59	40 382 05 75	80	41 448 05 75	48
38 831 39 76	59	40 382 05 75WR5	81	41 505 05	51
38 831 53 76	59	40 382 39 75	80	41 515 05 75	50
38 835 05 45	78, 143	40 385 05 75	80	41 655 05 75	51
38 870 05 75	118	40 388 05 75WR4	80	41 659 05 75	49
38 901 05 38	41, 50, 77, 144	40 388 39 75	80	41 671 05 75	47
38 902 05 38	27, 59, 144	40 389 05 75WR4	80	41 675 05 75	51
38 911 05 38	41, 50, 77, 144	40 389 39 75	80	41 710 05 75	51
38 912 05 38	27, 59, 145	40 419 05 75	83	41 718 05 75	51
38 925 05 76	60	40 420 05 75	84	41 830 05 75	50, 142
38 925 05 76Z	60	40 655 05 75	84	41 835 05 75	52, 143
38 925 39 76	60	40 655 39 75	84	42	
38 973 05 75	219	40 659 05 75	83	42 023 05 78	113
38 973 05 75WR5	219	40 659 39 75	83	42 025 05 75	115
38 998 05 76	57	40 681 05 75	83	42 026 05 75	115
38 998 39 76	57	40 681 39 75	83	42 200 05 75	234
38 998 53 76	57	40 803 05 75	231	42 200 66 75	234
38 999 05 76	57	40 803 39 75	231	42 210 05 75	234
39		40 841 05 75	83	42 210 66 75	234
39 120 05 -00	160	40 841 39 75	83	42 220 05 75	228
39 120 39 -00	160	40 851 05 75	231	42 220 66 75	228
39 120 53 -00	160	40 851 05 75WR5	231	42 230 05 75	228
39 904 05 62	217	40 851 39 75	231	42 230 66 75	228
39 906 05 62	217	40 851 87 75	231	42 803 05 78	235
39 934 05 62	217	40 851 87 75WR5	231	42 803 05 78WR5	235
39 941 05 62	217	40 851 93 75	231	42 803 39 78	235
39 945 05 62	217	41		42 803 96 78	235
40		41 023 05 75	44	42 814 05 77	230
40 024 05 75	82	41 023 05 75R	44	42 814 39 77	230
				42 816 05 77	230



LIST OF ARTICLE NUMBERS

Art. no	Page	Art. no	Page	Art. no	Page
42 817 05 77	230	48 266 05 65	61	51 211 45 20	99
42 821 05 77	230	48 290 05 65	62	51 407 05	102
42 821 05 77WR5	230	48 290 05 65WR5	63	51 441 05 20	99
42 836 05 78	235	48 290 39 65	62	51 441 45 20	99
42 851 05 78	235	48 292 05 65	62	51 524 05 20	100
42 851 05 78WR5	236	48 293 05 65WR4	62	51 524 05 G5	101
42 851 39 78	235	48 293 39 65	62	51 524 45 20	100
42 851 96 78	235	48 298 05 65	62	51 524 45 G4	101
42 852 05 78	236	48 298 39 65	62	51 525 05 20	100
42 852 05 78WR5	236	48 389 05 65WR4	61	51 525 45 20	100
42 855 05 78	236	48 389 39 65	61	51 610 05 20	102
42 855 05 78WR5	237	48 393 05 65	69	51 610 05 G5	102
42 857 05 78	235	48 424 05 65	76	51 610 45 20	102
42 857 96 78	235	48 448 05 65	75	51 610 45 G4	102
42 859 05 78	236	48 530 05 65	74	51 719 05 20	102, 143
44		48 530 39 65	74	51 719 45 20	102, 143
44 850 F8 60	216	48 590 05 65	75	51 720 05 20	102, 144
44 851 F8 60	216	48 600 05	77	51 720 05 G5	103, 143
45		48 655 05 65	78	51 720 45 20	102, 144
45 803 F8 77	229	48 659 05 65	76	51 720 45 G4	103, 143
45 851 F8 77	229	48 670 05 65	74	51 803 05 20	104
46		48 670 39 65	74	51 803 45 20	104
46 803 05 78	238	48 870 05 65	77	51 815 05 20	103
46 803 39 78	238	48 870 39 65	77	51 815 45 20	103
46 851 05 78	238	48 998 05 65	74	51 816 05 20	103
46 851 05 78WR5	238	48 998 39 65	74	51 816 45 20	103
46 851 39 78	238	48 999 05 65	74	51 817 05 20	101
46 851 87 78	238	49		51 817 45 20	101
46 851 93 78	238	49 402 05 -00	187	51 818 05 20	101
48		49 402 05 -00WR9	187	51 818 45 20	101
48 027 05 65	67	51		51 843 05 20	104
48 027 39 65	67	51 010 05 20	97	51 843 45 20	104
48 028 05 65	67	51 010 05 G5	97	51 848 05 20	101
48 198 05 65WR4	62	51 010 45 20	97	51 848 45 20	101
48 198 39 65	62	51 010 45 G4	97	51 849 05 20	104
48 244 05 65	69	51 012 05 20	97	51 849 45 20	104
48 245 05 65	68	51 012 45 20	97	52	
48 247 05 65	68	51 014 05 20	99	52 023 05 75	35
48 247 39 65	68	51 043 05 20	98	52 023 05 75WR5	35
48 248 05 65	68	51 043 05 G5	99	52 023 87 75	35
48 256 05 65	67	51 043 45 20	98	52 023 87 75WR5	35
48 256 05 65WR5	67	51 043 45 G4	99	52 023 91 75	35
48 256 39 65	67	51 046 05 20	97	52 023 91 75WR5	35
48 260 05 65	61	51 046 05 G5	98	52 026 05 75	35
48 262 05 65	61	51 046 45 20	97	52 026 87 75	35
48 263 05 65	61	51 046 45 G4	98	52 026 91 75	35
48 263 39 65	61	51 211 05 20	99	52 100 05	36



LIST OF ARTICLE NUMBERS

Art. no	Page
52 100 05 WR	37
52 100 91	36
52 105 05	38
52 200 05	35
52 200 05 WR	36
52 200 91	35
52 202 05	37
52 216 05 75	39
52 216 8775	39
52 216 91 75	39
52 246 05 75	39
52 246 8775	39
52 246 91 75	39
52 247 05 75	39
52 247 8775	39
52 296 05 75	38
52 296 8775	38
52 296 91 75	38
52 298 05 75	38
52 298 05 75WR5	38
52 298 8775	38
52 298 8775WR5	38
52 298 91 75	38
52 298 91 75WR5	38
52 445 05 75	39
52 445 8775	39
52 445 91 75	39
52 447 05 75	40
52 503 05	41
52 503 87	41
52 503 91	41
52 590 05 75	40
52 590 8775	40
52 590 91 75	40
52 655 05 75	42
52 655 8775	42
52 655 91 75	42
52 659 05 75	40
52 710 05 75	42
52 710 8775	42
52 710 91 75	42
52 729 05 75	42, 142
52 815 05 75	43
52 830 05 75	41, 142
52 830 8775	41, 142
52 846 05 75	42
52 847 05 75	42

Art. no	Page
53	
53 023 05 75	105
53 023 05 75R	105
53 026 05 75	105
53 028 05 75	105
53 029 05 75	105
53 216 05 75	107
53 216 05 75WR5	107
53 244 05 75	107
53 245 05 75	106
53 296 05 75	106
53 298 05 75	106
53 298 05 75R	106
53 445 05 75	107
53 447 05 75	108
53 515 05 75	109
53 590 05 75	108
53 650 05 75	108
53 655 05 75	109
53 710 05 75	109
53 718 05 75	109
53 811	134
53 830 05 75	109, 144
53 971 05	111
53 972 05	112
53 974 05	111
53 975 05	110
53 976 05	110
53 977 05	110
53 979 05	111
53 980 05	111
53 981 05	111
53 984 05	110
53 985 05	110
59	
59 574 05 75	215
59 578 05 75	215
60	
60 531 05 -00	196
60 537 05 -00	196
60 539 05 -00	196
60 540 05 -00	198
60 547 05 -00	199
60 547 39 -00	199
61	
61 055 05 -00	194
61 056 05 -00	194

Art. no	Page
61 057 05 -00	194
61 071 05 -00	194
61 071 39 -00	194
61 071 91 -00	194
61 072 05 -00	194
61 072 39 -00	194
61 072 91 -00	194
61 150 00 -00	207
61 502 05 -00	242
61 503 05 -00	243
61 506 05 -00	243
62	
62 095 05 -00	180
62 119 05 -00	200
62 191 05 -00	188
62 353 05 -00	191
63	
63 050 05 -00	196
63 050 43 -00	196
63 060 05 -00	198
63 060 39 -00	198
63 060 43 -00	198
63 061 05 -00	198
63 061 39 -00	198
63 061 43 -00	198
64	
64 101 10 -00	148
64 320 05 -00	183
64 320 05 -00WR9	183
64 325 05 -00	183
64 325 05 -00WR9	183
64 325 87 -00	183
64 325 91 -00	183
64 330 05 -00	184
64 330 05 -00WR9	184
64 330 53 -00	184
64 330 87 -00	184
64 330 91 -00	184
64 340 05 -00	184
64 340 05 -00WR9	184
64 340 87 -00	184
64 340 91 -00	184
64 400 05 -00	182
64 420 05 -00	184
64 420 05 -00WR9	185
64 425 05 -00	185
64 425 05 -00WR9	185



LIST OF ARTICLE NUMBERS

Art. no	Page	Art. no	Page	Art. no	Page
64 425 91 -00	185	66 534 91 -00	190	67 840 05 -00	169
64 430 05 -00	185	66 535 05 -00	192	67 840 91 -00	169
64 430 05 -00WR9	185	66 535 91 -00	192	67 850 05 -00	176
64 430 91 -00	185	66 541 05 -00	188	67 850 91 -00	176
64 440 05 -00	186	66 543 05 -00	190	67 870 05 -00	177
64 440 05 -00WR9	186	66 544 05 -00	190	67 870 91 -00	177
64 440 91 -00	186	66 545 05 -00	192	67 900 05 -00	160
64 450 05 -00	182	67		67 900 05 -00WR9	160
64 500 05 -00	160	67 083 05 -00	189	67 900 43 -00	160
64 500 05 -00WR9	160	67 090 05 -00	154	67 930 05 -00	168
64 520 05 -00	186	67 090 05 -00WR9	155	67 930 05 -00WR9	168
64 530 05 -00	186	67 092 05 -00	149	67 940 05 -00	167
64 530 05 -00WR9	186	67 092 05 -00WR9	149	67 940 91 -00	167
64 530 91 -00	186	67 093 05 -00	156	67 950 05 -00	176
64 552 05 -00	195	67 096 05 -00	154	67 950 91 -00	176
64 870 05 -00	182	67 511 05 -00	182	68	
64 870 05 -00WR9	182	67 578 05 -00	189	68 010 05 -00	177
64 880 05 -00	183	67 578 05 -00WR9	189	68 030 05 -00	177
64 880 87 -00	183	67 600 05 -00	163	68 082 39 -00	150
64 880 91 -00	183	67 600 05 -00WR9	163	68 083 05 -00	153
65		67 600 39 -00	163	68 083 05 -00WR9	153
65 540 05 -00	197	67 640 05 -00	174	68 085 05 -00	152
65 543 05 -00	197	67 640 87 -00	174	68 085 05 -00WR6	152
65 551 05 -00	195	67 640 91 -00	174	68 091 05 -00	155
65 551 43 -00	195	67 650 05 -00	179	68 092 05 -00	150
65 560 05 -00	198	67 650 87 -00	179	68 093 05 -00	156
65 562 05 -00	198	67 650 91 -00	179	68 094 05 -00	151
65 641 05 -00	180	67 670 05 -00	179	68 095 05 -00	151
66		67 670 91 -00	179	68 100 05 -00	161
66 510 05 -00	187	67 700 05 -00	162	68 100 05 -00WR9	161
66 511 05 -00	187	67 700 05 -00WR9	162	68 100 05 R-00	162
66 513 05 -00	190	67 700 39 -00	162	68 160 05 -00	172
66 514 05 -00	190	67 700 43 -00	162	68 190 05 -00	171
66 514 39 -00	190	67 740 05 -00	173	68 300 05 -00	162
66 514 53 -00	190	67 740 05 -00WR9	173	68 300 05 -00WR9	162
66 514 87 -00	190	67 740 87 -00	173	68 300 39 -00	162
66 514 91 -00	190	67 740 87 -00WR9	173	68 363 05 -00	170
66 515 05 -00	192	67 740 91 -00	173	68 363 05 -00WR9	171
66 515 39 -00	192	67 740 91 -00WR9	173	68 393 05 -00	170
66 515 87 -00	192	67 750 05 -00	178	68 575 05 -00	158
66 515 91 -00	192	67 750 87 -00	178	68 578 05 -00	158
66 521 05 -00	187	67 750 91 -00	178	68 642 05 -00	172
66 530 05 -00	188	67 800 05 -00	161	68 670 05 -00	178
66 530 05 -00WR9	188	67 800 05 -00WR9	161	70	
66 531 05 -00	188	67 800 05 R-00	161	70 346 05 -00	206
66 533 05 -00	191	67 800 43 -00	161	71	
66 534 05 -00	190	67 830 05 -00	169	71 080 05 -00	208



LIST OF ARTICLE NUMBERS

Art. no	Page
71 370 05 -00	209
71 520 05 -00	209
71 826 05 -00	207
73	
73 006 00 -00	128
73 390 05 -00	252
73 575 00 -00	132
74	
74 001 00 -00	128
74 030 05 -00	218
74 129 00 -00	248
74 233 05 -00	130
74 266 00 -00	254
74 329 00 -00	244
74 366 00 -00	249
74 370 05 -00	251
74 470 00 -00	251
74 580 00 -00	128
74 598 00 -00	248
74 750 00 -00	249
74 805 00 -00	248
74 809 00 -00	250
74 839 05 -00	252
74 868 00 -00	249
74 883 00 -00	254
74 927 00 -00	251
74 947 00 -00	250
75	
75 010 05 -00	222
75 025 00 -00	246
75 054 00 -00	246
75 055 00 -00	246
75 068 05 -00	251
75 079 05 -00	135
75 201 00 -00	247
75 205 05 -00	252
75 218 00 -00	246
75 260 05 -00	253
75 263 00 -00	251
75 312 00 -00	244
75 375 05 -00	252
75 407 05 -00	226
75 408 05 -00	226
75 421 05 -00	125, 225
75 422 05 -00	126, 225
75 484 00 -00	244
75 526 00 -00	247

Art. no	Page
75 570 00 -00	247
75 571 00 -00	247
75 605 00 -00	248
75 607 00 -00	249
75 727 05 -00	133
75 730 05 -00	133
75 731 05 -00	132
75 810 00 -00	249
75 895 05 -00	253
75 980 05 -00	131
75 981 05 -00	131
75 982 05 -00	125
75 997 00 -00	244
76	
76 071 05 -00	79
76 148 46 -00	136
76 149 46 -00	136
76 156 05 -00	137
76 360 05 -00	126, 226
76 361 05 -00	126, 226
76 390 00 -00	250
76 400 00 -00	247
76 416 05 -00	252
76 424 00 -00	130
76 539 00 -00	128
76 552 04 -00	253
76 619 00 -00	250
76 661 00 -00	132
76 729 00 -00	250
76 760 05 -00	223
76 790 00 -00	73
76 837 00 -00	244
76 856 00 -00	248
78	
78 122 00 -00	245
78 782 05 -00	135
78 794 05 -00	135
78 802 05 -00	136
78 812 05 -00	136
80	
80 050 05 -00	148
80 200 91 -00	148
82	
820 272 35-00	206
83	
830 274 00-00	254
830 288 00-00	254

Art. no	Page
84	
845 008 05-00	205
845 016 05-00	205
845 025 05-00	205
845 066 05-00	205
845 146 05-00	205
88	
88 011	128
88 088	129
92	
920 699 05-00	219
929 073 00-00	253
929 077 00-00	253
929 128 00-00	254
93	
930 989 05-00	200
930 990 05-00	200





Bathroom



Bathroom

BATHROOM

Smart Luxury

FITTINGS

NOVA FONTE	22	BOZZ	53
BALANCE	35	ZENTA SL	61
AMEO	44		

Pure Function

PURE&STYLE	80	PURE&EASY	90
PURE&SOLID	85		

1926	97	ZENTA	114
AMBA	105	OBJEKTA	119
BINGO STAR	113	STANDARD	123

FLEXX.BOXX & PRE-INSTALLATION SETS





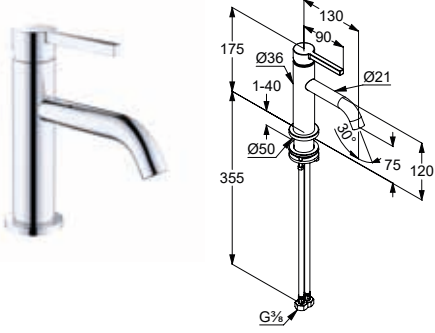



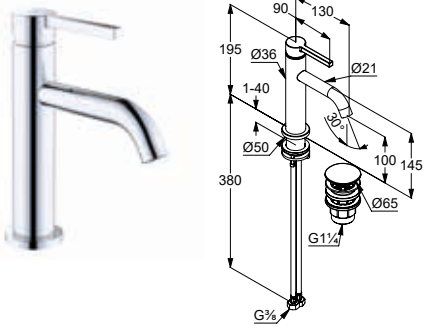



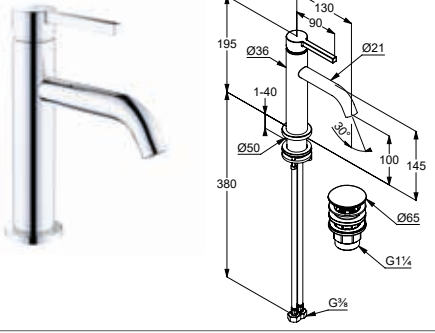



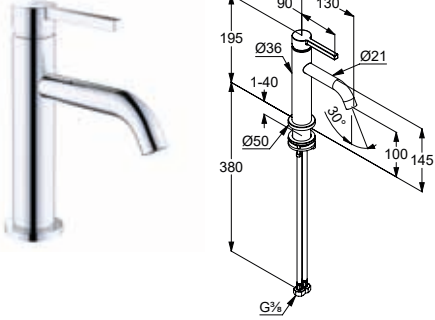


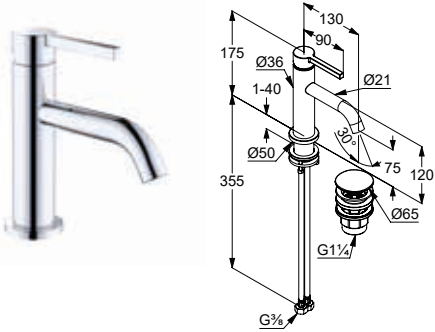
FLEXX.BOXX	128	Pre-installation sets	130
------------	-----	-----------------------	-----

THERMOSTAT

Thermostat surface-mounted	140	Thermostat concealed	142
----------------------------	-----	----------------------	-----



KLUDI NOVA FONTE PURA

product	product description	surface	art. no.
<p>Basin</p> 	<p>KLUDI NOVA FONTE Pura single lever basin mixer 75 DN 15 wing handle, metal single hole mounted ceramic cartridge caché s-pointer-aerator M 18,5 x 1 flow rate 4,3 l/min at 3 bar PUSH-OPEN waste G 1 1/4 flexible hoses G 3/8 with shank fastening spout height lower edge 75 mm</p>	<p>chrome matt black matt white</p>   	<p>202660515 202663915 202665315</p> <p>NEW</p>
	<p>KLUDI NOVA FONTE Pura single lever basin mixer 75 DN 15 wing handle, metal single hole mounted ceramic cartridge caché s-pointer-aerator M 18,5 x 1 flow rate 4,3 l/min at 3 bar without pop-up waste flexible hoses G 3/8 with shank fastening spout height lower edge 75 mm</p>	<p>chrome matt black</p>   	<p>200280515 200283915</p>
	<p>KLUDI NOVA FONTE Pura single lever basin mixer 100 DN 15 wing handle, metal single hole mounted ceramic cartridge caché s-pointer-aerator M 18,5 x 1 flow rate 4,3 l/min at 3 bar PUSH-OPEN waste G 1 1/4 flexible hoses G 3/8 with shank fastening spout height lower edge 100 mm</p>	<p>chrome matt black matt white</p>   	<p>202880515 202883915 202885315</p> <p>NEW</p>
	<p>KLUDI NOVA FONTE Pura single lever basin mixer 100 DN 15 wing handle, metal single hole mounted EcoPlus centre position cold water ceramic cartridge caché eco s-pointer-aerator M 18,5 x 1 flow rate 4,3 l/min at 3 bar PUSH-OPEN waste G 1 1/4 flexible hoses G 3/8 with shank fastening spout height lower edge 100 mm</p>	<p>chrome matt black matt white</p>   	<p>202890515 202893915 202895315</p> <p>NEW</p>
	<p>KLUDI NOVA FONTE Pura single lever basin mixer 100 DN 15 wing handle, metal single hole mounted ceramic cartridge caché s-pointer-aerator M 18,5 x 1 flow rate 4,3 l/min at 3 bar without pop-up waste flexible hoses G 3/8 with shank fastening spout height lower edge 100 mm</p>	<p>chrome matt black</p>   	<p>200260515 200263915</p> <p>NEW</p>




KLUDI NOVA FONTE PURA

product

product description

surface

art. no.

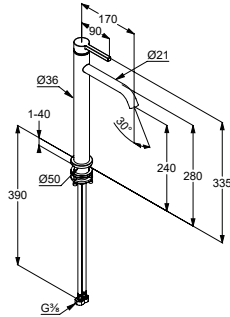


KLUDI NOVA FONTE Pura
single lever washbowl mixer DN 15
 wing handle, metal
 single hole mounted
 ceramic cartridge
 caché s-pointer-aerator M 18,5 x 1
 flow rate 4,3 l/min at 3 bar
 without pop-up waste
 flexible hoses G 3/8
 with shank fastening
 spout height lower edge 240 mm

chrome
 matt black
 matt white

202980515
202983915
202985315



NEW

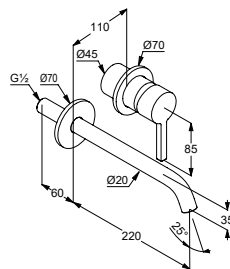

KLUDI NOVA FONTE Pura
concealed two hole wall mounted basin mixer
 trim set
 wing handle, metal
 caché s-pointer-aerator M 18,5 x 1
 flow rate 4,3 l/min at 3 bar
 projection wall spout 220 mm

chrome
 matt black
 matt white

202450515
202453915
202455315




NEW



required accessories:
 installation set DN 15
 for concealed two hole wall mounted
 basin mixer

38242



KLUDI NOVA FONTE Pura
concealed two hole wall mounted basin mixer
 trim set
 wing handle, metal
 caché s-pointer-aerator M 18,5 x 1
 flow rate 4,3 l/min at 3 bar
 projection wall spout 180 mm

chrome
 matt black
 matt white

202440515
202443915
202445315




NEW



required accessories:
 installation set DN 15
 for concealed two hole wall mounted
 basin mixer

38242

Bidet



KLUDI NOVA FONTE Pura
single lever bidet mixer DN 15
 wing handle, metal
 single hole mounted
 ceramic cartridge
 caché s-pointer-aerator M 18,5 x 1
 flow rate 4,3 l/min at 3 bar
 metal pop-up waste G 1 1/4
 flexible hoses G 3/8
 with shank fastening
 spout height lower edge 80 mm

chrome
 matt black
 matt white

202160515
202163915
202165315



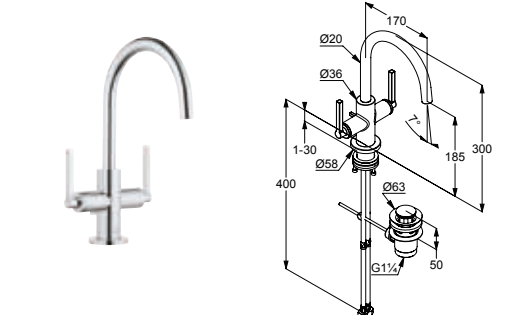



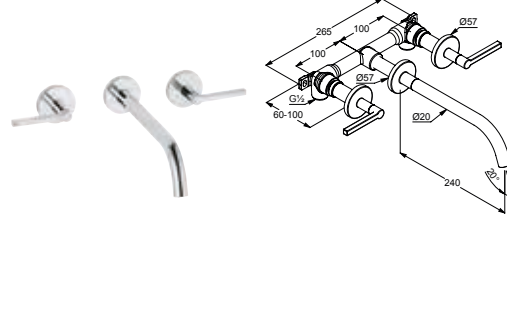

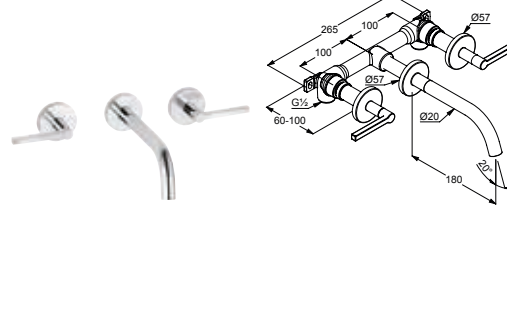



NEW



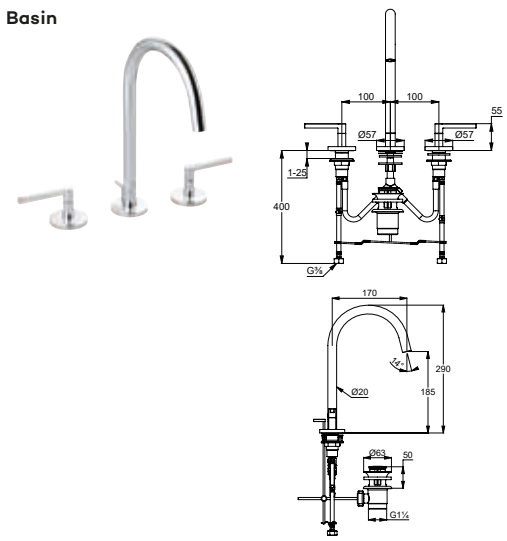




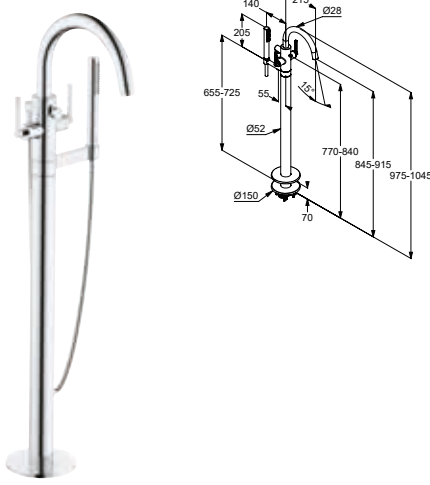



KLUDI NOVA FONTE PURISTIC

product	product description	surface	art. no.
<p>Basin</p> 	<p>KLUDI NOVA FONTE Puristic three-hole basin mixer DN 15 wing handles, metal three hole assembling Aerator M 18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar swivelling (150° / 360°) or lockable spout flexible pressure hoses G 3/8 with shank fastening metal pop-up waste G 1 1/4 spout height lower edge 185 mm</p>	<p>chrome matt black</p> 	<p>201430515 201433915</p>
	<p>KLUDI NOVA FONTE Puristic basin mixer DN 15 wing handles, metal single hole mounted Aerator M 18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar swivelling (150° / 360°) or lockable spout flexible pressure hoses G 3/8 with shank fastening metal pop-up waste G 1 1/4 spout height lower edge 185 mm</p>	<p>chrome matt black</p>   	<p>201180515 201183915</p>
	<p>KLUDI NOVA FONTE Puristic wall mounted basin mixer DN 15 for concealed installation projection wall spout 240 mm wing handles, metal Aerator M 18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar pre-installation set and trim set</p>	<p>chrome matt black</p> 	<p>201460515 201463915</p>
	<p>KLUDI NOVA FONTE Puristic wall mounted basin mixer DN 15 for concealed installation projection wall spout 180 mm wing handles, metal Aerator M 18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar pre-installation set and trim set</p>	<p>chrome matt black</p> 	<p>201440515 201443915</p>


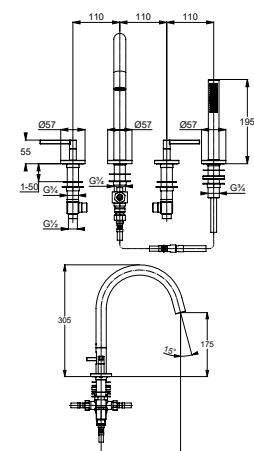






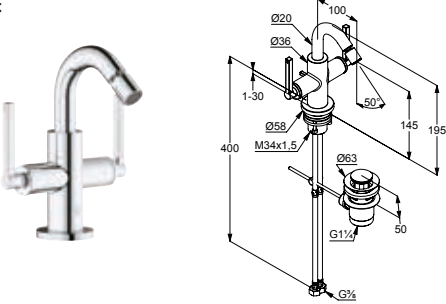
KLUDI NOVA FONTE PURISTIC

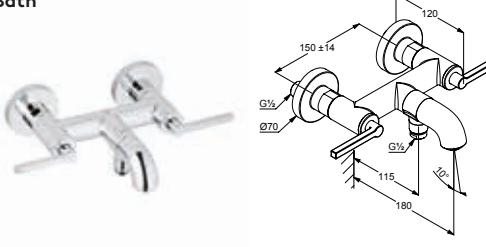product	product description	surface	art. no.
<p>Bidet</p> 	<p>KLUDI NOVA FONTE Puristic bidet mixer DN 15 single hole mounted wing handles, metal Soft-Start ceramic headpart 90° Aerator M 18,5 x 1 PCA laminar with ball joint flow rate 6,2 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 with shank fastening spout height lower edge 145 mm</p>	<p>chrome matt black</p>  	<p>203130515 203133915</p>
<p>Bath</p> 	<p>KLUDI NOVA FONTE Puristic bath- and shower mixer DN 15 wing handles, metal Soft-Start ceramic headpart 90° wall fastening autom. diverter shower/bathtub protected against back flow flow regulator s-pointer M 24 x 1 flow rate 23 l/min at 3 bar shower outlet G 1/2 s-connections</p>	<p>chrome matt black matt white</p> 	<p>205400515 205403915 205405315</p>
	<p>KLUDI NOVA FONTE Puristic bath- and shower mixer DN 15 installation for free standing bathtub wing handles, metal Soft-Start ceramic headpart 90° flow regulator s-pointer M 24 x 1 flow rate 27 l/min at 3 bar autom. diverter shower/bathtub protected against back flow KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1250 mm hand shower KLUDI NOVA FONTE</p> <p>required accessories: KLUDI FLEXX.BOXX concealed unit DN 20</p>	<p>chrome matt black</p> 	<p>205900515 205903915</p> <p>88088</p>















KLUDI NOVA FONTE PURISTIC

product	product description	surface	art. no.
 	<p>KLUDI NOVA FONTE Puristic bath- and shower mixer DN 15 four hole tiles deck mounted installation stand assembly wing handles, metal Soft-Start ceramic headpart 90° flow regulator s-pointer M 24 x 1 flow rate 27 l/min at 3 bar autom. diverter shower/bathtub protected against back flow pull-out hand shower shower hose 1500 mm flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm projection 215 mm</p> <p>required accessories: mounting plate pre-installation set for four hole mixer</p> <p>KLUDI ROTEXA bath rim assembly kit</p>	chrome matt black	204250515 204253915 7614846-00 chrome 7878205-00
 	<p>KLUDI NOVA FONTE Puristic concealed single lever bath and shower mixer concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow rate 29 l/min at 3 bar autom. diverter shower/bathtub with PUSH & SWITCH Button</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome matt black matt white	206590515 206593915 206595315 <div style="background-color: #333; color: white; padding: 2px; text-align: center; font-weight: bold;">NEW</div> 88011
 	<p>KLUDI NOVA FONTE Puristic concealed thermostatic bath- and shower mixer concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve hot water safety device 40 °C flow class B P-IX 18444/IIIC</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome matt black matt white 	208300515 208303915 208305315 <div style="background-color: #333; color: white; padding: 2px; text-align: center; font-weight: bold;">NEW</div> 88011





KLUDI NOVA FONTE PURISTIC

product	product description	surface	art. no.
	 <p>KLUDI PUSH concealed mixer with push-button on/off control for two outlets ceramic cartridge with hot water limitation metal rotating handle round escutcheon</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome	387120538
	 <p>KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C round escutcheon</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	389020538
	 <p>KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for two outlets hot water safety device 38 °C round escutcheon</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	389120538
Shower	  <p>KLUDI NOVA FONTE Puristic shower mixer DN 15 wing handles, metal Soft-Start ceramic headpart 90° wall fastening protected against back flow flow rate 21 l/min at 3 bar shower outlet G 1/2 s-connections</p>	chrome matt black matt white	207100515 207103915 207105315
	 <p>KLUDI NOVA FONTE Puristic concealed single lever shower mixer concealed valve with functional unit solid lever ceramic cartridge with hot water limitation</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome matt black matt white	206550515 206553915 206555315
			NEW
			88011



KLUDI NOVA FONTE PURISTIC

product



**KLUDI NOVA FONTE
Puristic**
concealed thermostatic shower mixer
concealed valve with functional unit
with ceramic shut-off valve
hot water safety device 40 °C
flow rate 20 l/min at 3 bar
P-IX 18444/IIIC

required accessories:
KLUDI FLEXX.BOXX
concealed body DN 20

surface

chrome
matt black
matt white



art. no.







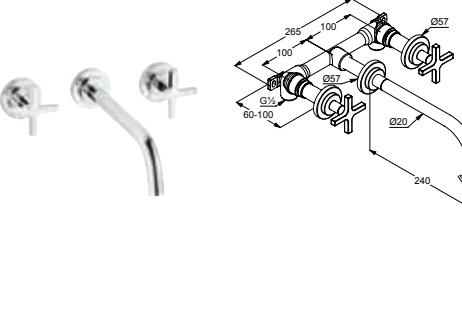

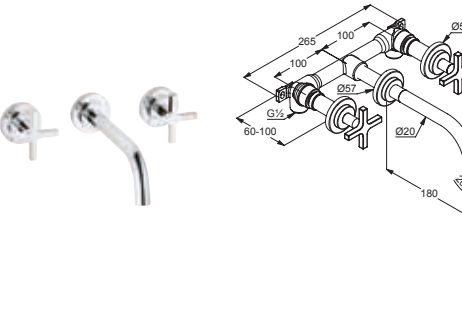

208350515
208353915
208355315

NEW

88011









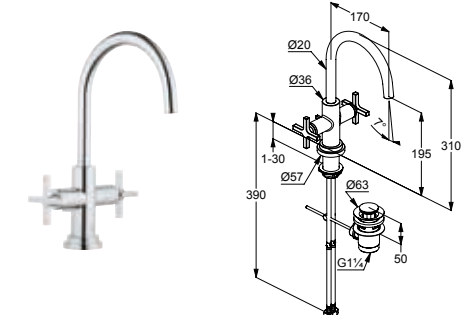KLUDI NOVA FONTE CLASSIC

product	product description	surface	art. no.
<p>Basin</p> 	<p>KLUDI NOVA FONTE Classic three-hole basin mixer DN 15 cross handles, metal three hole assembling Aerator M 18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar swivelling (150° / 360°) or lockable spout flexible pressure hoses G 3/8 with shank fastening metal pop-up waste G 1 1/4 spout height lower edge 185 mm</p>	<p>chrome</p> 	<p>201430520</p>
	<p>KLUDI NOVA FONTE Classic basin mixer DN 15 cross handles, metal single hole mounted Aerator M 18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar swivelling (150° / 360°) or lockable spout flexible pressure hoses G 3/8 with shank fastening metal pop-up waste G 1 1/4 spout height lower edge 185 mm</p>	<p>chrome</p>   	<p>201180520</p>
	<p>KLUDI NOVA FONTE Classic wall mounted basin mixer DN 15 for concealed installation projection wall spout 240 mm cross handles, metal Aerator M 18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar pre-installation set and trim set</p>	<p>chrome</p> 	<p>201460520</p>
	<p>KLUDI NOVA FONTE Classic wall mounted basin mixer DN 15 for concealed installation projection wall spout 180 mm cross handles, metal Aerator M 18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar pre-installation set and trim set</p>	<p>chrome</p> 	<p>201440520</p>



KLUDI NOVA FONTE CLASSIC

product	product description	surface	art. no.
Bidet	  <p>KLUDI NOVA FONTE Classic bidet mixer DN 15 single hole mounted cross handles, metal Soft-Start ceramic headpart 90° Aerator M 18,5 x 1 PCA laminar with ball joint flow rate 6,2 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 with shank fastening spout height lower edge 155 mm</p>	chrome	203130520
Bath	  <p>KLUDI NOVA FONTE Classic bath- and shower mixer DN 15 cross handles, metal Soft-Start ceramic headpart 90° wall fastening autom. diverter shower/bathtub protected against back flow flow regulator s-pointer M 24 x 1 flow rate 23 l/min at 3 bar shower outlet G 1/2 s-connections</p>	chrome	205400520
	 <p>KLUDI NOVA FONTE Classic bath- and shower mixer DN 15 installation for free standing bathtub cross handles, metal Soft-Start ceramic headpart 90° flow regulator s-pointer M 24 x 1 flow rate 27 l/min at 3 bar autom. diverter shower/bathtub protected against back flow KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1250 mm hand shower KLUDI NOVA FONTE</p> <p>required accessories: KLUDI FLEXX.BOXX concealed unit DN 20</p>	chrome	205900520
			88088




KLUDI NOVA FONTE CLASSIC

product

product description

surface

art. no.

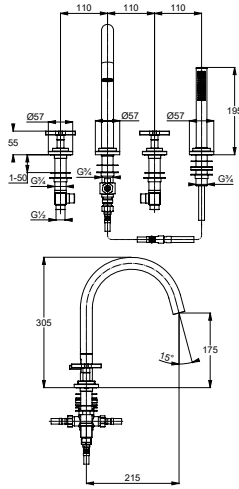

KLUDI NOVA FONTE Classic bath- and shower mixer DN 15
 four hole tiles deck mounted installation
 stand assembly
 cross handles, metal
 Soft-Start ceramic headpart 90°
 flow regulator s-pointer M 24 x 1
 flow rate 27 l/min at 3 bar
 autom. diverter shower/bathtub
 protected against back flow
 pull-out hand shower
 shower hose 1500 mm
 flexible high pressure supply hoses
 G 1/2 x G 1/2 x 400 mm
 projection 215 mm

required accessories:
 mounting plate
 pre-installation set for four hole mixer

KLUDI ROTEXA
 bath rim assembly kit

chrome


204250520

7614846-00

chrome

7878205-00

Shower




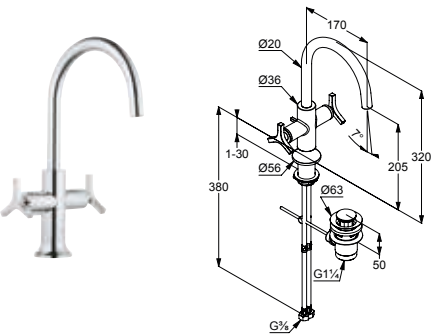
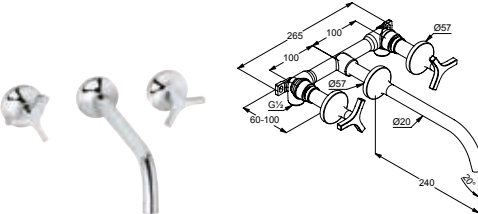
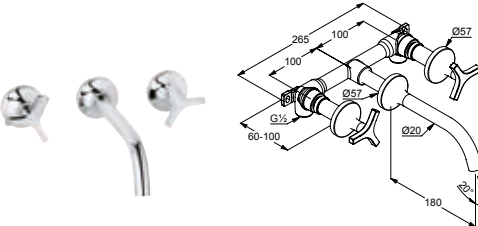
KLUDI NOVA FONTE Classic shower mixer DN 15
 cross handles, metal
 Soft-Start ceramic headpart 90°
 wall fastening
 protected against back flow
 flow rate 21 l/min at 3 bar
 shower outlet G 1/2
 s-connections

chrome

207100520



KLUDI NOVA FONTE DÉCO

product	product description	surface	art. no.
<p>Basin</p> 	<p>KLUDI NOVA FONTE Déco three-hole basin mixer DN 15 Star handles, metal three hole assembling Aerator M 18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar swivelling (150° / 360°) or lockable spout flexible pressure hoses G 3/8 with shank fastening metal pop-up waste G 1 1/4 spout height lower edge 185 mm</p>	chrome	201430539
	<p>KLUDI NOVA FONTE Déco basin mixer DN 15 Star handles, metal single hole mounted Aerator M 18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar swivelling (150° / 360°) or lockable spout flexible pressure hoses G 3/8 with shank fastening metal pop-up waste G 1 1/4 spout height lower edge 185 mm</p>	chrome	201180539
	<p>KLUDI NOVA FONTE Déco wall mounted basin mixer DN 15 for concealed installation projection wall spout 240 mm Star handles, metal Aerator M 18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar pre-installation set and trim set</p>	chrome	201460539
	<p>KLUDI NOVA FONTE Déco wall mounted basin mixer DN 15 for concealed installation projection wall spout 180 mm Star handles, metal Aerator M 18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar pre-installation set and trim set</p>	chrome	201440539



KLUDI NOVA FONTE DÉCO


product

product description

surface

art. no.

Bidet

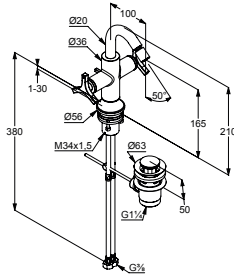


KLUDI NOVA FONTE Déco bidet mixer DN 15
 single hole mounted
 Star handles, metal
 Soft-Start ceramic headpart 90°
 Aerator M 18,5 x 1 PCA laminar with ball joint
 flow rate 6,2 l/min at 3 bar
 metal pop-up waste G 1 1/4
 flexible hoses G 3/8
 with shank fastening
 spout height lower edge 165 mm

chrome

203130539




Bath

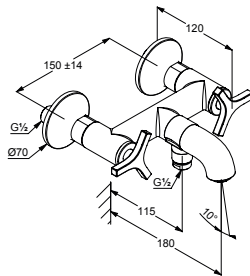

KLUDI NOVA FONTE Déco bath- and shower mixer DN 15
 Star handles, metal
 Soft-Start ceramic headpart 90°
 wall fastening
 autom. diverter shower/bathtub
 protected against back flow
 flow regulator s-pointer M 24 x 1
 flow rate 23 l/min at 3 bar
 shower outlet G 1/2
 s-connections

chrome

205400539



KLUDI NOVA FONTE Déco bath- and shower mixer DN 15
 installation for free standing bathtub
 Star handles, metal
 Soft-Start ceramic headpart 90°
 flow regulator s-pointer M 24 x 1
 flow rate 27 l/min at 3 bar
 autom. diverter shower/bathtub
 protected against back flow
 KLUDI SUPARAFLEX SILVER-hose anti twist
 G 1/2 x G 1/2 x 1250 mm
 hand shower KLUDI NOVA FONTE

chrome

205900539





required accessories:
 KLUDI FLEXX.BOXX
 concealed unit DN 20

88088



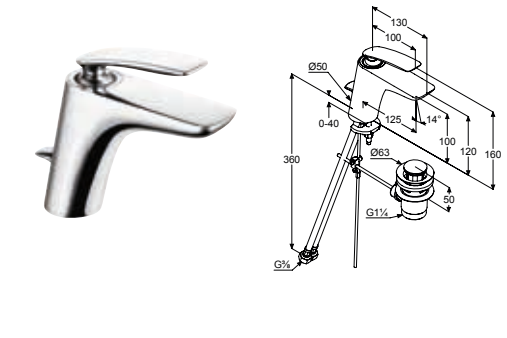

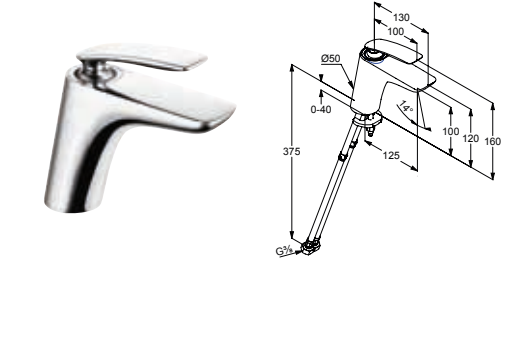

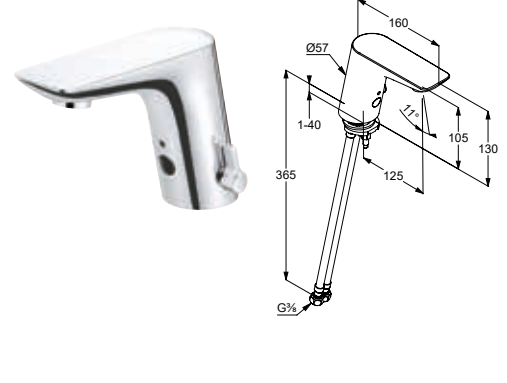



KLUDI NOVA FONTE DÉCO

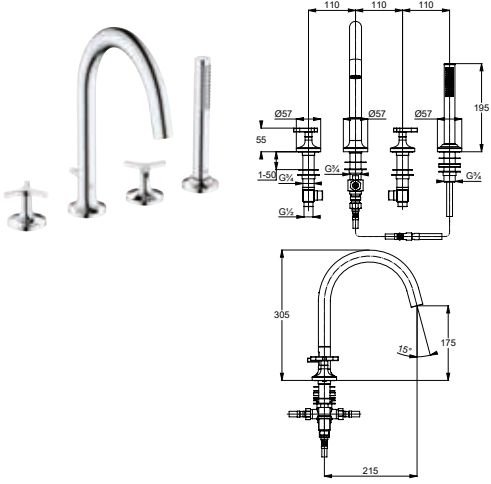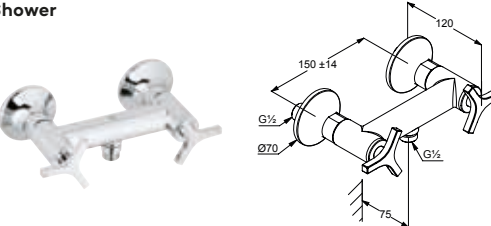product	product description	surface	art. no.
	<p>KLUDI NOVA FONTE Déco bath- and shower mixer DN 15</p> <p>four hole tiles deck mounted installation stand assembly</p> <p>Star handles, metal</p> <p>Soft-Start ceramic headpart 90°</p> <p>flow regulator s-pointer M 24 x 1</p> <p>flow rate 27 l/min at 3 bar</p> <p>autom. diverter shower/bathtub</p> <p>protected against back flow</p> <p>pull-out hand shower</p> <p>shower hose 1500 mm</p> <p>flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm</p> <p>projection 215 mm</p> <p>required accessories:</p> <p>mounting plate 7614846-00</p> <p>pre-installation set for four hole mixer</p> <p>KLUDI ROTEXA bath rim assembly kit</p>	chrome	204250539
<p>Shower</p> 	<p>KLUDI NOVA FONTE Déco shower mixer DN 15</p> <p>Star handles, metal</p> <p>Soft-Start ceramic headpart 90°</p> <p>wall fastening</p> <p>protected against back flow</p> <p>flow rate 21 l/min at 3 bar</p> <p>shower outlet G 1/2</p> <p>s-connections</p>	chrome	207100539



KLUDI BALANCE

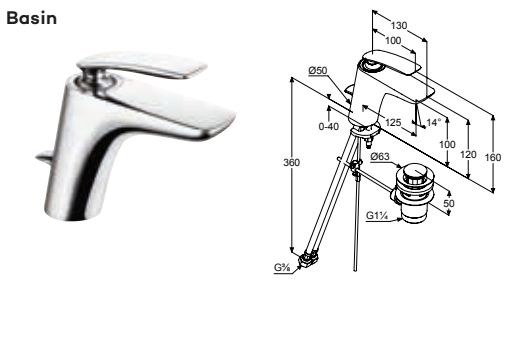product	product description	surface	art. no.
<p>Basin</p> 	<p>KLUDI BALANCE single lever basin mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation caché s - pointer-Laminar-flow-regulator M 24 x 1 flow rate 5 l/min. at 3 bar rapid installation set flexible hoses G 3/8 noise level I pop-up waste G 1 1/4 spout height lower edge 100 mm</p>	<p>chrome white/chrome matt black/ chrome</p> 	<p>520230575 520239175 520238775</p>
	<p>KLUDI BALANCE single lever basin mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation caché s - pointer-Laminar-flow-regulator M 24 x 1 flow rate 3,8 l/min at 3 bar rapid installation set flexible hoses G 3/8 noise level I pop-up waste G 1 1/4 spout height lower edge 100 mm</p>	<p>chrome white/chrome matt black/ chrome</p> 	<p>520230575WR5 520239175WR5 520238775WR5</p>
	<p>KLUDI BALANCE single lever basin mixer DN 15 solid lever single hole mounted ceramic cartridge with hot water limitation caché s - pointer-Laminar-flow-regulator M 24 x 1 flow rate 5 l/min. at 3 bar rapid installation set flexible hoses G 3/8 noise level I without pop-up waste spout height lower edge 100 mm</p>	<p>chrome white/chrome matt black/ chrome</p> 	<p>520260575 520269175 520268775</p>
	<p>KLUDI BALANCE E single hole mounted flow rate 5 l/min. at 3 bar PCA cascade aerator M 24 x 1 with anti-theft device magnet-cartridge unit with presetable temperature control handle optical object-detection with optional hygienic flushing every 12 or 24 hours electronic unit with control device electric power supply via 230 V main adapter backflow preventer without pop-up waste rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves noise level I protected against vandalism spout height lower edge 105 mm</p>	<p>chrome white/chrome</p> 	<p>5220005 5220091</p>




KLUDI BALANCE

product

product description

surface


art. no.

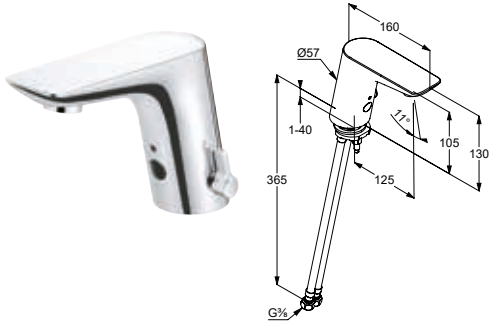

KLUDI BALANCE E
electronic controlled basin mixer DN 15
single hole mounted
flow rate 1,9 l/min at 3 bar
PCA cascade aerator M 24 x 1 with anti-theft device
magnet-cartridge unit
with presetable temperature control handle
optical object-detection
with optional hygienic flushing every 12 or 24 hours
electronic unit with control device
electric power supply via 230 V main adapter
backflow preventer
without pop-up waste
rapid installation set
flexible high pressure supply tubes G 3/8
with dirt catcher sieves
noise level I
protected against vandalism
spout height lower edge 105 mm

chrome

522005WR

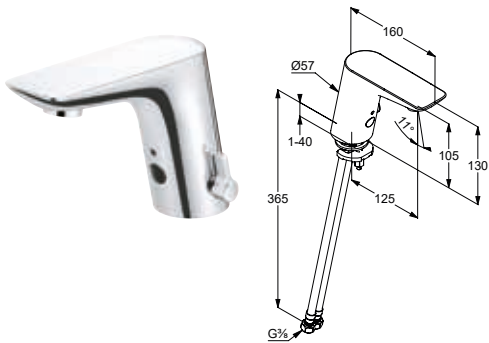

KLUDI BALANCE E
electronic controlled basin mixer DN 15
single hole mounted
flow rate 5 l/min. at 3 bar
PCA cascade aerator M 24 x 1 with anti-theft device
magnet-cartridge unit
with presetable temperature control handle
with optional hygienic flushing every 12 or 24 hours
optical object-detection
electronic unit with battery control device
6 V lithium battery CR-P2, anti theft
backflow preventer
without pop-up waste
rapid installation set
flexible high pressure supply tubes G 3/8
with dirt catcher sieves
noise level I
protected against vandalism
spout height lower edge 105 mm

chrome

5210005

white/chrome


5210091





KLUDI BALANCE

product



product description

KLUDI BALANCE E
electronic controlled basin mixer DN 15
 single hole mounted
 flow rate 1,9 l/min at 3 bar
 PCA cascade aerator M 24 x 1 with anti-theft device
 magnet-cartridge unit
 with presetable temperature control handle
 with optional hygienic flushing every 12 or 24 hours
 optical object-detection
 electronic unit with battery control device
 6 V lithium battery CR-P2, anti theft
 backflow preventer
 without pop-up waste
 rapid installation set
 flexible high pressure supply tubes G 3/8
 with dirt catcher sieves
 noise level I
 protected against vandalism
 spout height lower edge 105 mm


surface

chrome



art. no.

521005WR



KLUDI BALANCE E
electronic controlled basin mixer DN 15
 single hole mounted
 flow rate 5 l/min. at 3 bar
 thief-proof aerator M 24 x 1
 magnet-cartridge unit
 with presetable temperature control handle
 optical object-detection
 with optional hygienic flushing every 12 or 24 hours
 electronic unit with control device
 electric power supply via 230 V main adapter
 without pop-up waste
 rapid installation set
 flexible high pressure supply tubes G 3/8
 with dirt catcher sieves
 noise level I
 protected against vandalism
 for use with displacement heaters
 spout height lower edge 105 mm

chrome



5220205




KLUDI BALANCE

product

product description

surface


art. no.

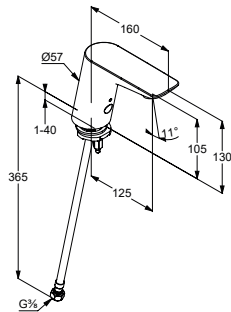

KLUDI BALANCE E
electronic controlled pillar tap DN 15
 single hole mounted
 flow rate 5 l/min. at 3 bar
 thief-proof Cascade-aerator M 24 x 1
 magnet-cartridge unit
 optical object-detection
 with optional hygienic flushing every 12 or 24 hours
 electronic unit with battery control device
 6 V lithium battery CR-P2, anti theft
 backflow preventer
 without pop-up waste
 rapid installation set
 flexible high pressure supply tubes G 3/8
 with dirt catcher sieves
 noise level I
 protected against vandalism
 spout height lower edge 105 mm

chrome


5210505

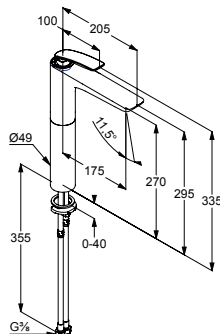

KLUDI BALANCE
single lever washbowl mixer DN 15
 solid lever
 single hole mounted
 ceramic cartridge with hot water limitation
 caché s-pointer-Laminar-flow-regulator M 24 x 1
 flow rate 5 l/min. at 3 bar
 without pop-up waste
 rapid installation set
 flexible hoses G 3/8
 noise level I
 spout height lower edge 270 mm

chrome
white/chrome
matt black/
chrome


522980575
522989175
522988775

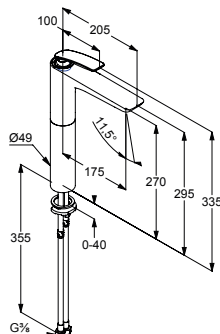

KLUDI BALANCE
single lever washbowl mixer DN 15
 solid lever
 single hole mounted
 flow rate 3,8 l/min at 3 bar
 caché s-pointer-Laminar-flow-regulator M 24 x 1
 ceramic cartridge with hot water limitation
 without pop-up waste
 rapid installation set
 flexible hoses G 3/8
 noise level I
 spout height lower edge 270 mm

chrome
matt black/
chrome
white/chrome

522980575WR5
522988775WR5
522989175WR5

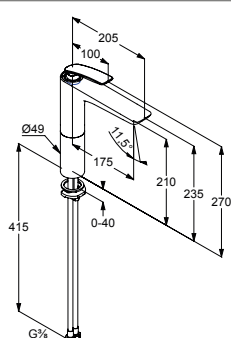

KLUDI BALANCE
single lever washbowl mixer DN 15
 solid lever
 single hole mounted
 ceramic cartridge with hot water limitation
 caché s-pointer-Laminar-flow-regulator M 24 x 1
 flow rate 5 l/min. at 3 bar
 without pop-up waste
 rapid installation set
 flexible hoses G 3/8
 noise level I
 spout height lower edge 210 mm

chrome
white/chrome
matt black/
chrome

522960575
522969175
522968775






KLUDI BALANCE

product

product description

surface

art. no.

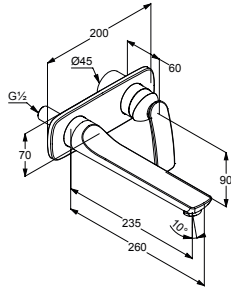


KLUDI BALANCE
concealed two hole wall mounted basin mixer
 trim set
 solid lever
 flow rate 5 l/min. at 3 bar
 PCA s-pointer aerator M 24 x 1
 projection wall spout 235 mm

required accessories:
 installation set DN 15
 for concealed two hole wall mounted
 basin mixer

chrome **522470575**
 matt black/chrome **522478775**



38243

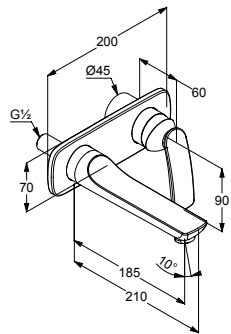

KLUDI BALANCE
concealed two hole wall mounted basin mixer
 trim set
 solid lever
 flow rate 5 l/min. at 3 bar
 PCA s-pointer aerator M 24 x 1
 projection wall spout 185 mm


required accessories:
 installation set DN 15
 for concealed two hole wall mounted
 basin mixer

chrome **522460575**
 white/chrome **522469175**
 matt black/chrome **522468775**



38243

Bidet

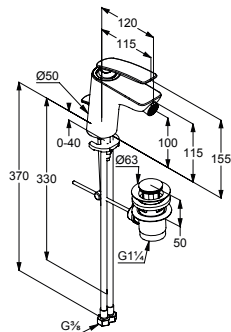


KLUDI BALANCE
single lever bidet mixer DN 15
 single hole mounted
 solid lever
 flow rate 7,6 l/min at 3 bar
 without ball joint
 Eco s-pointer aerator M 24 x 1Z
 ceramic cartridge with hot water limitation
 rapid installation set
 flexible hoses G 3/8
 noise level I
 pop-up waste G 1 1/4
 spout height lower edge 100 mm

chrome **522160575**
 white/chrome **522169175**
 matt black/chrome **522168775**



Bath

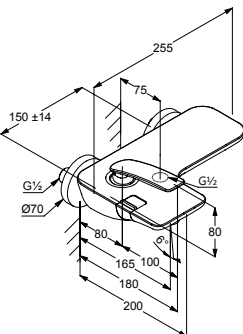

KLUDI BALANCE
single lever bath- and shower mixer DN 15
 solid lever
 wall fastening
 flow class D/B
 s-pointer aerator M 24 x 1D
 ceramic cartridge with hot water limitation
 autom. diverter shower/bathtub
 shower outlet G 1/2
 protected against back flow
 s-connections
 noise level I

chrome **524450575**
 white/chrome **524459175**
 matt black/chrome **524458775**






KLUDI BALANCE

product

product description

surface

art. no.

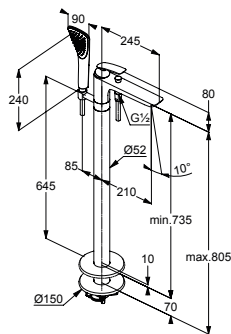


KLUDI BALANCE
single lever bath- and shower mixer DN 15
 installation for free standing bathtub
 solid lever
 ceramic cartridge with hot water limitation
 caché s-pointer-Laminar-flow-regulator M 24 x 1
 flow class B/B
 autom. diverter shower/bathtub
 protected against back flow
 KLUDI SUPARAFLEX hose
 G 1/2 x G 1/2 x 1250 mm
 with KLUDI FIZZ handshower 1S

required accessories:
 KLUDI FLEXX.BOXX
 concealed unit DN 20

chrome **525900575**
 white/chrome **525909175**
 matt black/chrome **525908775**



88088

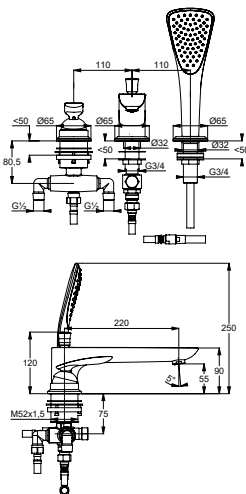

KLUDI BALANCE
single lever bath- and shower mixer DN 15
 stand assembly
 solid lever
 three hole tiles deck mounted installation
 flow class D/B
 flexible high pressure supply hoses
 G 1/2 x G 1/2 x 600 mm
 s-pointer aerator M 24 x 1
 ceramic cartridge with hot water limitation
 autom. diverter shower/bathtub
 protected against back flow
 retractable hand shower
 shower hose 1500 mm
 high pressure supply hose 500 mm
 projection 220 mm
 noise level I
 P-IX 7505/IDB

required accessories:
 mounting plate
 pre-installation set for three hole mixer


chrome **524470575**



7614946-00

KLUDI ROTEXA
 bath rim assembly kit

chrome **7881205-00**



KLUDI BALANCE
concealed single lever bath and shower mixer
 concealed valve with functional unit
 solid lever
 wall fastening
 ceramic cartridge with hot water limitation
 flow rate 29 l/min at 3 bar
 autom. diverter shower/bathtub
 with PUSH & SWITCH Button















required accessories:
 KLUDI FLEXX.BOXX
 concealed body DN 20

chrome **526590575**

88011














KLUDI BALANCE

product	product description	surface	art. no.
	 <p>KLUDI BALANCE concealed thermostatic bath- and shower mixer concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve cylindrical handle, metal hot water safety device 38 °C flow class B P-IX 18444/IIIC</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	<p>chrome matt black/chrome</p> 	<p>528300575 528308775</p>
	 <p>KLUDI PUSH concealed mixer with push-button on/off control for two outlets ceramic cartridge with hot water limitation metal rotating handle soft-edge escutcheon</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	<p>chrome</p>	<p>387110538</p>
	 <p>KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C soft-edge escutcheon</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	<p>chrome</p> 	<p>389010538</p>
	 <p>KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for two outlets hot water safety device 38 °C soft-edge escutcheon</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	<p>chrome</p> 	<p>389110538</p>
	 <p>KLUDI BALANCE bath filler DN 20 wall fastening projection 170 mm flow class C s-pointer aerator M 24 x 1C separate connector G 3/4 for pre-installation</p>	<p>chrome white/chrome matt black/chrome</p> 	<p>5250305 5250391 5250387</p>



KLUDI BALANCE

product	product description	surface	art. no.
Shower	  <p>KLUDI BALANCE single lever shower mixer DN 15 solid lever wall fastening flow class B ceramic cartridge with hot water limitation shower outlet G 1/2 protected against back flow s-connections G 1/2 x G 3/4 noise level I</p>	chrome white/chrome matt black/chrome	527100575 527109175 527108775
	 <p>KLUDI BALANCE concealed single lever shower mixer concealed valve with functional unit solid lever ceramic cartridge with hot water limitation flow class D/C PA-IX 18967/IDC</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome white/chrome matt black/chrome	526550575 526559175 526558775 88011
	 <p>KLUDI BALANCE concealed thermostatic mixer DN 20 concealed valve with functional unit without shut-off valve cylindrical handle, metal hot water safety device 38 °C flow rate 40 l/min at 3 bar</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	527290575 88011
	 <p>KLUDI BALANCE three-way diverter trim set set 2 – trim set consisting of: handle, sleeve, rosette cylindrical handle</p> <p>required accessories: three-way diverter DN 15 set 1 – pre-installation</p>	chrome	528460575 29757
	 <p>KLUDI BALANCE two-way diverter trim set set 2 – trim set consisting of: handle, sleeve, rosette cylindrical handle</p> <p>required accessories: two-way diverter DN 15 set 1 – pre-installation</p>	chrome	528470575 29747




KLUDI BALANCE

product

product description

surface

art. no.



**KLUDI BALANCE
concealed valve**
concealed trim-set
consisting of:
handle, sleeve, rosette
adjustable extension

required accessories:
concealed valve DN 20
connection G 3/4
















chrome

528150575

53811



KLUDI AMEO

product	product description	surface	art. no.
<p>Basin</p> 		<p>KLUDI AMEO single lever basin mixer DN 15 solid lever single hole mounted flow rate 5 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 75 mm</p>	<p>chrome</p> <p>410290575</p> 
		<p>KLUDI AMEO single lever basin mixer DN 15 solid lever single hole mounted flow rate 5 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 75 mm</p>	<p>chrome</p> <p>410280575</p> 
		<p>KLUDI AMEO single lever basin mixer XL DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 5 l/min at 3 bar pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 95 mm</p>	<p>chrome</p> <p>410230575</p> 
		<p>KLUDI AMEO single lever basin mixer XL DN 15 solid lever single hole mounted flow rate 5 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 95 mm</p>	<p>chrome</p> <p>410260575</p> 
		<p>KLUDI AMEO single lever basin mixer XL DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 3,8 l/min at 3 bar pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 95 mm</p>	<p>chrome</p> <p>410230575R</p> 



KLUDI AMEO

product	product description	surface	art. no.
	<p>KLUDI AMEO single lever basin mixer DN 15 solid lever single hole mounted flow rate 5 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation PUSH-OPEN waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 195 mm</p>	chrome   	410250575
	<p>KLUDI AMEO single lever basin mixer DN 15 solid lever single hole mounted flow rate 5 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 195 mm</p>	chrome   	410240575
	<p>KLUDI AMEO single lever washbowl mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 5 l/min at 3 bar without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 270 mm</p>	chrome   	412980575
	<p>KLUDI AMEO single lever washbowl mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 3,8 l/min at 3 bar without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 270 mm</p>	chrome   	412980575R
	<p>KLUDI AMEO single lever washbowl mixer DN 15 solid lever single hole mounted flow rate 5 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 205 mm</p>	chrome   	412960575




KLUDI AMEO

product

product description

surface

art. no.

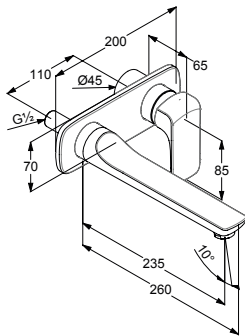

KLUDI AMEO
concealed two hole wall mounted basin mixer
trim set
solid lever
flow rate 5 l/min at 3 bar
PCA s-pointer aerator M 24 x 1
projection wall spout 235 mm

required accessories:
installation set DN 15
for concealed two hole wall mounted
basin mixer

installation set DN 15
for concealed two hole wall mounted
basin mixer


chrome



412450575

38243

38242

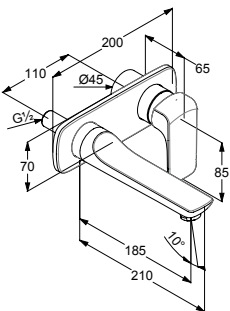

KLUDI AMEO
concealed two hole wall mounted basin mixer
trim set
solid lever
flow rate 5 l/min at 3 bar
PCA s-pointer aerator M 24 x 1
projection wall spout 185 mm

required accessories:
installation set DN 15
for concealed two hole wall mounted
basin mixer

installation set DN 15
for concealed two hole wall mounted
basin mixer


chrome



412440575

38243

38242

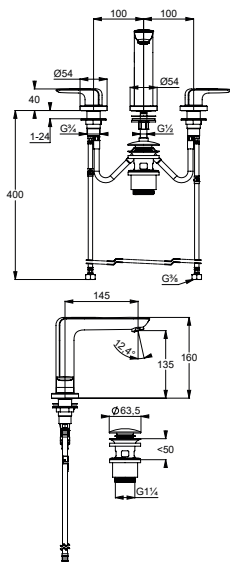

KLUDI AMEO
three-hole basin mixer DN 15
solid lever
three hole assembling
flow rate 5 l/min at 3 bar
PCA s-pointer aerator M 24 x 1
fixed spout
ceramic headpart 90°
rapid installation set
flexible hoses G 3/8
pop-up waste G 1 1/4
spout height lower edge 135 mm


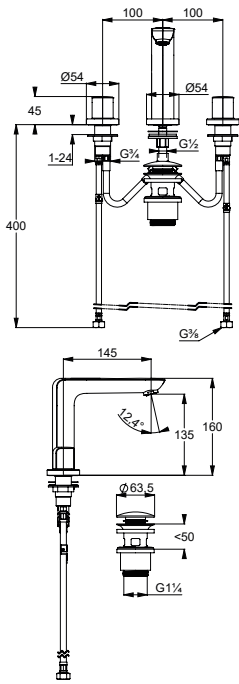












chrome



413930575



KLUDI AMEO

product	product description	surface	art. no.		
		<p>KLUDI AMEO three-hole basin mixer DN 15 cylindric handles three hole assembling flow rate 5 l/min at 3 bar PCA s-pointer aerator M 24 x 1 fixed spout ceramic headpart 90° rapid installation set flexible hoses G 3/8 pop-up waste G 1 1/4 spout height lower edge 135 mm</p>	<p>chrome  </p>	413930530	
Bidet			<p>KLUDI AMEO single lever bidet mixer DN 15 solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 85 mm</p>	<p>chrome  </p>	412160575
Bath			<p>KLUDI AMEO single lever bath- and shower mixer DN 15 solid lever wall fastening ceramic cartridge with hot water limitation flow regulator s-pointer M 24 x 1 flow rate bath 20 l/min at 3 bar, flow rate handshower 24 l/min at 3 bar autom. diverter shower/bathtub protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4</p>	<p>chrome </p>	414450575
		<p>KLUDI AMEO single lever bath- and shower mixer DN 15 solid lever vertically and horizontally adjustable wall fastening flow regulator s-pointer M 24 x 1 flow rate bath 20 l/min at 3 bar, flow rate handshower 24 l/min at 3 bar ceramic cartridge with hot water limitation protected against back flow autom. diverter shower/bathtub shower outlet G 1/2 s-connections</p>	<p>chrome </p>	416710575	





KLUDI AMEO

product

product description

surface

art. no.



KLUDI AMEO
single lever bath- and shower mixer DN 15
 stand assembly
 solid lever
 three hole tiles deck mounted installation
 flow regulator s-pointer M 24 x 1
 flow rate bath 24 l/min at 3 bar,
 flow rate handshower 13 l/min at 3 bar
 ceramic cartridge with hot water limitation
 autom. diverter shower/bathtub
 protected against back flow
 pull-out hand shower
 shower hose 1500 mm
 high pressure supply hose 500 mm
 projection 220 mm

required accessories:
 mounting plate
 pre-installation set for three hole mixer

KLUDI ROTEXA
 bath rim assembly kit

chrome



414470575



chrome

7614946-00

7881205-00



KLUDI AMEO
single lever bath- and shower mixer DN 15
 stand assembly
 solid lever
 three hole tiles deck mounted installation
 flow rate bath 24 l/min at 3 bar,
 flow rate handshower 13 l/min at 3 bar
 ceramic cartridge with hot water limitation
 autom. diverter shower/bathtub
 protected against back flow
 pull-out hand shower
 shower hose 1500 mm
 high pressure supply hose 500 mm
 flexible high pressure supply hoses
 G 1/2 x G 1/2 x 600 mm
 without bath filler

required accessories:
 mounting plate
 pre-installation set for three hole mixer

KLUDI ROTEXA MULTI
 bath filling, waste and overflow set G 1 1/2

KLUDI ROTEXA MULTI
 filling, waste and overflow

KLUDI ROTEXA MULTI
 bath rim assembly kit

chrome

414480575

neutral

7614946-00

2131500-00

chrome






7182605-00

chrome

7880205-00








KLUDI AMEO

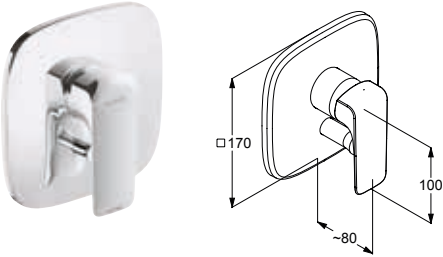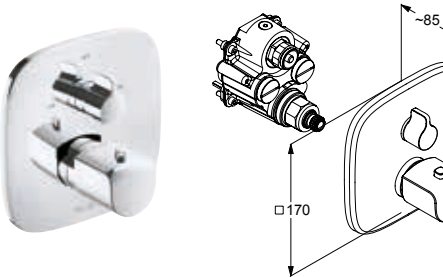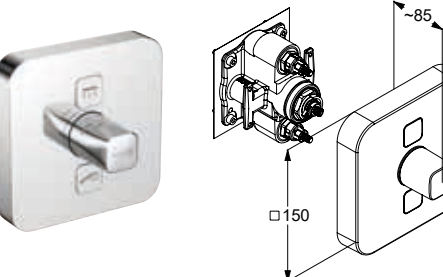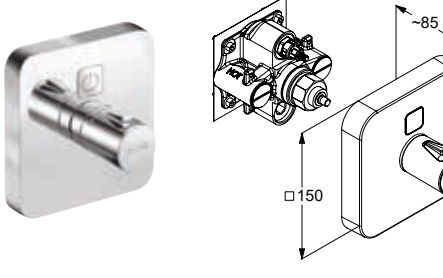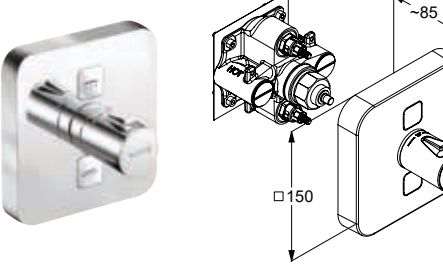product	product description	surface	art. no.
	<p>KLUDI AMEO concealed single lever bath and shower mixer concealed trim-set solid lever autom. diverter shower/bathtub</p> <p>required accessories: concealed mixer DN 15 pre-installation set</p>	chrome	415150575
	<p>KLUDI AMEO concealed thermostatic bath- and shower mixer concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve hot water safety device 38 °C</p> <p>required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	chrome	418300575
	<p>KLUDI PUSH concealed mixer with push-button on/off control for two outlets ceramic cartridge with hot water limitation metal rotating handle soft-edge escutcheon</p> <p>required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	chrome	387110538
	<p>KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C soft-edge escutcheon</p> <p>required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	chrome	389010538
	<p>KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for two outlets hot water safety device 38 °C soft-edge escutcheon</p> <p>required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	chrome	389110538



KLUDI AMEO

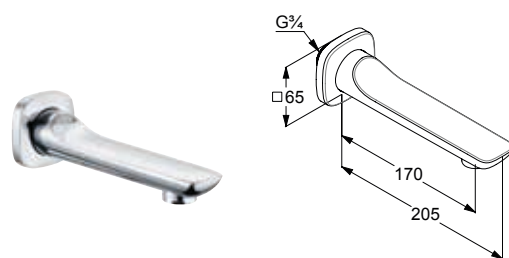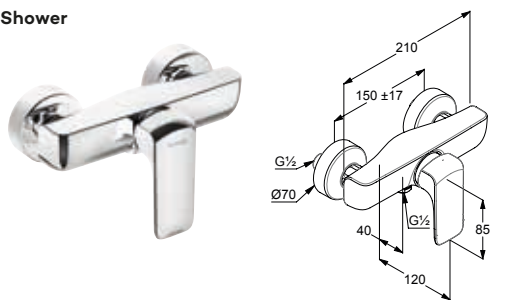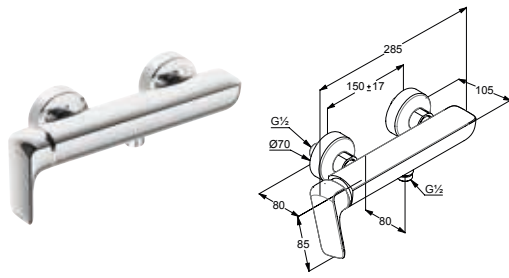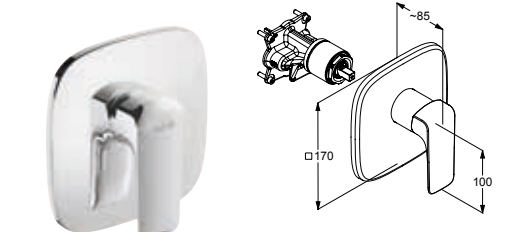product	product description	surface	art. no.
	<p>KLUDI AMEO bath filler DN 20 wall fastening projection 170 mm s-pooter aerator M 24 x 1C flow rate 28 l/min at 3 bar separate connector G 3/4 for pre-installation</p>	chrome	4150505
<p>Shower</p> 	<p>KLUDI AMEO single lever shower mixer DN 15 solid lever flow class B ceramic cartridge with hot water limitation shower outlet G 1/2 protected against back flow s-connections</p>	chrome	417100575
	<p>KLUDI AMEO single lever shower mixer DN 15 solid lever vertically and horizontally adjustable flow class B ceramic cartridge with hot water limitation shower outlet G 1/2 protected against back flow s-connections</p>	chrome	416750575
	<p>KLUDI AMEO concealed single lever shower mixer concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C</p> <p>required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	chrome	416550575
	<p>KLUDI AMEO concealed single lever shower mixer concealed trim-set solid lever</p> <p>required accessories: concealed mixer DN 15 pre-installation set</p>	chrome	417180575




KLUDI AMEO

product

product description

surface

art. no.

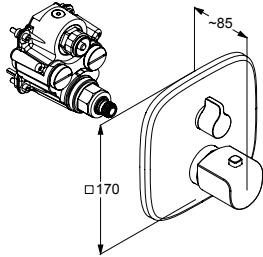

KLUDI AMEO
concealed thermostatic shower mixer
concealed valve with functional unit
with ceramic shut-off valve
hot water safety device 38 °C

required accessories:
KLUDI FLEXX.BOXX
concealed body DN 20

chrome



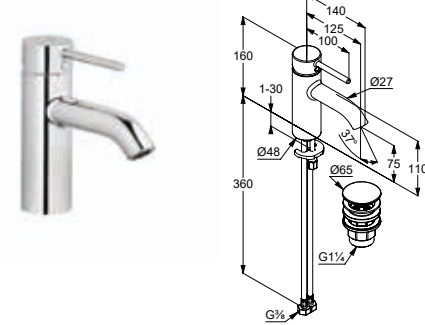

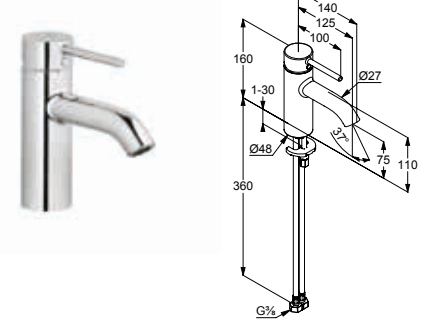

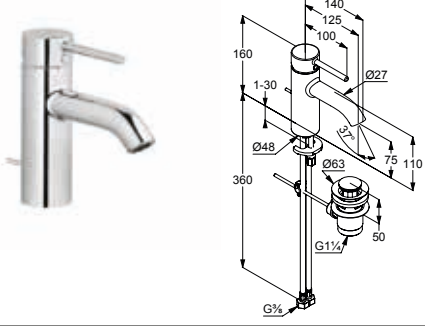

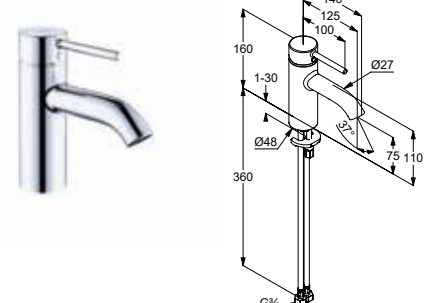



418350575

88011









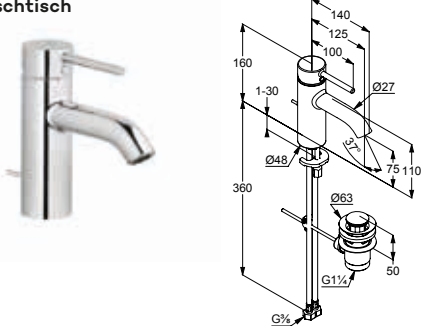















KLUDI BOZZ

product	product description	surface	art. no.
<p>Waschtisch</p> 	<p>KLUDI BOZZ single lever basin mixer 75 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation caché s-pointer-aerator M 18,5 x 1 flow rate 5 l/min. at 3 bar flexible hoses G 3/8 rapid installation set metal pop-up waste G 1 1/4 spout height lower edge 75 mm</p>	<p>chrome</p> 	<p>382700576</p>
	<p>KLUDI BOZZ single lever basin mixer 75 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation caché s-pointer-aerator M 18,5 x 1 flow rate 5 l/min. at 3 bar flexible hoses G 3/8 rapid installation set PUSH-OPEN waste G 1 1/4 spout height lower edge 75 mm</p>	<p>chrome matt black matt white</p> 	<p>382660576 382663976 382665376</p> <p>NEW</p>
	<p>KLUDI BOZZ single lever basin mixer 75 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation caché s-pointer-aerator M 18,5 x 1 flow rate 5 l/min. at 3 bar flexible hoses G 3/8 rapid installation set without pop-up waste spout height lower edge 75 mm</p>	<p>chrome matt black</p> 	<p>382720576 382723976</p>
	<p>KLUDI BOZZ single lever basin mixer 75 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation caché s-pointer-aerator M 18,5 x 1 flow rate 5 l/min. at 3 bar flexible hoses G 3/8 rapid installation set metal pop-up waste G 1 1/4 spout height lower edge 75 mm</p>	<p>chrome matt black</p> 	<p>382630576 382633976</p>
	<p>KLUDI BOZZ single lever basin mixer 75 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation caché s-pointer-aerator M 18,5 x 1 flow rate 3,8 l/min at 3 bar flexible hoses G 3/8 rapid installation set without pop-up waste spout height lower edge 75 mm</p>	<p>chrome matt black</p> 	<p>383890576WR4 383893976</p> <p>NEW</p>



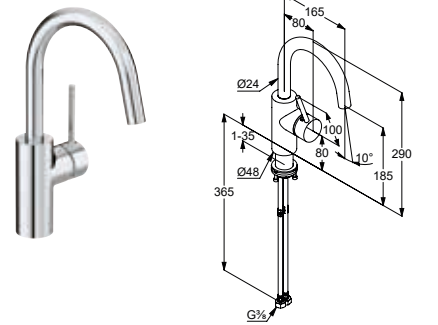

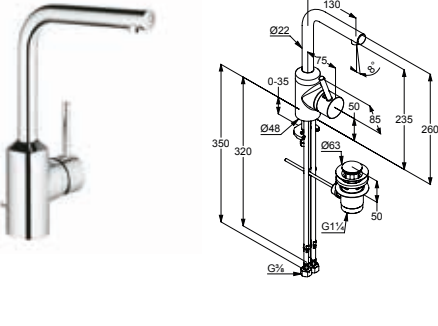

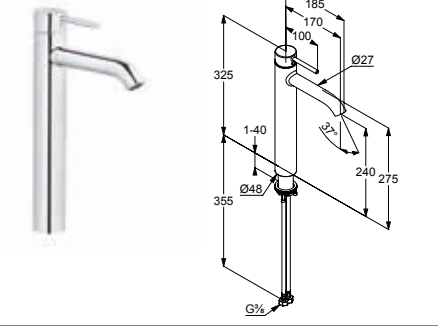



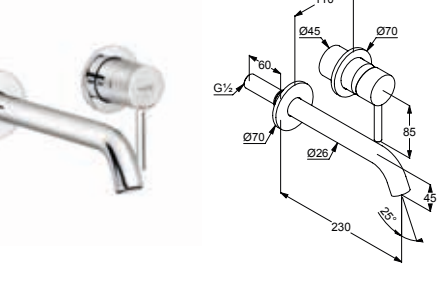




KLUDI BOZZ

product	product description	surface	art. no.		
		<p>KLUDI BOZZ single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation caché s-pointer-aerator M 18,5 x 1 flow rate 5 l/min. at 3 bar flexible hoses G 3/8 rapid installation set metal pop-up waste G 1 1/4 spout height lower edge 100 mm</p>	<p>chrome  </p>	<p>382800576</p>	
		<p>KLUDI BOZZ single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation caché s-pointer-aerator M 18,5 x 1 flow rate 5 l/min. at 3 bar flexible hoses G 3/8 rapid installation set PUSH-OPEN waste G 1 1/4 spout height lower edge 100 mm</p>	<p>chrome matt black matt white  </p>	<p>382880576 382883976 382885376</p>	<p>NEW</p>
		<p>KLUDI BOZZ single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation caché s-pointer-aerator M 18,5 x 1 flow rate 5 l/min. at 3 bar flexible hoses G 3/8 rapid installation set without pop-up waste spout height lower edge 100 mm</p>	<p>chrome matt black  </p>	<p>382820576 382823976</p>	
		<p>KLUDI BOZZ single lever basin mixer 75 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation caché s-pointer-aerator M 18,5 x 1 flow rate 5 l/min. at 3 bar flexible hoses G 3/8 rapid installation set without pop-up waste spout height lower edge 75 mm</p>	<p>chrome matt black   </p>	<p>381980576WR4 381983976</p>	<p>NEW</p>
		<p>KLUDI BOZZ single lever basin mixer 100 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation caché s-pointer-aerator M 18,5 x 1 flow rate 3,8 l/min at 3 bar flexible hoses G 3/8 rapid installation set metal pop-up waste G 1 1/4 spout height lower edge 100 mm</p>	<p>chrome matt black   </p>	<p>382930576WR4 382933976</p>	<p>NEW</p>

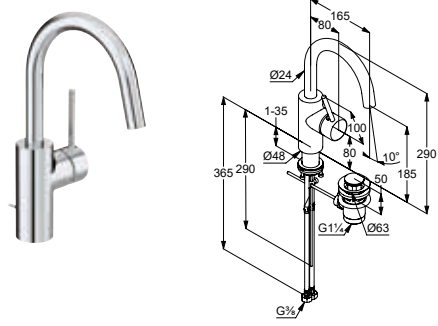











KLUDI BOZZ

product	product description	surface	art. no.
	<p>KLUDI BOZZ single lever basin mixer DN 15 solid lever single hole mounted flow rate 5 l/min. at 3 bar ceramic cartridge with hot water limitation swivelling spout rapid installation set with shank fastening flexible hoses G 3/8 metal pop-up waste G 1 1/4 spout height lower edge 185 mm</p>	<p>chrome</p> 	<p>380270576</p>
	<p>KLUDI BOZZ single lever basin mixer DN 15 solid lever single hole mounted flow rate 5 l/min. at 3 bar ceramic cartridge with hot water limitation swivelling spout rapid installation set with shank fastening flexible hoses G 3/8 without pop-up waste spout height lower edge 185 mm</p>	<p>chrome matt black matt white</p> 	<p>380280576 380283976 380285376</p> <p>NEW</p>
	<p>KLUDI BOZZ single lever basin mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA caché-aerator M 16,5 x 1 flow rate 7 l/min at 3 bar swivelling spout rapid installation set flexible hoses G 3/8 noise level I pop-up waste G 1 1/4 spout height lower edge 235 mm</p>	<p>chrome</p> 	<p>382940576</p>
	<p>KLUDI BOZZ single lever washbowl mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation caché s-pointer-aerator M 18,5 x 1 flow rate 5 l/min. at 3 bar flexible hoses G 3/8 rapid installation set without pop-up waste spout height lower edge 240 mm</p>	<p>chrome matt black matt white</p>   	<p>382860576 382863976 382865376</p> <p>NEW</p>
	<p>KLUDI BOZZ concealed two hole wall mounted basin mixer trim set solid lever flow rate 5 l/min. at 3 bar caché s-pointer-aerator M 24 x 1 rosette diameter 70 mm projection wall spout 230 mm</p> <p>required accessories: installation set DN 15 for concealed two hole wall mounted basin mixer</p>	<p>chrome matt black matt white</p>  	<p>382450576 382453976 382455376</p> <p>NEW</p> <p>38243</p>








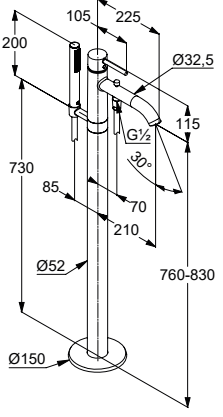



KLUDI BOZZ

product	product description	surface	art. no.
	<p>KLUDI BOZZ concealed two hole wall mounted basin mixer trim set solid lever flow rate 5 l/min. at 3 bar caché s-pointer-aerator M 24 x 1 rosette diameter 70 mm projection wall spout 180 mm</p> <p>required accessories: installation set DN 15 for concealed two hole wall mounted basin mixer</p>	chrome matt black matt white  	382440576 382443976 382445376 <div style="background-color: black; color: white; padding: 2px; display: inline-block;">NEW</div> 38243
	<p>KLUDI BOZZ pillar valve single hole mounted shank fastening G 1/2 spout height lower edge 75 mm</p>	chrome matt black	381180576 381183976
	<p>KLUDI BOZZ pillar tap with head part control unit DN 15 single hole mounted actuation by stick special headpart with spindle outlet aerator M 21,5 x 1 flow rate 4,3 l/min at 3 bar shank fastening G 1/2</p>	chrome	380160530
	<p>KLUDI pillar valve DN 15 cylindrical handle single hole mounted flow rate 8 l/min at 3 bar caché eco s-pointer-aerator M 18,5 x 1 ceramic headpart 90° without pop-up waste</p>	chrome  	381160530
<p>Bidet</p> 	<p>KLUDI BOZZ single lever bidet mixer DN 15 solid lever single hole mounted flow rate 6 l/min at 3 bar ball joint-aerator M 24 x 1 ceramic cartridge with hot water limitation metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set</p>	chrome matt black matt white 	385330576 385333976 385335376 <div style="background-color: black; color: white; padding: 2px; display: inline-block;">NEW</div>



KLUDI BOZZ

product	product description	surface	art. no.
 	<p>KLUDI BOZZ Hygiene set for concealed installation Hygiene set automatic diverter: shower/spray wall supply with shower holder DN 15 shower hose G 1/2 x G 1/2 x 1250 mm Hygiene set automatic diverter: shower/spray</p>	<p>chrome matt black matt white</p>	<p>389980576 389983976 389985376</p> <p>NEW</p>
 	<p>KLUDI BOZZ Hygiene set for concealed installation consisting of: trim set for single lever shower mixer concealed mixer shower hose G 1/2 x G 1/2 x 1250 mm Hygiene set automatic diverter: shower/spray wall supply with shower holder DN 15</p>	<p>chrome</p>	<p>389990576</p>
<p>Bath</p>  	<p>KLUDI BOZZ single lever bath- and shower mixer DN 15 solid lever wall fastening aerator M 24 x 1 flow rate 22 l/min at 3 bar ceramic cartridge with hot water limitation autom. diverter shower/bathtub protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4</p>	<p>chrome matt black matt white</p>	<p>386910576 386913976 386915376</p> <p>NEW</p>
 	<p>KLUDI BOZZ bath- and shower mixer DN 15 installation for free standing bathtub solid lever ceramic cartridge with hot water limitation flow regulator s-pointer M 24 x 1 flow rate 22 l/min at 3 bar autom. diverter shower/bathtub protected against back flow KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1250 mm with hand shower</p> <p>required accessories: KLUDI FLEXX.BOX concealed unit DN 20</p>	<p>chrome matt black</p> 	<p>385900576 385903976</p> <p>88088</p>


















KLUDI BOZZ

product	product description	surface	art. no.
	<p data-bbox="624 367 999 663"> KLUDI BOZZ single lever bath- and shower mixer DN 15 stand assembly three hole tiles deck mounted installation solid lever flow rate 24 l/min at 3 bar s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation autom. diverter shower/bathtub retractable hand shower high pressure supply hose G 1/2 x G 1/2 x 600 mm protected against back flow projection 220 mm </p> <p data-bbox="624 685 967 748"> required accessories: mounting plate pre-installation set for three hole mixer </p> <p data-bbox="624 775 815 817"> KLUDI ROTEXA bath rim assembly kit </p>	chrome	384480576
	<p data-bbox="624 1077 1015 1200"> KLUDI BOZZ concealed single lever bath and shower mixer concealed trim-set solid lever autom. diverter shower/bathtub for concealed bath- and shower mixer DN 15 </p> <p data-bbox="624 1223 986 1285"> required accessories: concealed bath- and shower mixer DN 15 pre-installation set </p>	chrome chrome matt black	387160576 387160576Z 387163976
	<p data-bbox="624 1429 1015 1619"> KLUDI BOZZ concealed single lever bath and shower mixer concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow rate 29 l/min at 3 bar autom. diverter shower/bathtub with PUSH & SWITCH Button </p> <p data-bbox="624 1641 826 1704"> required accessories: KLUDI FLEXX.BOXX concealed body DN 20 </p>	chrome matt black matt white	386590576 386593976 386595376
	<p data-bbox="624 1783 1034 1906"> KLUDI PUSH concealed mixer with push-button on/off control for two outlets ceramic cartridge with hot water limitation metal rotating handle round escutcheon </p> <p data-bbox="624 1928 826 1991"> required accessories: KLUDI FLEXX.BOXX concealed body DN 20 </p>	chrome	387120538







KLUDI BOZZ

product	product description	surface	art. no.
	 <p>KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C round escutcheon</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	389020538
	 <p>KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for two outlets hot water safety device 38 °C round escutcheon</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	389120538
	 <p>KLUDI BOZZ bath filler DN 20 wall fastening projection 160 mm s-pointer aerator M 24 x 1 flow rate 25 l/min at 3 bar with push-on rosette</p>	chrome matt black matt white 	3850505 3850539 3850553 NEW
Shower 	 <p>KLUDI BOZZ single lever shower mixer DN 15 solid lever wall fastening flow rate 28 l/min at 3 bar ceramic cartridge with hot water limitation protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4</p>	chrome matt black matt white 	388310576 388313976 388315376 NEW
	 <p>KLUDI BOZZ thermostatic shower mixer DN 15 wall fastening temperature control handle with hot water safety device 38° C With optional temperature limit stop at 43 °C with shut-off valve flow rate 22 l/min at 3 bar protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4 dirt catcher sieves P-IX 8049/IB</p>	chrome matt black matt white 	352030538 352033938 352035338 NEW



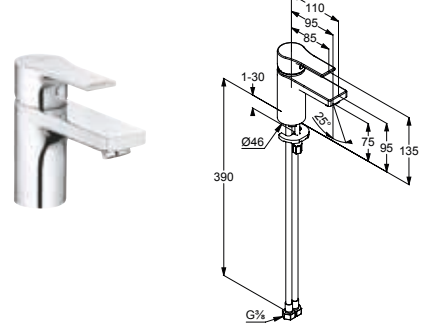

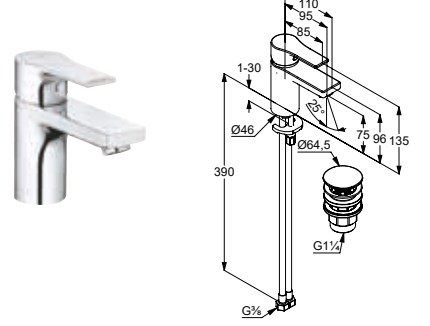

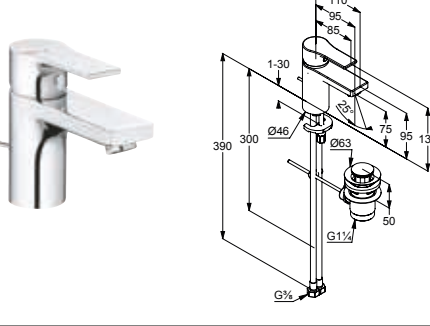







KLUDI BOZZ

product	product description	surface	art. no.
		<p>KLUDI BOZZ concealed single lever shower mixer concealed valve with functional unit solid lever ceramic cartridge with hot water limitation flow rate 25 l/min at 3 bar</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	<p>chrome matt black matt white</p> <p>386550576 386553976 386555376</p> <p>NEW</p> <p>88011</p>
		<p>KLUDI BOZZ concealed single lever shower mixer concealed trim-set solid lever for pre-installation set DN 15</p> <p>required accessories: concealed shower DN 15 pre-installation set</p>	<p>chrome chrome matt black</p> <p>389250576 389250576Z 389253976</p> <p>NEW</p> <p>38828Z</p>

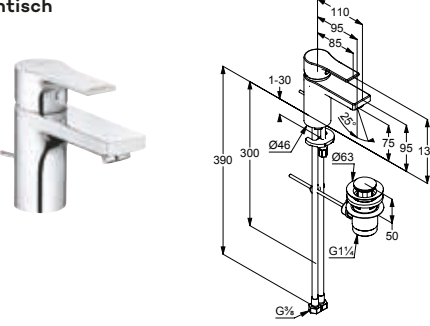

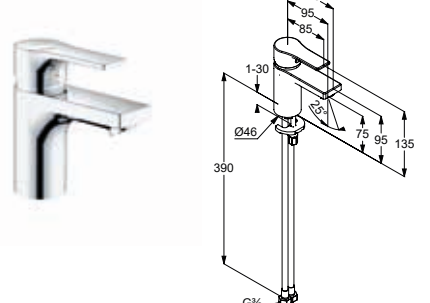KLUDI ZENTA SL

product	product description	surface	art. no.
<p>Waschtisch</p> 	<p>KLUDI ZENTA SL single lever basin mixer 75 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm</p>	<p>chrome</p> 	<p>482600565</p>
	<p>KLUDI ZENTA SL single lever basin mixer 75 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm</p>	<p>chrome</p> 	<p>482620565</p>
	<p>KLUDI ZENTA SL single lever basin mixer 75 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min at 3 bar PUSH-OPEN waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm</p>	<p>chrome</p> 	<p>482660565</p>
	<p>KLUDI ZENTA SL single lever basin mixer 75 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 75 mm</p>	<p>chrome matt black</p>  	<p>482630565 482633965</p> <p>NEW</p>
	<p>KLUDI ZENTA SL single lever basin mixer 75 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 75 mm</p>	<p>chrome matt black</p>  	<p>483890565WR4 483893965</p> <p>NEW</p>





















KLUDI ZENTA SL

product	product description	surface	art. no.
		<p>KLUDI ZENTA SL single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	<p>chrome matt black</p> <p>482900565 482903965</p> <p>NEW</p>
		<p>KLUDI ZENTA SL single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	<p>chrome</p> <p>482920565</p>
		<p>KLUDI ZENTA SL single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min at 3 bar PUSH-OPEN waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	<p>chrome matt black</p> <p>482980565 482983965</p> <p>NEW</p>
		<p>KLUDI ZENTA SL single lever basin mixer 100 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 100 mm</p>	<p>chrome matt black</p> <p>482930565WR4 482933965</p> <p>NEW</p>
		<p>KLUDI ZENTA SL single lever basin mixer 100 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 100 mm</p>	<p>chrome matt black</p> <p>481980565WR4 481983965</p> <p>NEW</p>



KLUDI ZENTA SL


product	product description	surface	art. no.
 	<p>KLUDI ZENTA SL single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	chrome 	482900565WR5 <div style="background-color: black; color: white; padding: 2px; display: inline-block;">NEW</div>
 	<p>KLUDI ZENTA E electronic controlled basin mixer DN 15 single hole mounted flow rate 5 l/min. at 3 bar PCA cascade aerator M 24 x 1 magnet-cartridge unit with mixing shaft optical object-detection electronic unit electric power supply via 230 V main adapter backflow preventer rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves spout height lower edge 75 mm</p>	chrome   	3820205
 	<p>KLUDI ZENTA E electronic controlled basin mixer DN 15 single hole mounted flow rate 5 l/min. at 3 bar PCA cascade aerator M 24 x 1 magnet-cartridge unit with mixing shaft optical object-detection electronic unit 6 V lithium battery CR-P2 backflow preventer rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves spout height lower edge 75 mm</p>	chrome   	3810205
 	<p>KLUDI ZENTA E electronic controlled basin mixer DN 15 single hole mounted flow rate 5 l/min. at 3 bar PCA cascade aerator M 24 x 1 magnet-cartridge unit with temperature control handle optical object-detection electronic unit powered by 230 V mains supply backflow preventer rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves spout height lower edge 75 mm</p>	chrome matt black   	3820005 3820039 <div style="background-color: black; color: white; padding: 2px; display: inline-block;">NEW</div>
	<p>required accessories: Service remote control for electronic mixer</p>	neutral	7679000-00

Bathroom



KLUDI ZENTA SL

product

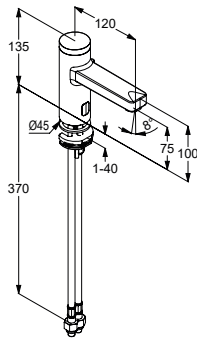

product description

KLUDI ZENTA E
electronic controlled basin mixer DN 15
 single hole mounted
 flow rate 5 l/min. at 3 bar
 PCA cascade aerator M 24 x 1
 magnet-cartridge unit
 with temperature control handle
 optical object-detection
 electronic unit
 6 V lithium battery CR-P2
 backflow preventer
 rapid installation set
 flexible high pressure supply tubes G 3/8
 with dirt catcher sieves
 spout height lower edge 75 mm

required accessories:
 Service remote control
 for electronic mixer

surface

chrome
 matt black




art. no.

3810005
3810039

NEW

neutral

7679000-00

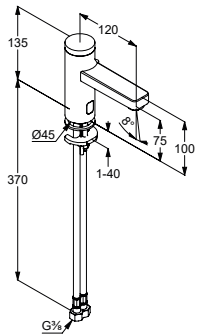

KLUDI ZENTA E

electronic controlled pillar tap DN 15

single hole mounted
 flow rate 5 l/min. at 3 bar
 PCA cascade aerator M 24 x 1
 magnet-cartridge unit
 optical object-detection
 electronic unit
 electric power supply via 230 V main adapter
 backflow preventer
 rapid installation set
 flexible high pressure supply tubes G 3/8
 with dirt catcher sieves
 spout height lower edge 75 mm

required accessories:
 Service remote control
 for electronic mixer


chrome



3820505

neutral

7679000-00

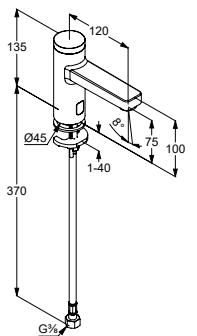

KLUDI ZENTA E

electronic controlled pillar tap DN 15

single hole mounted
 flow rate 5 l/min. at 3 bar
 PCA cascade aerator M 24 x 1
 magnet-cartridge unit
 optical object-detection
 electronic unit
 6 V lithium battery CR-P2
 backflow preventer
 rapid installation set
 flexible high pressure supply tubes G 3/8
 with dirt catcher sieves
 spout height lower edge 75 mm

required accessories:
 Service remote control
 for electronic mixer

chrome



3810505

neutral

7679000-00




KLUDI ZENTA SL

product

product description

surface

art. no.

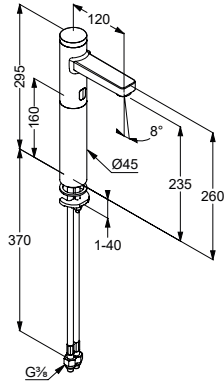

KLUDI ZENTA E
electronic controlled washbowl mixer DN 15
 single hole mounted
 flow rate 5 l/min. at 3 bar
 PCA cascade aerator M 24 x 1
 magnet-cartridge unit
 with temperature control handle
 optical object-detection
 electronic unit
 6 V lithium battery CR-P2
 backflow preventer
 rapid installation set
 flexible high pressure supply tubes G 3/8
 with dirt catcher sieves
 spout height lower edge 230 mm

required accessories:
 Service remote control
 for electronic mixer


chrome

3810605



neutral

7679000-00

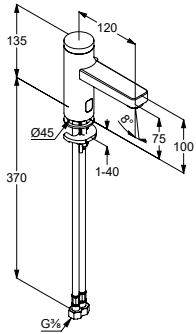

KLUDI ZENTA E
electronic controlled basin mixer DN 15
 single hole mounted
 flow rate 1,9 l/min at 3 bar
 PCA cascade aerator M 24 x 1
 magnet-cartridge unit
 with temperature control handle
 optical object-detection
 electronic unit
 powered by 230 V mains supply
 backflow preventer
 rapid installation set
 flexible high pressure supply tubes G 3/8
 with dirt catcher sieves
 spout height lower edge 75 mm

required accessories:
 Service remote control
 for electronic mixer

chrome


382005WR

NEW



neutral

7679000-00

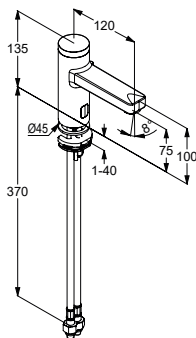

KLUDI ZENTA E
electronic controlled basin mixer DN 15
 single hole mounted
 flow rate 1,9 l/min at 3 bar
 PCA cascade aerator M 24 x 1
 magnet-cartridge unit
 with temperature control handle
 optical object-detection
 electronic unit
 6 V lithium battery CR-P2
 backflow preventer
 rapid installation set
 flexible high pressure supply tubes G 3/8
 with dirt catcher sieves
 spout height lower edge 75 mm

required accessories:
 Service remote control
 for electronic mixer

chrome
matt black

381005WR
3810039WR

NEW




neutral

7679000-00



KLUDI ZENTA SL

product

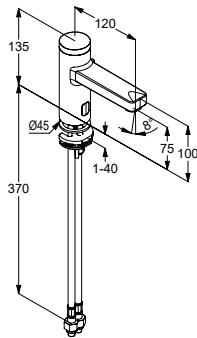

product description

KLUDI ZENTA E
electronic controlled basin mixer DN 15
single hole mounted
flow rate 3,8 l/min at 3 bar
PCA cascade aerator M 24 x 1
magnet-cartridge unit
with temperature control handle
optical object-detection
electronic unit
6 V lithium battery CR-P2
backflow preventer
rapid installation set
flexible high pressure supply tubes G 3/8 with
dirt catcher sieves
spout height lower edge 75 mm

required accessories:
Service remote control
for electronic mixer

surface

chrome




3810005R

NEW

neutral

7679000-00

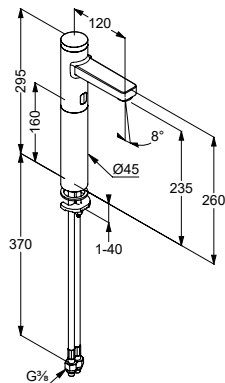

KLUDI ZENTA E
electronic controlled washbowl mixer DN 15
single hole mounted
flow rate 1,9 l/min at 3 bar
PCA cascade aerator M 24 x 1
magnet-cartridge unit
with temperature control handle
optical object-detection
electronic unit
6 V lithium battery CR-P2
backflow preventer
rapid installation set
flexible high pressure supply tubes G 3/8 with
dirt catcher sieves
spout height lower edge 230 mm

required accessories:
Service remote control
for electronic mixer

chrome



3810605WR

neutral

7679000-00




KLUDI ZENTA SL

product

product description

surface

art. no.

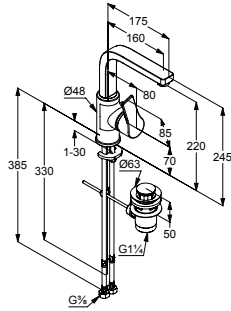


KLUDI ZENTA SL
single lever basin mixer DN 15
 solid lever
 single hole mounted
 ceramic cartridge with hot water limitation
 flow regulator M 24 x 1
 flow rate 5 l/min at 3 bar
 swivelling spout (360°)
 metal pop-up waste G 1 1/4
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 220 mm

chrome
 matt black

480270565
480273965




NEW

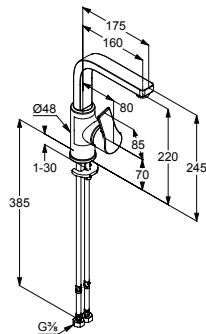

KLUDI ZENTA SL
single lever basin mixer DN 15
 solid lever
 single hole mounted
 ceramic cartridge with hot water limitation
 flow regulator M 24 x 1
 flow rate 5 l/min at 3 bar
 swivelling spout (360°)
 without pop-up waste
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 220 mm

chrome

480280565

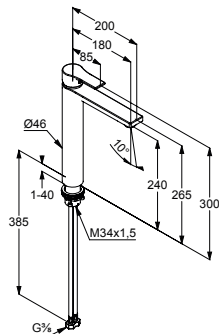


KLUDI ZENTA SL
single lever washbowl mixer DN 15
 solid lever
 single hole mounted
 ceramic cartridge with hot water limitation
 flow regulator M 24 x 1
 flow rate 5 l/min at 3 bar
 without pop-up waste
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 240 mm

chrome
 matt black

482560565
482563965



NEW

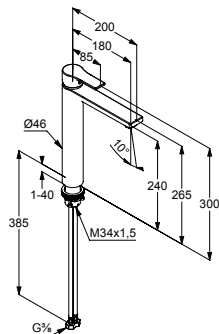

KLUDI ZENTA SL
single lever washbowl mixer DN 15
 solid lever
 single hole mounted
 ceramic cartridge with hot water limitation
 flow regulator M 24 x 1
 flow rate 3,8 l/min at 3 bar
 without pop-up waste
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 240 mm

chrome










482560565WR5



NEW



KLUDI ZENTA SL

product	product description	surface	art. no.
 	<p>KLUDI ZENTA SL concealed two hole wall mounted basin mixer trim set One-piece rosette solid lever flow regulator M 24 x 1 flow rate 5 l/min at 3 bar projection wall spout 230 mm</p> <p>required accessories: installation set DN 15 for concealed two hole wall mounted basin mixer</p> <p>installation set DN 15 for concealed two hole wall mounted basin mixer</p>	chrome 	482480565 38243 38242
 	<p>KLUDI ZENTA SL concealed two hole wall mounted basin mixer trim set One-piece rosette solid lever flow regulator M 24 x 1 flow rate 5 l/min at 3 bar projection wall spout 180 mm</p> <p>required accessories: installation set DN 15 for concealed two hole wall mounted basin mixer</p> <p>installation set DN 15 for concealed two hole wall mounted basin mixer</p>	chrome matt black 	482470565 482473965 NEW 38243 38242
 	<p>KLUDI ZENTA SL concealed two hole wall mounted basin mixer trim set Two-part rosette solid lever flow regulator M 24 x 1 flow rate 5 l/min at 3 bar projection wall spout 230 mm</p> <p>required accessories: installation set DN 15 for concealed two hole wall mounted basin mixer</p> <p>installation set DN 15 for concealed two hole wall mounted basin mixer</p>	chrome 	482450565 38243 38242




KLUDI ZENTA SL

product

product description

surface

art. no.

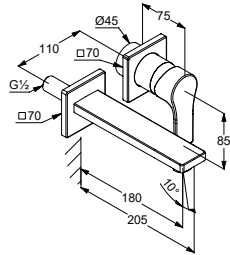

KLUDI ZENTA SL
concealed two hole wall mounted basin mixer
 trim set
 Two-part rosette
 solid lever
 flow regulator M 24 x 1
 flow rate 5 l/min at 3 bar
 projection wall spout 180 mm

chrome

482440565




required accessories:
 installation set DN 15
 for concealed two hole wall mounted
 basin mixer

38243

installation set DN 15
 for concealed two hole wall mounted
 basin mixer

38242

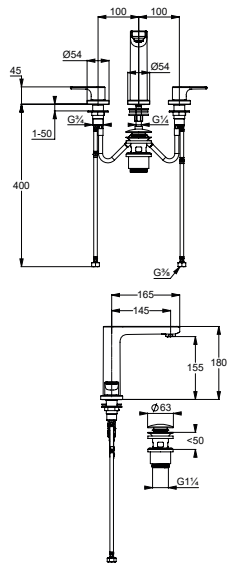

KLUDI ZENTA SL
basin mixer DN 15
 solid lever
 three hole assembling
 flow rate 5 l/min at 3 bar
 PCA s-pointer aerator M 24 x 1
 fixed spout
 ceramic headpart 90°
 rapid installation set
 flexible hoses G 3/8
 spout height lower edge 155 mm

chrome

483930565



Bathroom



KLUDI ZENTA SL

product	product description	surface	art. no.
	<p>KLUDI ZENTA E electronic controlled basin mixer DN 15 trim set soft-edge escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening temperature control handle flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar optical object-detection projection 240 mm</p> <p>required accessories: Service remote control for electronic mixer</p> <p>concealed electronic body DN 15 pre-installation set</p> <p>concealed electronic body DN 15 pre-installation set</p>	chrome matt black 	3840005 3840039
	<p>KLUDI ZENTA E electronic controlled basin mixer DN 15 trim set soft-edge escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening temperature control handle flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar optical object-detection projection 190 mm</p> <p>required accessories: Service remote control for electronic mixer</p> <p>concealed electronic body DN 15 pre-installation set</p> <p>concealed electronic body DN 15 pre-installation set</p>	chrome 	3850005
	<p>KLUDI ZENTA E electronic controlled basin mixer DN 15 trim set soft-edge escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar optical object-detection projection 240 mm</p> <p>required accessories: Service remote control for electronic mixer</p> <p>concealed electronic body DN 15 pre-installation set for cold or premixed water connection</p> <p>concealed electronic body DN 15 pre-installation set for cold or premixed water connection</p>	chrome 	3840205
		neutral 	7679000-00
			38003
			38004





















KLUDI ZENTA SL

product	product description	surface	art. no.
	<p>KLUDI ZENTA E electronic controlled basin mixer DN 15 trim set soft-edge escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar optical object-detection projection 190 mm</p> <p>required accessories: Service remote control for electronic mixer</p> <p>concealed electronic body DN 15 pre-installation set for cold or premixed water connection</p> <p>concealed electronic body DN 15 pre-installation set for cold or premixed water connection</p>	chrome 	3850205
		neutral	7679000-00
			38003
			38004
	<p>KLUDI ZENTA E electronic controlled basin mixer DN 15 trim set round escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening temperature control handle flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar optical object-detection projection 240 mm</p> <p>required accessories: Service remote control for electronic mixer</p> <p>concealed electronic body DN 15 pre-installation set</p> <p>concealed electronic body DN 15 pre-installation set</p>	chrome 	3840105
		neutral	7679000-00
			38001
			38002
	<p>KLUDI ZENTA E electronic controlled basin mixer DN 15 trim set round escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening temperature control handle flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar optical object-detection projection 190 mm</p> <p>required accessories: Service remote control for electronic mixer</p> <p>concealed electronic body DN 15 pre-installation set</p> <p>concealed electronic body DN 15 pre-installation set</p>	chrome 	3850105
		neutral	7679000-00
			38001
			38002



KLUDI ZENTA SL

product	product description	surface	art. no.
	 <p>KLUDI ZENTA E electronic controlled basin mixer DN 15 trim set round escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar optical object-detection projection 240 mm</p> <p>required accessories: Service remote control for electronic mixer</p> <p>concealed electronic body DN 15 pre-installation set for cold or premixed water connection</p> <p>concealed electronic body DN 15 pre-installation set for cold or premixed water connection</p>	chrome     neutral	3840305 7679000-00 38003 38004
	 <p>KLUDI ZENTA E electronic controlled basin mixer DN 15 trim set round escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar optical object-detection projection 190 mm</p> <p>required accessories: Service remote control for electronic mixer</p> <p>concealed electronic body DN 15 pre-installation set for cold or premixed water connection</p> <p>concealed electronic body DN 15 pre-installation set for cold or premixed water connection</p>	chrome     neutral	3850305 7679000-00 38003 38004
	 <p>KLUDI ZENTA E electronic controlled basin mixer DN 15 trim set soft-edge escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening temperature control handle flow regulator M 24 x 1 flow rate 1,9 l/min at 3 bar optical object-detection projection 240 mm</p> <p>required accessories: Service remote control for electronic mixer</p> <p>concealed electronic body DN 15 pre-installation set</p> <p>concealed electronic body DN 15 pre-installation set</p>	chrome     neutral	3840005WR 7679000-00 38001 38002



KLUDI ZENTA SL


product

product description

surface

art. no.

Bidet

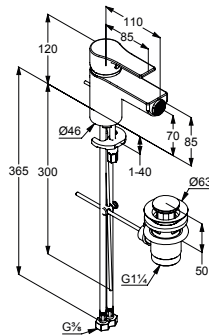


**KLUDI ZENTA SL
single lever bidet mixer DN 15**
solid lever
single hole mounted
ceramic cartridge with hot water limitation
s-pointer eco-aerator M 24 x 1
flow rate 6 l/min at 3 bar
metal pop-up waste G 1 1/4
rapid installation set
flexible hoses G 3/8
spout height lower edge 70 mm

chrome
matt black

**485300565
485303965**



NEW

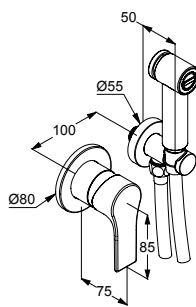


**KLUDI ZENTA SL
Hygiene set**
for concealed installation
consisting of:
trim set for single lever shower mixer
concealed mixer
shower hose G 1/2 x G 1/2 x 1250 mm
Hygiene set
automatic diverter: shower/spray
wall supply with shower holder DN 15

chrome
matt black

**489980565
489983965**

NEW

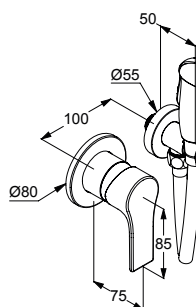


**KLUDI ZENTA SL
Hygiene set**
for concealed installation
consisting of:
trim set for single lever shower mixer
concealed mixer
shower hose G 1/2 x G 1/2 x 1250 mm
Hygiene set
automatic diverter: shower/spray
wall supply with shower holder DN 15

chrome

489990565

Bath

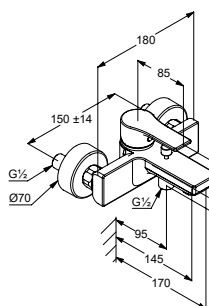


**KLUDI ZENTA SL
single lever bath- and shower mixer DN 15**
solid lever
wall fastening
flow regulator M 24 x 1
flow rate 21 l/min at 3 bar
ceramic cartridge with hot water limitation
protected against back flow
autom. diverter shower/bathtub
shower outlet G 1/2
s-connections G 1/2 x G 3/4

chrome
matt black

**486700565
486703965**

NEW

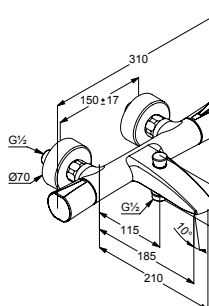

**KLUDI ZENTA SL
thermostatic bath- and shower mixer DN 15**
wall fastening
aerator M 24 x 1/B
temperature control handle
with hot water safety device 38° C
ceramic headpart 90°
flow rate bath 25,2 l/min at 3 bar,
flow rate 17 l/min at 3 bar
autom. diverter shower/bathtub
protected against back flow
shower outlet G 1/2
s-connections G 1/2 x G 3/4
dirt catcher sieves

chrome
matt black

**351010538
351013938**




NEW



KLUDI ZENTA SL

product

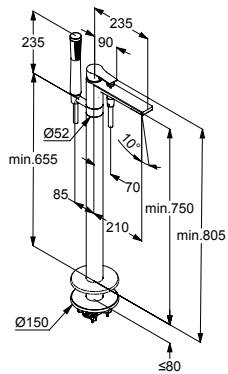

product description

KLUDI ZENTA SL
bath- and shower mixer DN 15
 installation for free standing bathtub
 solid lever
 ceramic cartridge with hot water limitation
 flow regulator s-pointer M 24 x 1
 flow rate 22 l/min at 3 bar
 autom. diverter shower/bathtub
 protected against back flow
 KLUDI SUPARAFLEX SILVER-hose anti twist
 G 1/2 x G 1/2 x 1250 mm
 hand shower KLUDI A-QA 3910005-00

required accessories:
 KLUDI FLEXX.BOX
 concealed unit DN 20

surface


chrome



art. no.

485900565

88088

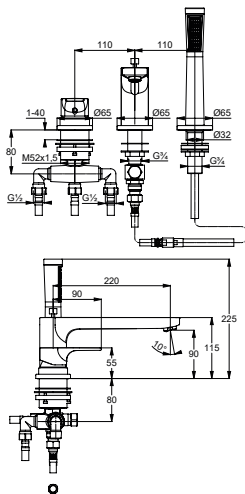

KLUDI ZENTA SL
single lever bath- and shower mixer DN 15
 stand assembly
 three hole tiles deck mounted installation
 solid lever
 flow rate 24 l/min at 3 bar
 s-pointer aerator M 24 x 1
 ceramic cartridge with hot water limitation
 autom. diverter shower/bathtub
 retractable hand shower
 high pressure supply hose
 G 1/2 x G 1/2 x 600 mm
 protected against back flow
 projection 220 mm

required accessories:
 mounting plate
 pre-installation set for three hole mixer

KLUDI ROTEXA
 bath rim assembly kit

chrome



484480565














7614946-00

chrome

7881205-00

















KLUDI ZENTA SL

product	product description	surface	art. no.
	 <p>KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C soft-edge escutcheon</p> <p>required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	chrome 	389010538
	 <p>KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for two outlets hot water safety device 38 °C soft-edge escutcheon</p> <p>required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	chrome 	389110538
	 <p>KLUDI ZENTA SL bath filler DN 15 projection 170 mm wall fastening flow regulator M 24 x 1 flow rate 28 l/min at 3 bar fixed spout connection G 1/2 with wall flange (escutcheon)</p>	chrome	4860005
Shower 	 <p>KLUDI ZENTA SL single lever shower mixer DN 15 solid lever wall fastening flow rate 28 l/min at 3 bar ceramic cartridge with hot water limitation protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4</p>	chrome matt black	488700565 488703965 NEW
	 <p>KLUDI ZENTA SL thermostatic shower mixer DN 15 wall fastening temperature control handle with hot water safety device 38° C with shut-off valve flow rate 25 l/min at 3 bar protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4 dirt catcher sieves PA-IX 18064/1B</p>	chrome matt black 	351000538 351003938 NEW



KLUDI ZENTA SL

product	product description	surface	art. no.	
	 <p>KLUDI ZENTA SL concealed single lever shower mixer concealed valve with functional unit solid lever ceramic cartridge with hot water limitation flow rate 25 l/min at 3 bar</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome	486550565	
	 <p>KLUDI ZENTA SL concealed thermostatic shower mixer concealed valve with functional unit with ceramic shut-off valve hot water safety device 38 °C With optional temperature limit stop at 43 °C P-IX 18444/IIICC</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	388350545	
Accessories	 	<p>concealed electronic body DN 15 pre-installation set without trim set in-wall installation ceramic cartridge powered by 230 V mains supply dirt catcher sieves backflow preventer</p>		38001
		<p>concealed electronic body DN 15 pre-installation set without trim set in-wall installation ceramic cartridge powered by 6 V battery dirt catcher sieves backflow preventer</p>		38002
		<p>concealed electronic body DN 15 pre-installation set without trim set in-wall installation for cold or premixed water connection powered by 230 V mains supply</p>		38003




KLUDI ZENTA SL

product

product description

surface


art. no.

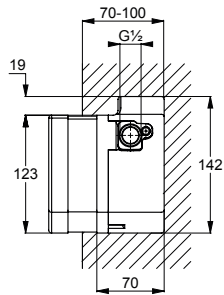

**concealed electronic body DN 15
pre-installation set**
without trim set
in-wall installation
for cold or premixed water connection
powered by 6 V battery



38004

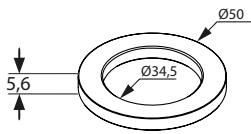




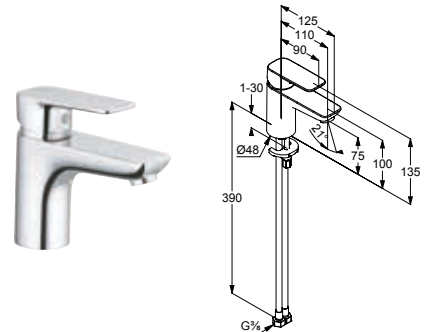

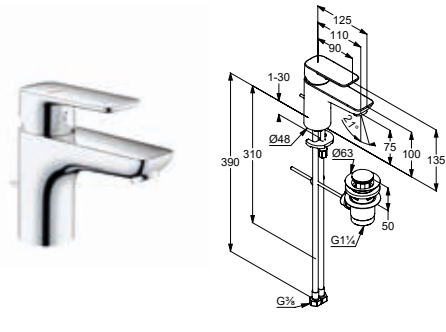

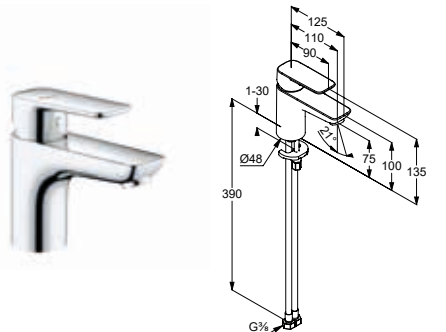


**KLUDI ZENTA
spacer escutcheon for base for KLUDI ZENTA**
for 38250, 38251, 38253, 38256, 38260, 38262,
38530, 38100, 38102, 38105, 38200, 38202,
38205

chrome

7607105-00

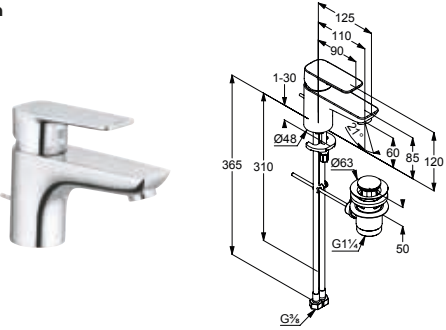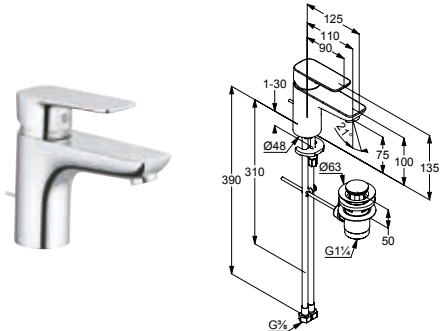

KLUDI PURE&STYLE

product	product description	surface	art. no.
<p>Basin</p> 	<p>KLUDI PURE&STYLE single lever basin mixer 60 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 60 mm</p>	chrome 	403850575
	<p>KLUDI PURE&STYLE single lever basin mixer 75 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm</p>	chrome matt black 	403820575 403823975
	<p>KLUDI PURE&STYLE single lever basin mixer 75 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm</p>	chrome matt black 	400280575 400283975
	<p>KLUDI PURE&STYLE single lever basin mixer 75 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm</p>	chrome matt black  	403880575WR4 403883975 <div style="background-color: black; color: white; padding: 2px; display: inline-block;">NEW</div>
	<p>KLUDI PURE&STYLE single lever basin mixer 75 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm</p>	chrome matt black  	403890575WR4 403893975 <div style="background-color: black; color: white; padding: 2px; display: inline-block;">NEW</div>




KLUDI PURE&STYLE

product

product description

surface

art. no.

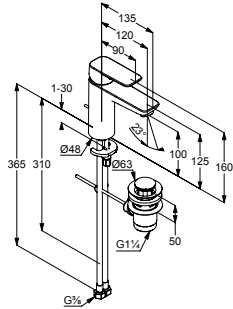


KLUDI PURE&STYLE
single lever basin mixer 100 DN 15
 single hole mounted
 solid lever
 ceramic cartridge with hot water limitation
 flow regulator M 24 x 1
 flow rate 5 l/min at 3 bar
 metal pop-up waste G 1 1/4
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 100 mm

chrome
 matt black



402900575
402903975

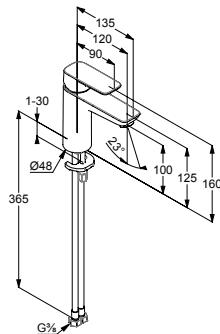


KLUDI PURE&STYLE
single lever basin mixer 100 DN 15
 single hole mounted
 solid lever
 ceramic cartridge with hot water limitation
 flow regulator M 24 x 1
 flow rate 5 l/min at 3 bar
 without pop-up waste
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 100 mm

chrome
 matt black



402920575
402923975

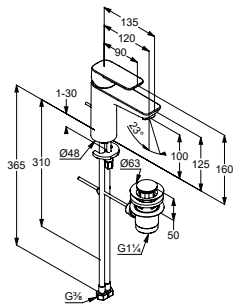


KLUDI PURE&STYLE
single lever basin mixer 100 DN 15
 single hole mounted
 solid lever
 EcoPlus centre position cold water
 ceramic cartridge with hot water limitation
 flow regulator M 24 x 1
 flow rate 3,8 l/min at 3 bar
 metal pop-up waste G 1 1/4
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 100 mm

chrome
 matt black



402930575WR4
402933975

NEW

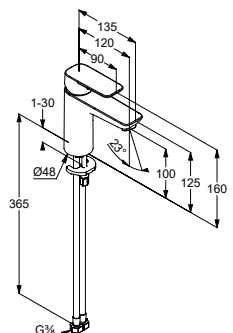


KLUDI PURE&STYLE
single lever basin mixer 100 DN 15
 single hole mounted
 solid lever
 EcoPlus centre position cold water
 ceramic cartridge with hot water limitation
 flow regulator M 24 x 1
 flow rate 3,8 l/min at 3 bar
 without pop-up waste
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 100 mm

chrome
 matt black



401980575WR4
401983975

NEW

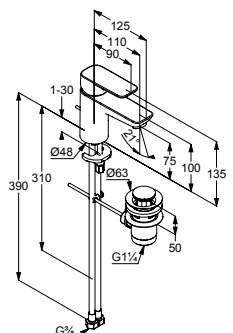

KLUDI PURE&STYLE
single lever basin mixer 75 DN 15
 single hole mounted
 solid lever
 ceramic cartridge with hot water limitation
 flow regulator M 24 x 1
 flow rate 3,8 l/min at 3 bar
 metal pop-up waste G 1 1/4
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 75 mm


















chrome



403820575WR5















KLUDI PURE&STYLE

product	product description	surface	art. no.
		<p>KLUDI PURE&STYLE single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	<p>chrome </p> <p>402900575WR5</p>
		<p>KLUDI PURE&STYLE single lever washbowl mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 215 mm</p>	<p>chrome matt black  </p> <p>402960575 402963975</p>
		<p>KLUDI PURE&STYLE single lever washbowl mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 215 mm</p>	<p>chrome  </p> <p>402960575WR5</p>
		<p>KLUDI PURE&STYLE single lever basin mixer DN 15 single hole mounted solid lever ceramic cartridge PCA aerator M 16,5 x 1 flow rate 5 l/min. at 3 bar swivelling spout without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 220 mm</p>	<p>chrome matt black </p> <p>400240575 400243975</p>
		<p>KLUDI PURE&STYLE single lever basin mixer DN 15 single hole mounted solid lever ceramic cartridge PCA aerator M 16,5 x 1 flow rate 5 l/min. at 3 bar swivelling spout metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 220 mm</p>	<p>chrome </p> <p>400250575</p>





KLUDI PURE&STYLE

product		product description	surface	art. no.	
Bidet			KLUDI PURE&STYLE single lever bidet mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 6 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 65 mm	chrome  	402160575
Bath			KLUDI PURE&STYLE single lever bath- and shower mixer DN 15 wall fastening solid lever flow class C/B flow regulator M 24 x 1 ceramic cartridge with hot water limitation autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow s-connections	chrome matt black	406810575 406813975
			KLUDI PURE&STYLE concealed single lever bath and shower mixer concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow rate 29 l/min at 3 bar autom. diverter shower/bathtub with PUSH & SWITCH Button required accessories: KLUDI FLEXX.BOX concealed body DN 20	chrome matt black	406590575 406593975 88011
			KLUDI PURE&STYLE concealed single lever bath and shower mixer concealed trim-set solid lever autom. diverter shower/bathtub for pre-installation mixer 38636 required accessories: concealed bath- and shower mixer DN 15 pre-installation set	chrome	404190575 38636
Shower			KLUDI PURE&STYLE single lever shower mixer DN 15 wall fastening solid lever ceramic cartridge with hot water limitation flow rate 28 l/min at 3 bar shower outlet G 1/2 protected against back flow s-connections	chrome matt black	408410575 408413975



KLUDI PURE&STYLE

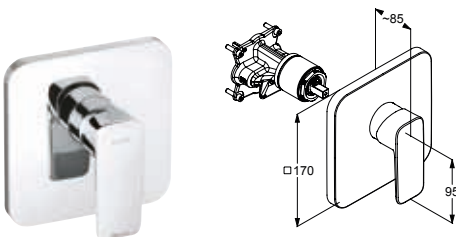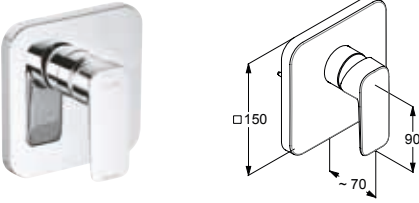product	product description	surface	art. no.
	<p>KLUDI PURE&STYLE concealed single lever shower mixer concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C</p> <p>required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	chrome matt black	406550575 406553975
	<p>KLUDI PURE&STYLE concealed single lever shower mixer concealed trim-set solid lever for pre-installation mixer 38828</p> <p>required accessories: concealed shower DN 15 pre-installation set</p>	chrome	404200575 38828





















KLUDI PURE&SOLID

product	product description	surface	art. no.
<p>Basin</p>	<p>KLUDI PURE&SOLID single lever basin mixer 60 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 60 mm</p>	<p>chrome</p>	<p>343850575</p>
	<p>KLUDI PURE&SOLID single lever basin mixer 75 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm</p>	<p>chrome</p>	<p>343820575</p>
	<p>KLUDI PURE&SOLID single lever basin mixer 75 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm</p>	<p>chrome</p>	<p>340280575</p>
	<p>KLUDI PURE&SOLID single lever basin mixer 75 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm</p>	<p>chrome</p>	<p>343820575WR5</p>
	<p>KLUDI PURE&SOLID single lever basin mixer 75 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm</p>	<p>chrome</p>	<p>343880575WR4</p> <p>NEW</p>



KLUDI PURE&SOLID

product	product description	surface	art. no.
		<p>KLUDI PURE&SOLID single lever basin mixer 75 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm</p>	<p>chrome   343890575WR4 NEW</p>
		<p>KLUDI PURE&SOLID single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	<p>chrome  342900575</p>
		<p>KLUDI PURE&SOLID single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	<p>chrome  342920575</p>
		<p>KLUDI PURE&SOLID single lever basin mixer 100 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	<p>chrome   342930575WR4 NEW</p>
		<p>KLUDI PURE&SOLID single lever basin mixer 100 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	<p>chrome   341980575WR4 NEW</p>




KLUDI PURE&SOLID

product

product description

surface


art. no.

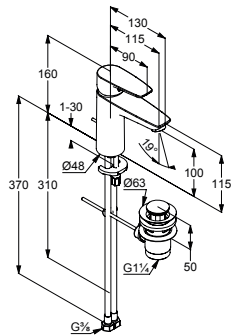

KLUDI PURE&SOLID
single lever basin mixer 100 DN 15
 single hole mounted
 solid lever
 ceramic cartridge with hot water limitation
 flow regulator M 24 x 1
 flow rate 3,8 l/min at 3 bar
 metal pop-up waste G 1 1/4
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 100 mm

chrome


342900575WR5

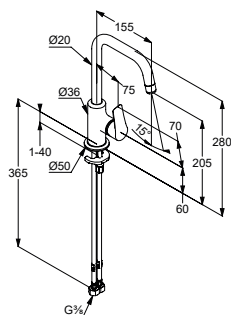

KLUDI PURE&SOLID
single lever basin mixer DN 15
 single hole mounted
 solid lever
 ceramic cartridge
 PCA aerator M 18 x 1
 flow rate 5 l/min. at 3 bar
 swivelling spout
 without pop-up waste
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 205 mm

chrome


340240575

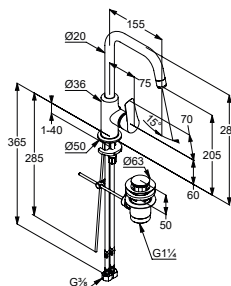

KLUDI PURE&SOLID
single lever basin mixer DN 15
 single hole mounted
 solid lever
 ceramic cartridge
 PCA aerator M 18 x 1
 flow rate 5 l/min. at 3 bar
 swivelling spout
 metal pop-up waste G 1 1/4
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 205 mm

chrome

340250575

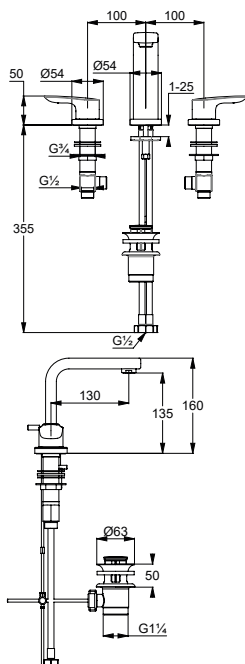

KLUDI PURE&SOLID
basin mixer DN 15
 rotating handle
 three hole assembling
 flow rate 5 l/min. at 3 bar
 flow regulator M 24 x 1
 fixed spout
 ceramic headpart 90°
 metal pop-up waste G 1 1/4
 flexible hoses G 3/8
 rapid installation set
 spout height lower edge 135 mm

chrome








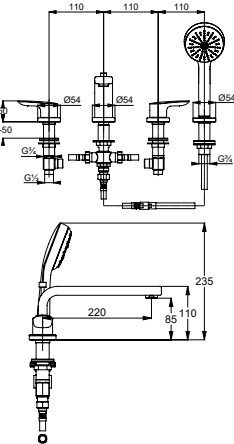


343940575



Bathroom





KLUDI PURE&SOLID

product	product description	surface	art. no.
<p>Bidet</p> 		<p>KLUDI PURE&SOLID single lever bidet mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 6 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 65 mm</p>	<p>chrome</p> <p>342160575</p>  
<p>Bath</p> 		<p>KLUDI PURE&SOLID single lever bath- and shower mixer DN 15 wall fastening solid lever flow class C/B flow regulator M 24 x 1 ceramic cartridge with hot water limitation autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow s-connections</p>	<p>chrome</p> <p>346810575</p>
		<p>KLUDI PURE&SOLID bath- and shower mixer DN 15 stand assembly four hole tiles deck mounted installation solid handles flow rate bath 27 l/min at 3 bar, flow rate handshower 13,5 l/min bei 3 bar cascade aerator M 24 x 1 ceramic headpart 90° autom. diverter shower/bathtub protected against back flow retractable hand shower flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm projection 220 mm</p>	<p>chrome</p> <p>344230575</p>
<p>required accessories: mounting plate pre-installation set for four hole mixer</p>	<p>KLUDI ROTEXA bath rim assembly kit</p>	<p>7614846-00</p> <p>chrome</p> <p>7878205-00</p>	
		<p>KLUDI PURE&SOLID concealed single lever bath and shower mixer concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow rate 29 l/min at 3 bar autom. diverter shower/bathtub with PUSH & SWITCH Button</p> <p>required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	<p>chrome</p> <p>346590575</p> <p>88011</p>








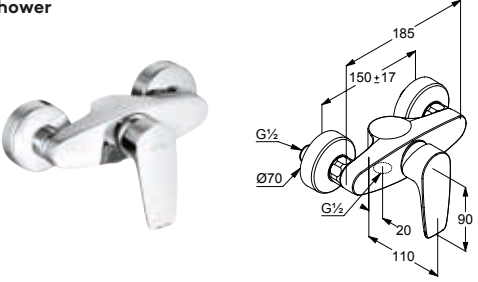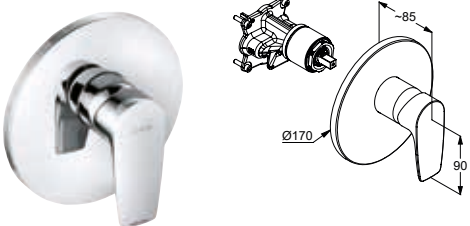









KLUDI PURE&SOLID

product	product description	surface	art. no.
<p data-bbox="97 358 175 392">Shower</p> 	<p data-bbox="606 358 893 414">KLUDI PURE&SOLID single lever shower mixer DN 15</p> <p data-bbox="606 414 1005 560">wall fastening solid lever ceramic cartridge with hot water limitation flow class B shower outlet G 1/2 protected against back flow s-connections</p>	chrome	348410575
	<p data-bbox="606 716 925 772">KLUDI PURE&SOLID concealed single lever shower mixer</p> <p data-bbox="606 772 1005 873">concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C</p> <p data-bbox="606 884 829 952">required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	chrome	346550575 88011



KLUDI PURE&EASY

product	product description	surface	art. no.
Basin	  <p>KLUDI PURE&EASY single lever basin mixer 60 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar plastic pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 60 mm</p>	chrome 	372850565
	  <p>KLUDI PURE&EASY single lever basin mixer 60 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 60 mm</p>	chrome 	373850565
	  <p>KLUDI PURE&EASY single lever basin mixer 60 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 60 mm</p>	chrome 	373870565
	  <p>KLUDI PURE&EASY single lever basin mixer 70 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar plastic pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 70 mm</p>	chrome 	372820565
	  <p>KLUDI PURE&EASY single lever basin mixer 70 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 70 mm</p>	chrome white/chrome 	373820565 373829165



KLUDI PURE&EASY

product	product description	surface	art. no.
	<p>KLUDI PURE&EASY single lever basin mixer 70 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 70 mm</p>	chrome white/chrome 	370280565 370289165
	<p>KLUDI PURE&EASY single lever basin mixer 70 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 70 mm</p>	chrome 	373820565WR5
	<p>KLUDI PURE&EASY single lever basin mixer 70 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar plastic pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 70 mm</p>	chrome 	372820565R
	<p>KLUDI PURE&EASY single lever basin mixer 70 DN 15 single hole mounted solid lever EcoPlus centre position cold water flow rate 5 l/min. at 3 bar flow regulator M 24 x 1 metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 70 mm</p>	chrome 	372890565
	<p>KLUDI PURE&EASY single lever basin mixer 70 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation PCA aerator M 24 x 1 flow rate 3,8 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 70 mm</p>	chrome 	373880565WR4 <div style="background-color: black; color: white; padding: 2px; display: inline-block;">NEW</div>



KLUDI PURE&EASY

product	product description	surface	art. no.
	<p>KLUDI PURE&EASY single lever basin mixer 70 DN 15 single hole mounted solid lever EcoPlus centre position cold water ceramic cartridge with hot water limitation PCA aerator M 24 x 1 flow rate 3,8 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 70 mm</p>	chrome 	373890565WR4 <div style="background-color: black; color: white; padding: 2px; display: inline-block;">NEW</div>
	<p>KLUDI PURE&EASY CARE single lever basin mixer 70 DN 15 single hole mounted public lever arm 120 mm ceramic cartridge with hot water limitation flow rate 5 l/min. at 3 bar flow regulator M 24 x 1 metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 70 mm</p>	chrome 	372840565
	<p>KLUDI PURE&EASY CARE single lever basin mixer 70 DN 15 single hole mounted clinic lever 180 mm ceramic cartridge with hot water limitation flow rate 5 l/min. at 3 bar flow regulator M 24 x 1 metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 70 mm</p>	chrome 	372870565
	<p>KLUDI PURE&EASY CARE single lever basin mixer 70 DN 15 single hole mounted clinic lever 180 mm ceramic cartridge with hot water limitation flow rate 3,8 l/min at 3 bar flow regulator M 24 x 1 metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 70 mm</p>	chrome 	372870565WR5
	<p>KLUDI PURE&EASY single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar plastic pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	chrome 	371900565




















KLUDI PURE&EASY

product	product description	surface	art. no.
	<p>KLUDI PURE&EASY single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	chrome white/chrome 	372900565 372909165
	<p>KLUDI PURE&EASY single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min. at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	chrome white/chrome 	372920565 372929165
	<p>KLUDI PURE&EASY single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar plastic pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	chrome 	371900565WR5
	<p>KLUDI PURE&EASY single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 3,8 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm</p>	chrome 	372900565WR5
	<p>KLUDI PURE&EASY single lever basin mixer 100 DN 15 single hole mounted solid lever EcoPlus centre position cold water flow rate 3,8 l/min at 3 bar flow regulator M 24 x 1 metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 100 mm</p>	chrome 	372930565WR4 <div style="background-color: black; color: white; padding: 2px; display: inline-block;">NEW</div>







KLUDI PURE&EASY

product	product description	surface	art. no.	
		<p>KLUDI PURE&EASY single lever basin mixer 100 DN 15 single hole mounted solid lever EcoPlus centre position cold water flow rate 3,8 l/min at 3 bar flow regulator M 24 x 1 without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 100 mm</p>	<p>chrome   371980565WR4 <div style="background-color: black; color: white; padding: 2px; display: inline-block;">NEW</div></p>	
		<p>KLUDI PURE&EASY single lever basin mixer DN 15 single hole mounted solid lever ceramic cartridge PCA aerator M 18 x 1 flow rate 5 l/min. at 3 bar swivelling spout metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 205 mm</p>	<p>chrome  370230565</p>	
		<p>KLUDI PURE&EASY single lever basin mixer DN 15 single hole mounted solid lever ceramic cartridge PCA aerator M 18 x 1 flow rate 5 l/min. at 3 bar swivelling spout without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 205 mm</p>	<p>chrome  370240565</p>	
Bidet			<p>KLUDI PURE&EASY single lever bidet mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 6 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 65 mm</p>	<p>chrome white/chrome   375330565 375339165</p>
		<p>KLUDI PURE&EASY single lever bidet mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 3,8 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 65 mm</p>	<p>chrome   375330565R</p>	











KLUDI PURE&EASY

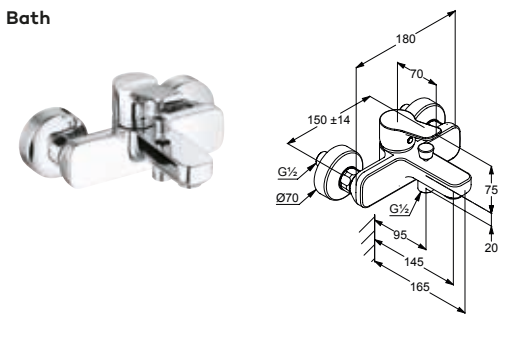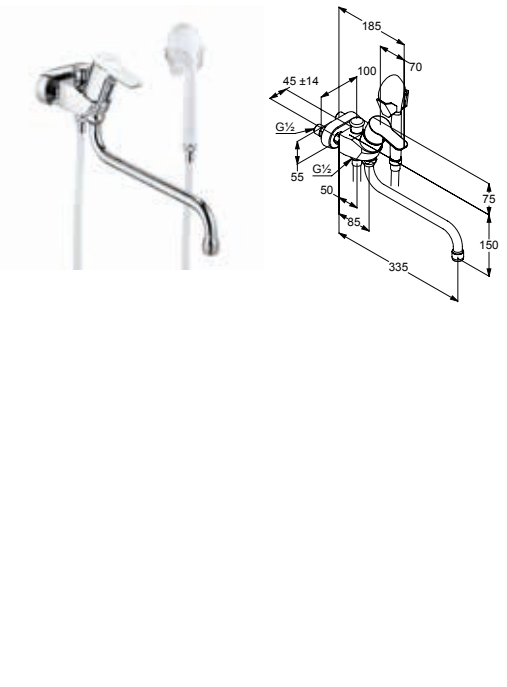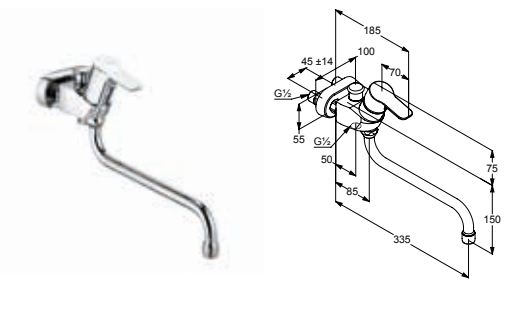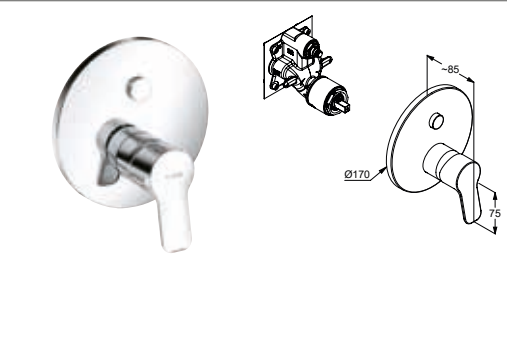product	product description	surface	art. no.
<p>Bath</p> 	<p>KLUDI PURE&EASY single lever bath- and shower mixer DN 15 wall fastening solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow class C/B autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow s-connections</p>	chrome white/chrome	376810565 376819165
	<p>KLUDI PURE&EASY single lever bath- and shower mixer DN 15 wall fastening solid lever distance from center to center 45 mm ceramic cartridge with hot water limitation swivelling spout 250 mm aerator M 24 x 1/B flow class B/A autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow s-connections tele-hand shower DN 15 white with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1250 mm Tele-wall holder transparent</p>	chrome	375920565
	<p>KLUDI PURE&EASY single lever bath- and shower mixer DN 15 wall fastening solid lever distance from center to center 45 mm ceramic cartridge with hot water limitation swivelling spout 250 mm aerator M 24 x 1/B flow class B/A autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow s-connections</p>	chrome	375910565
	<p>KLUDI PURE&EASY concealed single lever bath and shower mixer concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow rate 29 l/min at 3 bar autom. diverter shower/bathtub with PUSH & SWITCH Button</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome	376590565 88011







KLUDI PURE&EASY

product	product description	surface	art. no.
	 <p>KLUDI PURE&EASY concealed single lever bath and shower mixer concealed trim-set solid lever autom. diverter shower/bathtub for pre-installation mixer 38636</p> <p>required accessories: concealed bath- and shower mixer DN 15 pre-installation set</p>	chrome	374190565
Shower 	 <p>KLUDI PURE&EASY single lever shower mixer DN 15 wall fastening solid lever ceramic cartridge with hot water limitation flow class B shower outlet G 1/2 protected against back flow s-connections</p>	chrome white/chrome	378410565 378419165
	 <p>KLUDI PURE&EASY concealed single lever shower mixer concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome	376550565
	 <p>KLUDI PURE&EASY concealed single lever shower mixer concealed trim-set solid lever for pre-installation mixer 38828</p> <p>required accessories: concealed shower DN 15 pre-installation set</p>	chrome	374200565




KLUDI 1926

product	product description	surface	art. no.
	<p>KLUDI 1926 basin mixer DN 15 cross handles single hole mounted flow rate 5 l/min at 3 bar cascade aerator M 24 x 1 ceramic headpart 180° pop-up waste G 1 1/4 copper tubes 10 mm</p>	chrome gold plated 23 carat	510120520 510124520
	<p>KLUDI 1926 basin mixer DN 15 cross handles single hole mounted flow rate 5 l/min at 3 bar cascade aerator M 24 x 1 ceramic headpart 180° pop-up waste G 1 1/4 copper tubes 10 mm</p>	chrome gold plated 23 carat	510100520 510104520
	<p>KLUDI 1926 basin mixer DN 15 crystal handles "Made with Swarovski® Elements" single hole mounted flow rate 5 l/min at 3 bar cascade aerator M 24 x 1 ceramic headpart 180° pop-up waste G 1 1/4 copper tubes 10 mm</p>	chrome gold plated 23 carat	5101005G5 5101045G4
	<p>KLUDI 1926 basin mixer DN 15 cross handles three hole assembling flow rate 5 l/min at 3 bar cascade aerator M 24 x 1 ceramic headpart 180° flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm pop-up waste G 1 1/4 projection 140 mm</p>	chrome gold plated 2 3 carat	510460520 510464520



KLUDI 1926

product

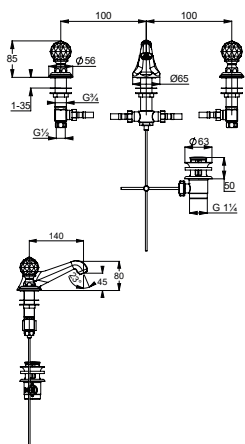

product description


**KLUDI 1926
basin mixer DN 15**
crystal handles
"Made with Swarovski® Elements"
three hole assembling
flow rate 12,2 l/min at 3 bar
cascade aerator M 24 x 1
ceramic headpart 180°
flexible high pressure supply hoses
G 1/2 x G 1/2 x 400 mm
pop-up waste G 1 1/4
projection 140 mm

surface

chrome
gold plated
23 carat

art. no.

5104605G5
5104645G4

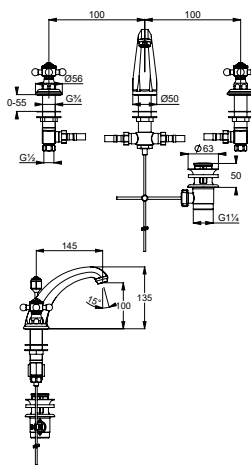

**KLUDI 1926
basin mixer DN 15**
cross handles
three hole assembling
flow rate 12,2 l/min at 3 bar
cascade aerator M 24 x 1
ceramic headpart 180°
flexible high pressure supply hoses
G 1/2 x G 1/2 x 400 mm
pop-up waste G 1 1/4
projection 145 mm

chrome
gold plated
23 carat

510430520
510434520




KLUDI 1926

product

product description

surface


art. no.

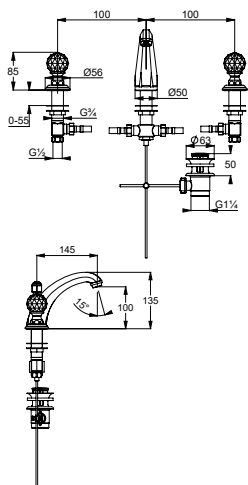

KLUDI 1926 basin mixer DN 15
 crystal handles
 "Made with Swarovski® Elements"
 three hole assembling
 flow rate 12,2 l/min at 3 bar
 cascade aerator M 24 x 1
 ceramic headpart 180°
 flexible high pressure supply hoses
 G 1/2 x G 1/2 x 400 mm
 pop-up waste G 1 1/4
 projection 145 mm

chrome
 gold plated
 23 carat

5104305G5
5104345G4

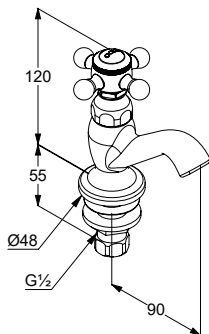


KLUDI 1926 pillar valve DN 15
 cross handle
 single hole mounted
 ceramic headpart 180°
 flow rate 15 l/min at 3 bar
 marking: COLD

chrome

510140520

Bidet

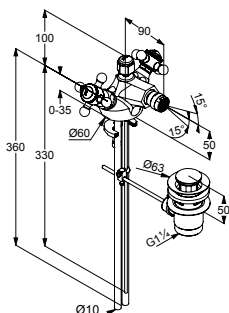


KLUDI 1926 bidet mixer DN 15
 cross handles
 single hole mounted
 flow rate 15 l/min at 3 bar
 ball joint-cascade-aerator M 24 x 1
 ceramic headpart 180°
 pop-up waste G 1 1/4
 copper tubes 10 mm

chrome
 gold plated
 23 carat

512110520
512114520

Bath

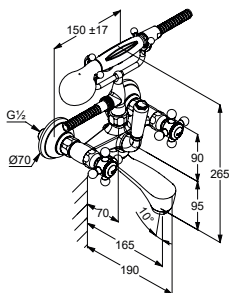

KLUDI 1926 bath- and shower mixer DN 15
 cross handles
 wall fastening
 flow class B/B
 cascade aerator M 28 x 1
 ceramic headpart 180°
 manual diverter shower/bathtub
 s-connections G 1/2 x G 3/4
 with shower set

chrome
 gold plated
 23 carat

514410520
514414520

Bathroom




KLUDI 1926

product

product description

surface

art. no.

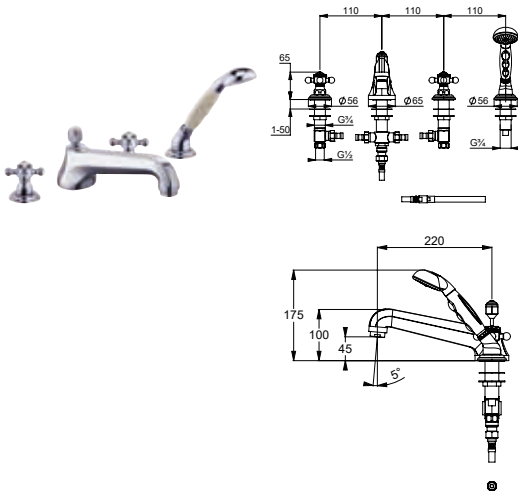

KLUDI 1926 bath- and shower mixer DN 15
 stand assembly
 four hole tiles deck mounted installation
 cross handles
 flow class B/B
 cascade aerator M 28 x 1
 ceramic headpart 180°
 autom. diverter shower/bathtub
 retractable hand shower
 high pressure supply hose
 G 1/2 x G 1/2 x 400 mm
 protected against back flow

required accessories:
 mounting plate
 pre-installation set for four hole mixer

KLUDI ROTEXA
 bath rim assembly kit


chrome
 gold plated 23
 carat

515250520
515254520

7614846-00

chrome

7878205-00

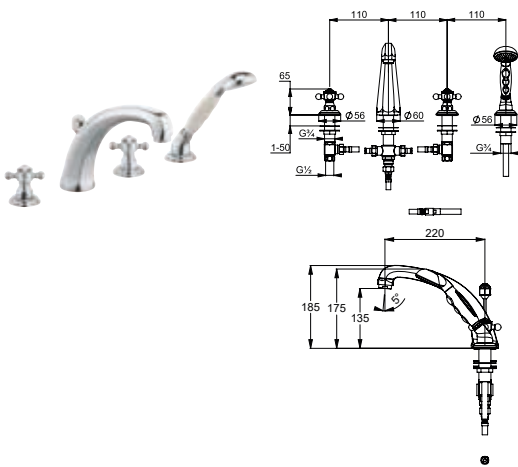

KLUDI 1926 bath- and shower mixer DN 15
 stand assembly
 four hole tiles deck mounted installation
 cross handles
 flow class B/B
 cascade aerator M 28 x 1
 ceramic headpart 180°
 autom. diverter shower/bathtub
 retractable hand shower
 shower hose G 1/2 x G 1/2 x 1500 mm
 flexible high pressure supply hoses
 G 1/2 x G 1/2 x 400 mm
 protected against back flow

required accessories:
 mounting plate
 pre-installation set for four hole mixer

KLUDI ROTEXA
 bath rim assembly kit

chrome
 gold plated
 23 carat

515240520
515244520





7614846-00

chrome

7878205-00











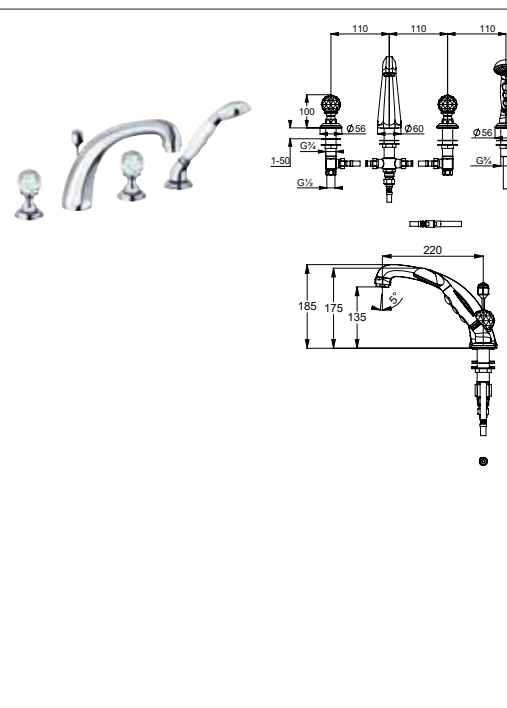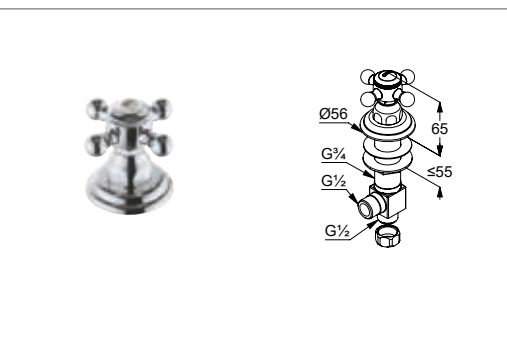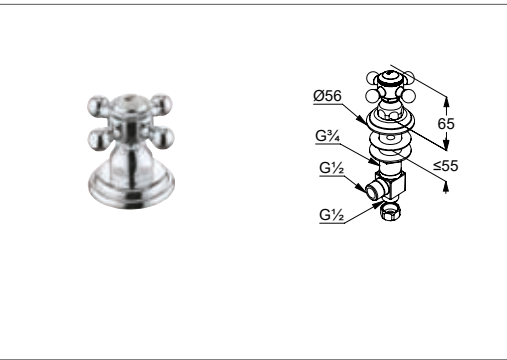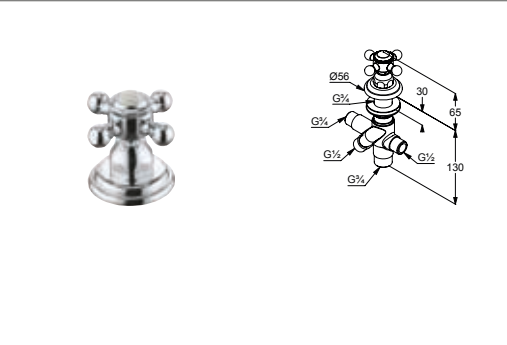



KLUDI 1926

product	product description	surface	art. no.
	<p>KLUDI 1926 bath- and shower mixer DN 15 stand assembly four hole tiles deck mounted installation crystal handles "Made with Swarovski® Elements" flow class B/B cascade aerator M 28 x 1 ceramic headpart 180° autom. diverter shower/bathtub retractable hand shower shower hose G 1/2 x G 1/2 x 1500 mm flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm protected against back flow</p> <p>required accessories: mounting plate pre-installation set for four hole mixer</p> <p>KLUDI ROTEXA bath rim assembly kit</p>	<p>chrome gold plated 23 carat</p>	<p>5152405G5 5152445G4</p> <p>7614846-00</p> <p>7878205-00</p>
	<p>KLUDI 1926 angle valve DN 15 cross handle stand assembly ceramic headpart 180° flow class B marking: COLD</p>	<p>chrome gold plated 23 carat</p>	<p>518170520 518174520</p>
	<p>KLUDI 1926 angle valve DN 15 cross handle stand assembly ceramic headpart 180° flow class B marking: HOT</p>	<p>chrome gold plated 23 carat</p>	<p>518180520 518184520</p>
	<p>KLUDI 1926 two-way diverter DN 15 cross handle stand assembly head part 360° flow class C/B marking: neutral tub spout G 3/4 shower outlet G 1/2 2 connections G 1/2</p>	<p>chrome gold plated 23 carat</p>	<p>518480520 518484520</p>



KLUDI 1926

product	product description	surface	art. no.
	 <p> $G\frac{3}{4}$ $\varnothing 85$ 165 </p>	<p>KLUDI 1926 bath filler DN 20 wall fastening flow class B cascade aerator M 28 x 1 separate DN 20 connector for pre-installation</p>	<p>chrome 5140705</p>
<p>Shower</p> 	 <p> $G\frac{1}{2}$ $\varnothing 10$ $G\frac{1}{2}$ $G\frac{1}{2}$ 150 ± 17 135 85 </p>	<p>KLUDI 1926 shower mixer DN 15 cross handles wall fastening flow class B ceramic headpart 180° s-connections G 1/2 x G 3/4 shower outlet G 1/2</p>	<p>chrome gold plated 2 3 carat 516100520 516104520</p>
	 <p> $G\frac{1}{2}$ $\varnothing 10$ $G\frac{1}{2}$ $G\frac{1}{2}$ 150 ± 17 155 80 </p>	<p>KLUDI 1926 shower mixer DN 15 crystal handles "Made with Swarovski® Elements" wall fastening flow class B ceramic headpart 180° s-connections G 1/2 x G 3/4 shower outlet G 1/2</p>	<p>chrome gold plated 23 carat 5161005G5 5161045G4</p>
	 <p> $\varnothing 168$ 67-87 </p>	<p>KLUDI 1926 concealed thermostatic mixer concealed trim-set hot water safety device 40 °C without shut-off valve</p> <p>required accessories: Thermostat concealed thermostatic mixer DN 15</p>	<p>chrome gold plated 23 carat  517190520 517194520</p> <p>35158</p>
	 <p> $\varnothing 168$ 150 215 67-87 </p>	<p>KLUDI 1926 concealed thermostatic mixer concealed trim-set hot water safety device 40 °C with shut-off valve</p> <p>required accessories: Thermostat concealed thermostatic mixer DN 15</p>	<p>chrome gold plated 23 carat  517200520 517204520</p> <p>35156</p>




KLUDI 1926

product

product description

surface

art. no.

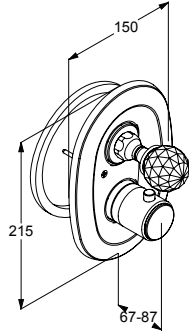

KLUDI 1926
concealed thermostatic mixer
 concealed trim-set
 crystal handle
 "Made with Swarovski® Elements"
 hot water safety device 40 °C
 with shut-off valve


chrome
 gold plated
 23 carat



5172005G5
5172045G4

required accessories:
 Thermostat
 concealed thermostatic mixer DN 15

35156



KLUDI 1926
concealed valve, trim set
 set 2 – trim set
 cross handle
 consisting of:
 handle, sleeve, rosette
 adjustable extension
 marking: COLD

chrome
 gold plated
 23 carat

518150520
518154520

required accessories:
 concealed valve DN 15
 connection G 1/2


29809

concealed valve DN 20
 connection G 3/4

29811

concealed valve DN 20
 soldered connection 22 mm

29911



KLUDI 1926
concealed valve, trim set
 set 2 – trim set
 cross handle
 consisting of:
 handle, sleeve, rosette
 adjustable extension
 marking: HOT

chrome
 gold plated
 23 carat

518160520
518164520

required accessories:
 concealed valve DN 15
 connection G 1/2

29809

concealed valve DN 20
 connection G 3/4

29811

concealed valve DN 20
 soldered connection 22 mm

29911























KLUDI 1926

product	product description	surface	art. no.	
	<p>KLUDI 1926 concealed valve, trim set set 2 – trim set cross handle consisting of: handle, sleeve, rosette adjustable extension marking: neutral</p> <p>required accessories: concealed valve DN 15 connection G 1/2</p> <p>concealed valve DN 20 connection G 3/4</p> <p>concealed valve DN 20 soldered connection 22 mm</p>	chrome gold plated 23 carat	518030520 518034520 29809 29811 29911	
	<p>KLUDI 1926 two-way diverter as a rotary valve 180 ° set 2 – trim set cross handle consisting of: handle, sleeve, rosette</p> <p>required accessories: two-way diverter DN 15 set 1 – pre-installation</p>	chrome gold plated 23 carat	518490520 518494520 neutral 2975900	
Accessories		<p>KLUDI 1926 angle valve DN 15 cross handle without marking flow rate 27 l/min at 3 bar with compression joint with push-on rosette</p>	chrome gold plated 23 carat	518430520 518434520
		<p>KLUDI copper tube 10 x 500 mm with doubled flanging for G 1/2 or G 3/8</p>	chrome gold plated 23 carat	1620305-00 1620345-00















KLUDI AMBA

product	product description	surface	art. no.
<p>Basin</p>  	<p>KLUDI AMBA single lever basin mixer 75 DN 15 solid lever single hole mounted flow rate 5 l/min. at 3 bar caché s-pointer-aerator M 24 x 1 ceramic cartridge Ø 28 mm pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 75 mm</p>	chrome  	530290575
 	<p>KLUDI AMBA single lever basin mixer 75 DN 15 solid lever single hole mounted flow rate 5 l/min. at 3 bar caché s-pointer-aerator M 24 x 1 ceramic cartridge Ø 28 mm without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 75 mm</p>	chrome  	530280575
 	<p>KLUDI AMBA single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge Ø 28 mm caché s-pointer-aerator M 24 x 1 flow rate 5 l/min. at 3 bar pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 100 mm</p>	chrome  	530230575
 	<p>KLUDI AMBA single lever basin mixer 100 DN 15 solid lever single hole mounted flow rate 5 l/min. at 3 bar caché s-pointer-aerator M 24 x 1 ceramic cartridge Ø 28 mm without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 100 mm</p>	chrome  	530260575
 	<p>KLUDI AMBA single lever basin mixer 100 DN 15 single hole mounted solid lever ceramic cartridge Ø 28 mm caché s-pointer-aerator M 24 x 1 flow rate 3,8 l/min at 3 bar pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 100 mm</p>	chrome  	530230575R



KLUDI AMBA

product	product description	surface	art. no.
		<p>KLUDI AMBA single lever washbowl mixer DN 15 single hole mounted solid lever ceramic cartridge Ø 28 mm caché s-pointer-aerator M 24 x 1 flow rate 4,3 l/min at 3 bar without pop-up waste rapid installation set flexible hoses G 3/8 spout height 275 mm</p>	<p>chrome</p> <p>532980575</p> 
		<p>KLUDI AMBA single lever washbowl mixer DN 15 single hole mounted solid lever ceramic cartridge Ø 28 mm caché s-pointer-aerator M 24 x 1 flow rate 3,8 l/min at 3 bar without pop-up waste rapid installation set flexible hoses G 3/8 spout height 275 mm</p>	<p>chrome</p> <p>532980575R</p> 
		<p>KLUDI AMBA single lever washbowl mixer DN 15 single hole mounted solid lever ceramic cartridge Ø 28 mm caché s-pointer-aerator M 24 x 1 flow rate 4,3 l/min at 3 bar without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 215 mm</p>	<p>chrome</p> <p>532960575</p> 
		<p>KLUDI AMBA concealed two hole wall mounted basin mixer trim set solid lever flow rate 4,3 l/min at 3 bar caché s-pointer-aerator M 24 x 1 projection wall spout 230 mm</p>	<p>chrome</p> <p>532450575</p> 
		<p>required accessories: installation set DN 15 for concealed two hole wall mounted basin mixer</p>	38243
		<p>installation set DN 15 for concealed two hole wall mounted basin mixer</p>	38242




KLUDI AMBA

product

product description

surface

art. no.

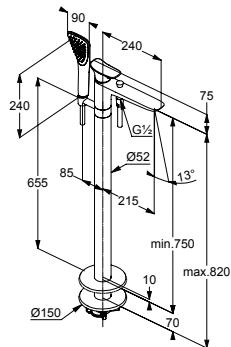

KLUDI AMBA
single lever bath- and shower mixer DN 15
 installation for free standing bathtub
 solid lever
 ceramic cartridge with hot water limitation
 flow class B/B
 caché s-pointer-Laminar-flow-regulator M 24 x 1
 autom. diverter shower/bathtub
 protected against back flow
 KLUDI SUPARAFLEX SILVER-hose anti twist
 G 1/2 x G 1/2 x 1250 mm
 with KLUDI FIZZ handshower 1S 6760005-00


required accessories:
 KLUDI FLEXX.BOX
 concealed unit DN 20

chrome

535900575



88088

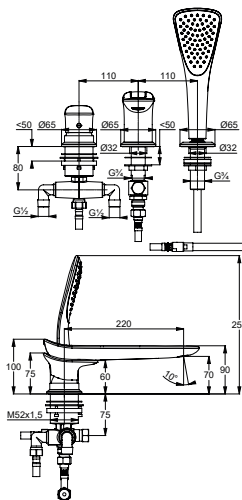

KLUDI AMBA
single lever bath- and shower mixer DN 15
 stand assembly
 solid lever
 three hole tiles deck mounted installation
 flow rate bath 28 l/min at 3 bar,
 flow rate handshower 13,5 l/min bei 3 bar
 caché s-pointer-Laminar-flow-regulator M 24 x 1
 ceramic cartridge with hot water limitation
 autom. diverter shower/bathtub
 protected against back flow
 projection 223 mm
 pull-out hand shower
 flexible high pressure supply hoses 500 mm

required accessories:
 mounting plate
 pre-installation set for three hole mixer

chrome

534470575





7614946-00

KLUDI ROTEXA
 bath rim assembly kit

chrome

7881205-00



KLUDI AMBA
concealed single lever bath and shower mixer
 concealed valve with functional unit
 solid lever
 wall fastening
 autom. diverter shower/bathtub
 ceramic cartridge with hot water limitation
 flow class D/C
 PA-IX 18967/IDC

required accessories:
 KLUDI FLEXX.BOX
 concealed body DN 20














chrome

536500575

88011













KLUDI AMBA

product	product description	surface	art. no.
  	<p>KLUDI AMBA concealed single lever bath and shower mixer trim set solid lever autom. diverter shower/bathtub</p> <p>required accessories: concealed mixer DN 15 pre-installation set</p>	chrome	535150575 33434
 	<p>KLUDI AMBA concealed thermostatic bath- and shower mixer concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve cylindrical handle, metal hot water safety device 38 °C flow class B</p> <p>required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	chrome 	538300575 88011
<p>Shower</p>  	<p>KLUDI AMBA single lever shower mixer DN 15 solid lever wall fastening flow class B ceramic cartridge with hot water limitation shower outlet G 1/2 protected against back flow covered eccentric-wall connections</p>	chrome	537100575
 	<p>KLUDI AMBA concealed single lever shower mixer concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C PA-IX 18967/IDC</p> <p>required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	chrome	536550575 88011
  	<p>KLUDI AMBA concealed single lever shower mixer trim set solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C</p> <p>required accessories: concealed mixer DN 15 pre-installation set</p>	chrome	537180575 33434













KLUDI AMBA

product	product description	surface	art. no.
Basin 	 <p>KLUDI AMBA glass holder wall fastening porcelain glass with mounting material</p>	chrome	5397505
	 <p>KLUDI AMBA liquid soap dispenser wall fastening porcelain container with mounting material</p>	chrome	5397605
	 <p>KLUDI AMBA soap dish wall fastening porcelain dish with mounting material</p>	chrome	5398505
	 <p>KLUDI AMBA hook wall fastening with mounting material</p>	chrome	5398405
	 <p>KLUDI AMBA towel holder two-armed, fixed wall fastening with mounting material</p>	chrome	5397705



KLUDI AMBA

product	product description	surface	art. no.
Bath 	 KLUDI AMBA bath towel holder L = 850 mm wall fastening with mounting material	chrome	5397905
	 KLUDI AMBA bath towel holder L = 650 mm wall fastening with mounting material	chrome	5398005
	 KLUDI AMBA bath handle L = 350 mm wall fastening with mounting material	chrome	5398105
WC 	 KLUDI AMBA toilet brush holder wall fastening porcelain container with mounting material	chrome	5397405
	 KLUDI AMBA paper-holder wall fastening with mounting material	chrome	5397105




KLUDI AMBA

product



product description



KLUDI AMBA
spare toilet paper holder
wall fastening
with mounting material
for one roll

surface

chrome

art. no.

5397205



KLUDI BINGO STAR


product

product description

surface

art. no.

Basin

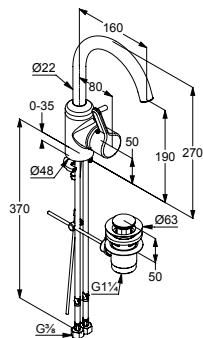

KLUDI BINGO STAR single lever basin mixer DN 15

solid lever
single hole mounted
flow rate 5 l/min at 3 bar
PCA caché-aerator M 16,5 x 1
ceramic cartridge with hot water limitation
swivelling spout (360°)
pop-up waste G 1 1/4
flexible hoses G 3/8
rapid installation set
P-IX 18635/IA
spout height lower edge 190 mm

chrome

420230578





KLUDI ZENTA

product	product description	surface	art. no.
<p>Basin</p>	<p>KLUDI ZENTA single lever basin mixer DN 15 solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 P-IX 18634/1A spout height lower edge 65 mm</p>	<p>chrome</p>	<p>382500575</p>
	<p>KLUDI ZENTA single lever basin mixer DN 15 solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 P-IX 18634/1A spout height lower edge 65 mm</p>	<p>chrome</p>	<p>382510575</p>
	<p>KLUDI ZENTA single lever basin mixer XL DN 15 solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 P-IX 18634/1A spout height lower edge 75 mm</p>	<p>chrome</p>	<p>382600575</p>
	<p>KLUDI ZENTA XL single lever basin mixer DN 15 solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 P-IX 18634/1A spout height lower edge 75 mm</p>	<p>chrome</p>	<p>382620575</p>
	<p>KLUDI ZENTA single lever basin mixer XXL DN 15 solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 120 mm</p>	<p>chrome</p>	<p>382640575</p>




















KLUDI ZENTA

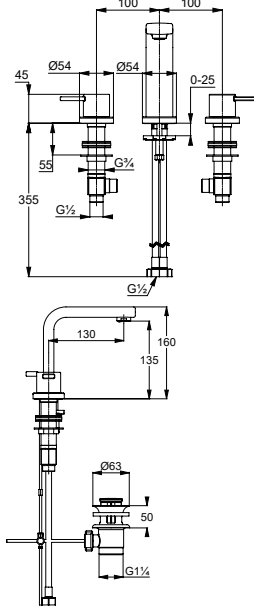product	product description	surface	art. no.
	<p>KLUDI ZENTA single lever basin mixer XXL DN 15 solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 120 mm</p>	chrome 	382650575
	<p>KLUDI ZENTA single lever basin mixer DN 15 solid lever single hole mounted flow rate 7 l/min at 3 bar PCA caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout rapid installation set metal pop-up waste G 1 1/4 flexible hoses G 3/8 noise level I spout height lower edge 235 mm</p>	chrome 	382940575
	<p>KLUDI ZENTA single lever basin mixer DN 15 solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 220 mm</p>	chrome 	420250575
	<p>KLUDI ZENTA single lever basin mixer DN 15 solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout rapid installation set flexible hoses G 3/8 spout height lower edge 220 mm</p>	chrome 	420260575
	<p>KLUDI ZENTA single lever basin mixer DN 15 solid lever single hole mounted flow rate 7 l/min at 3 bar PCA caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 P-IX 18635/IA spout height lower edge 190 mm</p>	chrome 	382550575







KLUDI ZENTA

product	product description	surface	art. no.
		<p>KLUDI ZENTA single lever washbowl mixer DN 15 solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 260 mm</p>	<p>chrome 382570575</p>   
		<p>KLUDI ZENTA basin mixer DN 15 solid lever three hole assembling flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 fixed spout ceramic headpart 90° rapid installation set flexible hoses G 3/8 noise level I spout height lower edge 135 mm</p>	<p>chrome 383930575</p>  
		<p>KLUDI ZENTA concealed two hole wall mounted basin mixer trim set solid lever flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 rosette diameter 70 mm projection wall spout 230 mm</p>	<p>chrome 382450575</p>  
		<p>KLUDI ZENTA concealed two hole wall mounted basin mixer trim set solid lever flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 rosette diameter 70 mm projection wall spout 180 mm</p>	<p>chrome 382440575</p>  
		<p>required accessories: installation set DN 15 for concealed two hole wall mounted basin mixer</p>	38243
		<p>required accessories: installation set DN 15 for concealed two hole wall mounted basin mixer</p>	38243









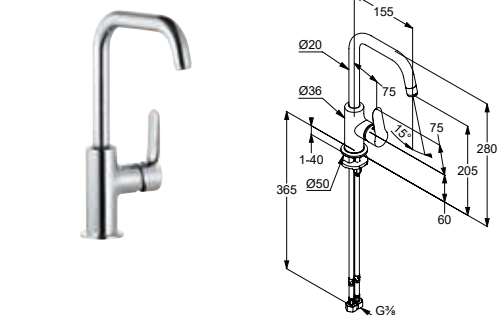



KLUDI ZENTA

product	product description	surface	art. no.
Shower 	 <p>KLUDI ZENTA single lever shower mixer DN 15 solid lever wall fastening flow rate 9 l/min at 3 bar s-connections ceramic cartridge with hot water limitation protected against back flow shower outlet G 1/2 PA-IX 18637/IA</p>	chrome	388700575
	 <p>KLUDI ZENTA concealed single lever shower mixer concealed valve with functional unit solid lever ceramic cartridge with hot water limitation flow class B PA-IX 18967/IDC</p> <p>required accessories: KLUDI FLEXX.BOX concealed body DN 20</p>	chrome	386550575 88011




KLUDI OBJEKTA

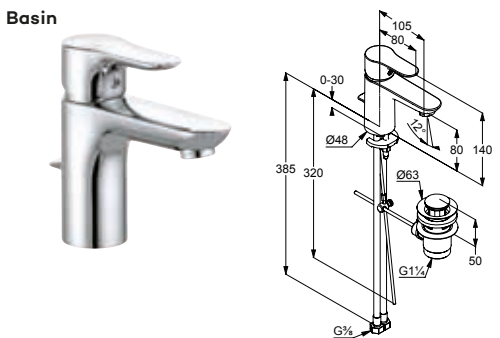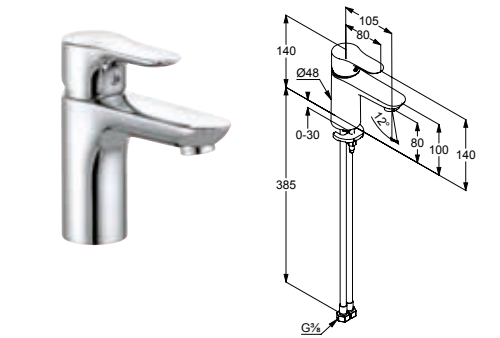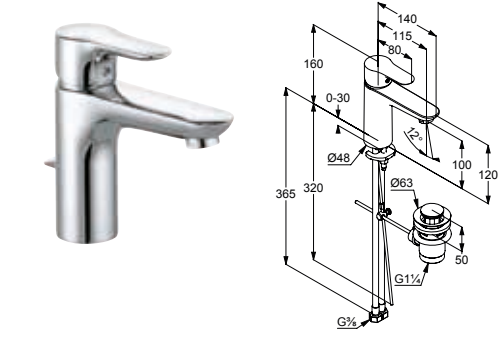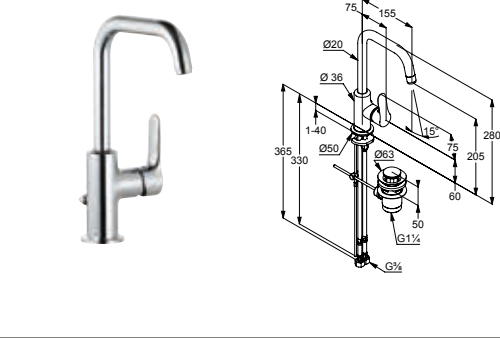product	product description	surface	art. no.
<p>Basin</p> 	<p>KLUDI OBJEKTA single lever basin mixer DN 15 solid lever single hole mounted ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 5 l/min at 3 bar pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 80 mm</p>	<p>chrome</p> 	<p>322330575</p>
	<p>KLUDI OBJEKTA single lever basin mixer DN 15 solid lever single hole mounted ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 5 l/min at 3 bar without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 80 mm</p>	<p>chrome</p> 	<p>321260575</p>
	<p>KLUDI OBJEKTA single lever basin mixer XL DN 15 solid lever single hole mounted ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 5 l/min at 3 bar flexible hoses G 3/8 rapid installation set pop-up waste G 1 1/4 spout height lower edge 100 mm</p>	<p>chrome</p> 	<p>322600575</p>
	<p>KLUDI OBJEKTA single lever basin mixer DN 15 solid lever single hole mounted flow rate 4,3 l/min at 3 bar flow regulator M 18 x 1 ceramic cartridge swivelling spout pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 noise level I spout height lower edge 205 mm</p>	<p>chrome</p> 	<p>320230575</p>
	<p>KLUDI OBJEKTA single lever basin mixer DN 15 solid lever single hole mounted flow rate 4,3 l/min at 3 bar flow regulator M 18 x 1 ceramic cartridge swivelling spout rapid installation set flexible hoses G 3/8 noise level I spout height lower edge 205 mm</p>	<p>chrome</p> 	<p>320240575</p>



KLUDI OBJEKTA


product	product description	surface	art. no.
---------	---------------------	---------	----------

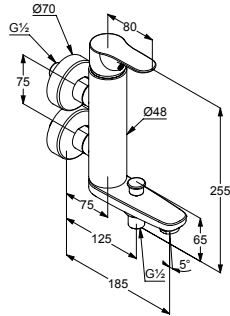

KLUDI OBJEKTA
single lever bath- and shower mixer DN 15
 vertical bath/ shower mixer
 solid lever
 wall fastening
 ceramic cartridge with hot water limitation
 aerator M 28 x 1
 flow class B/B
 autom. diverter shower/bathtub
 shower outlet G 1/2
 protected against back flow
 s-connections G 1/2 x G 3/4
 distance from center to center 75 mm

chrome

364890575



KLUDI OBJEKTA
concealed single lever bath and shower mixer
 concealed valve with functional unit
 solid lever
 wall fastening
 ceramic cartridge with hot water limitation
 flow class D/C
 autom. diverter shower/bathtub
 PA-IX 18967/IDC


required accessories:
 KLUDI FLEXX.BOX
 concealed body DN 20

chrome

326500575

88011


Shower

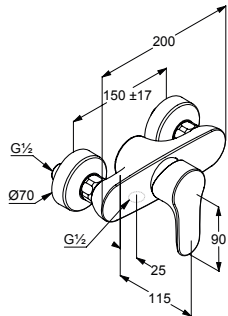

KLUDI OBJEKTA
single lever shower mixer DN 15
 solid lever
 wall fastening
 ceramic cartridge with hot water limitation
 flow class C
 shower outlet G 1/2
 protected against back flow
 s-connections G 1/2 x G 3/4

chrome

327640575

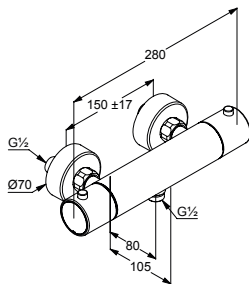

KLUDI OBJEKTA
thermostatic shower mixer DN 15
 wall fastening
 flow class B
 temperature control handle
 with hot water safety device 38° C
 With optional temperature limit stop at 43 ° C
 with shut-off valve
 50 % water consumption regulation
 flow rate 22 l/min at 3 bar
 protected against back flow
 shower outlet G 1/2
 s-connections G 1/2 x G 3/4
 dirt catcher sieves
 P-IX 8049/IB
 DIN-DVGW-BM-0037

chrome







352000538

Bathroom








KLUDI OBJEKTA

product	product description	surface	art. no.
 	<p>KLUDI OBJEKTA single lever shower mixer DN 15 vertical bath/ shower mixer solid lever wall fastening ceramic cartridge with hot water limitation flow class B shower outlet G 1/2 protected against back flow s-connections G 1/2 x G 3/4 distance from center to center 75 mm</p>	chrome	366510575
 	<p>KLUDI OBJEKTA concealed single lever shower mixer concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class C PA-IX 18967/IDC</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome	326550575 88011











KLUDI STANDARD

product	product description	surface	art. no.
Basin 	KLUDI STANDARD pillar valve DN 15 single hole mounted flow rate 12 l/min at 3 bar swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 marking: blue/red PA-IX 1247/IA handle 08 = handle Terralux metal handle 15 = handle Terralux plastic spout height lower edge 180 mm	chrome chrome	204070508 204070515
	KLUDI STANDARD pillar valve DN 15 single hole mounted flow rate 12 l/min at 3 bar casted spout aerator M 24 x 1 marking: blue/red P-IX 1116/IA handle 08 = handle Terralux metal handle 15 = handle Terralux plastic spout height lower edge 50 mm	chrome	200130508
Bath 	KLUDI STANDARD CARE wall fitting DN 15 wall fastening flow rate 8 l/min at 3 bar casted spout care-aerator M 24 x 1 s-connections PA-IX 8668/IZ handle 08 = handle Terralux metal	chrome	320040508
	KLUDI SPECIAL bath- and shower mixer DN 15 wall fastening flow class B/A swivelling spout 200 mm aerator M 22 x 1 autom. diverter shower/bathtub protected against back flow shower outlet G 3/4 handle 15 = handle Terralux plastic	chrome	251010515
	KLUDI SPECIAL bath- and shower mixer DN 15 wall fastening flow class B/A swivelling spout 250 mm aerator M 22 x 1 autom. diverter shower/bathtub protected against back flow shower outlet G 3/4 handle 15 = handle Terralux plastic	chrome	251110515



KLUDI STANDARD

product	product description	surface	art. no.
	 <p>KLUDI SPECIAL bath- and shower mixer DN 15 wall fastening distance from center to center 45 mm flow class B/A swivelling spout 250 mm aerator M 22 x 1 autom. diverter shower/bathtub protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 1/2 P-IX 4087/IIBA handle 15 = handle Terralux plastic</p>	chrome	254110515
	 <p>KLUDI SPECIAL bath- and shower mixer DN 15 wall fastening distance from center to center 45 mm flow class B/A swivelling spout 250 mm aerator M 22 x 1 autom. diverter shower/bathtub protected against back flow tele-hand shower DN 15 white with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1250 mm Tele-wall holder transparent s-connections G 1/2 x G 1/2 P-IX 4087/IIBA handle 15 = handle Terralux plastic</p>	chrome	254130515
	 <p>KLUDI STANDARD bath filler DN 20 with wall flange (escutcheon) aerator M 28 x 1 projection 150 mm noise level I</p>	chrome	1350205
Shower 	 <p>KLUDI STANDARD shower mixer DN 15 wall fastening flow class B s-connections shower outlet G 3/4 protected against back flow P-IX 8563/IB handle Ø8 = handle Terralux metal handle 15 = handle Terralux plastic</p>	chrome	262020508






KLUDI STANDARD

product	product description	surface	art. no.
	<p>KLUDI STANDARD shower mixer DN 15 wall fastening distance from center to center 120 mm flow class B s-connections shower outlet G 1/2 protected against back flow handle 08 = handle Terralux metal</p>	chrome	261010508
	<p>KLUDI STANDARD concealed valve, trim set set 2 – trim set existing of: handle, sleeve, flange adjustable extension marking: blue/red handle 08 = handle Terralux metal handle 15 = handle Terralux plastic</p> <p>required accessories: concealed valve DN 15 connection G 1/2 29209</p> <p>concealed valve DN 20 connection G 3/4 29211</p> <p>concealed valve DN 20 soldered connection 22 mm 29511</p>	chrome chrome	143030508 143030515
Accessories	<p>KLUDI pillar connections (per pair)</p>	chrome	7598205-00
Spare parts	<p>KLUDI STANDARD handle 08 handle Terralux metal marking: blue</p>	chrome	7542105-00



KLUDI STANDARD

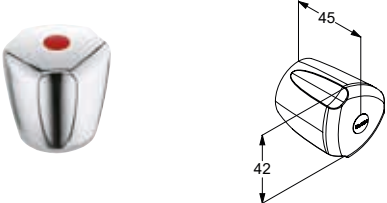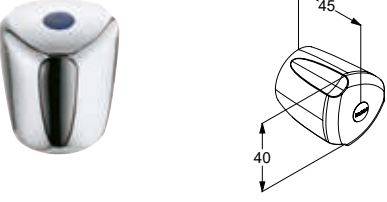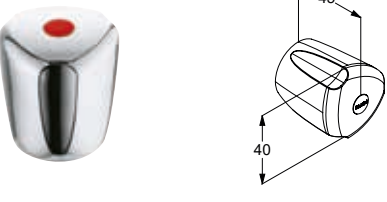product	product description	surface	art. no.
	KLUDI STANDARD handle 08 handle Terralux metal marking: red	chrome	7542205-00
	KLUDI STANDARD handle 15 handle Terralux plastic marking: blue	chrome	7636005-00
	KLUDI STANDARD handle 15 handle Terralux plastic marking: red	chrome	7636105-00








FLEXX.BOXX & Pre-installation sets



BATHROOM		FITTINGS		
Smart Luxury	NOVA FONTE	22	BOZZ	53
	BALANCE	35	ZENTA SL	61
	AMEO	44		
Pure Function	PURE&STYLE	80	PURE&EASY	90
	PURE&SOLID	85		
	1926	97	ZENTA	114
	AMBA	105	OBJEKTA	119
	BINGO STAR	113	STANDARD	123
FLEXX.BOXX & PRE-INSTALLATION SETS				
	FLEXX.BOXX	128	Pre-installation sets	130
THERMOSTAT				
	Thermostat surface-mounted	140	Thermostat concealed	142



FLEXX.BOX

product	product description	surface	art. no.
FLEXX.BOX 	KLUDI FLEXX.BOX concealed body DN 20 pre-installation set without trim set without functional unit in-wall installation with one-piece elastomere-coating with protection cap for skeleton with additional tight gasket with flushing set dezincification resistant brass P-IX 19310/ICB		88011
	concealed extension set for trim set suitable to KLUDI FLEXX.BOX 88011 L = 30 mm dezincification resistant brass DIN 50930-6	neutral	7300600-00
	adaptor for wrong installed function part for KLUDI FLEXX.BOX single lever variants (reserved cold and hot water supply) dezincification resistant brass for KLUDI FLEXX.BOX 88011	neutral	7458000-00
	adaptor for wrong installed function part for KLUDI FLEXX.BOX THM variants (reserved cold and hot water supply) dezincification resistant brass for KLUDI FLEXX.BOX 88011 for trim set till 02/2018	neutral	7400100-00
	adaptor for wrong installed function part for KLUDI FLEXX.BOX THM variants (reserved cold and hot water supply) dezincification resistant brass for KLUDI FLEXX.BOX 88011 for trim set from 03/2018	neutral	7653900-00








FLEXX.BOXX

product	product description	surface	art. no.
	<p>KLUDI FLEXX.BOXX concealed unit DN 20 for freestanding bath- and shower mixer for floor mounting with one-piece elastomere-coating dezincification resistant brass with protection cap for skeleton with self-sealing sleeve with flushing set without stand fitting without extension set</p>		88088
<p>Pre-installation sets</p> 	<p>KLUDI angle valve DN 15 G 1/2 x G 1/2 cylindrical handle wall fastening flow class B ceramic headpart 90° without marking rosette diameter Ø 50 mm</p>	chrome	1584305-00
	<p>KLUDI angle valve DN 15 G 1/2 x G 1/2 cylindrical handle wall fastening flow class B Classical lift-cone headpart G 1/2 without marking rosette diameter Ø 50 mm</p>	chrome	1584405-00
	<p>angle valve DN 15 G 1/2 x G 3/8 x Ø 10 mm cylindrical handle wall fastening flow class B ceramic headpart 90° without marking rosette diameter Ø 50 mm</p>	chrome	1584505-00
	<p>angle valve DN 15 G 1/2 x G 3/8 x Ø 10 mm cylindrical handle wall fastening flow class D Classical lift-cone headpart G 1/2 without marking rosette diameter Ø 50 mm</p>	chrome	1584605-00



PRE-INSTALLATION SETS

product	product description	surface	art. no.
	<p>installation set DN 15 for concealed two hole wall mounted basin mixer for concealed installation flow rate 16 l/min at 3 bar ceramic cartridge K-36 with hot water limitation pre-installation plug G 1/2 mounting-depth-compensation 30 mm connection G 1/2 without trim set noise level I</p>		38242
	<p>installation set DN 15 for concealed two hole wall mounted basin mixer for concealed installation flow rate 16 l/min at 3 bar ceramic cartridge K-35 with hot water limitation pre-installation plug G 1/2 mounting-depth-compensation 30 mm connection G 1/2 without trim set noise level I</p>		38243
	<p>concealed mixer DN 15 pre-installation set without trim set in-wall installation flow class B/B ceramic cartridge with hot water limitation with self-sealing sleeve for concealed dry-installation P-IX 9734/IBB</p>		33434
	<p>extension for concealed body 33434 30 mm length</p>	chrome	7423305-00
	<p>concealed assembly set for pre-wall installation for concealed body 33434, 35424, 33424</p>	neutral	7642400-00













PRE-INSTALLATION SETS

product	product description	surface	art. no.
		<p>concealed bath- and shower mixer DN 15 pre-installation set without trim set in-wall installation flow rate 24 l/min at 3 bar ceramic cartridge with hot water limitation</p>	38636
		<p>concealed bath- and shower mixer DN 15 pre-installation set without trim set in-wall installation flow class B/B ceramic cartridge with hot water limitation PA-IX 8281/IBB</p>	38624N
		<p>concealed shower DN 15 pre-installation set without trim set in-wall installation flow class B ceramic cartridge with hot water limitation</p>	38828 38828Z
		<p>extension for concealed bath and shower mixer 38624, 38625 30 mm length</p>	chrome 7598005-00
		<p>extension for concealed shower mixer 38826, 38625, 38243 for pre-installation set 38243 30 mm length</p>	chrome 7598105-00



PRE-INSTALLATION SETS

product	product description	surface	art. no.
		neutral	7357500-00
		neutral	7666100-00
			35156
		chrome	7573105-00
			35158













PRE-INSTALLATION SETS

product	product description	surface	art. no.
	<p>extension for concealed thermostatic mixer without shut-off valve 35158 30 mm length</p>	chrome	7573005-00
	<p>extension for concealed thermostatic mixer without shut-off valve 35093 30 mm length</p>	chrome	7572705-00
	<p>three-way diverter DN 15 set 1 – pre-installation in-wall installation diverter 1 connection G 3/4 3 spouts G 1/2</p>		29757
	<p>two-way diverter DN 15 set 1 – pre-installation in-wall installation diverter 1 connection G 1/2 2 spouts G 1/2</p>		29747
	<p>two-way diverter DN 15 set 1 – pre-installation in-wall installation diverter as a rotary valve 180 ° 2 connections G 1/2 tub spout G 3/4 shower outlet G 1/2</p>	neutral	2975900



PRE-INSTALLATION SETS

product	product description	surface	art. no.
	 <p>concealed valve DN 15 connection G 1/2 set 1 – pre-installation classic headpart sleeve PA-IX 9923/I</p>		29209
	 <p>concealed valve DN 20 connection G 3/4 set 1 – pre-installation classic headpart sleeve PA-IX 2427/I</p>		29211
	 <p>concealed valve DN 15 connection G 1/2 set 1 – pre-installation ceramic headpart sleeve noise level I</p>		29809
	 <p>concealed valve DN 20 connection G 3/4 set 1 – pre-installation ceramic headpart sleeve noise level I</p>		29811
	 <p>concealed valve DN 20 connection G 3/4 set 1 – pre-installation ceramic headpart 90° sleeve</p>		53811



PRE-INSTALLATION SETS

product	product description	surface	art. no.
	<p>concealed valve DN 20 soldered connection 22 mm set 1 – pre-installation classic headpart sleeve PA-IX 2427/1</p>		29511
	<p>concealed valve DN 20 soldered connection 22 mm set 1 – pre-installation ceramic headpart sleeve</p>		29911
	<p>extension for concealed valve G 1/2 - G 1 1/4 40 mm length</p>	chrome	7507905-00
	<p>KLUDI ROTEXA MULTI bath rim assembly kit pre-installation set and trim set for 4-hole fittings to be covered by tiles or with visible mounting plate with 2 pressure hoses G 1/2 x G 1/2 x 400 mm for angle valve connection with leak water container incl. back flow preventer with connecting hose incl. hose clamps bath filling, waste and overflow set G 1 1/2 with dripping water adapter without screw-kit 76156.-00 without visible mounting plate art. no 16021.</p>	chrome	7879405-00
	<p>KLUDI ROTEXA bath rim assembly kit pre-installation set and trim set for 4-hole fittings to be covered by tiles or with visible mounting plate with 2 pressure hoses G 1/2 x G 1/2 x 400 mm for angle valve connection with leak water container incl. back flow preventer with connecting hose incl. hose clamps pop-up and overflow set G 1 1/2 with dripping water adapter without screw-kit 76156.-00 without visible mounting plate art. no 16021.</p>	chrome	7878205-00



PRE-INSTALLATION SETS

product	product description	surface	art. no.
	<p>KLUDI ROTEXA MULTI bath rim assembly kit pre-installation set and trim set for 3-hole fittings to be covered by tiles or with visible mounting plate with 2 pressure hoses G 1/2 x G 1/2 x 400 mm for angle valve connection with leak water container incl. back flow preventer with connecting hose incl. hose clamps bath filling, waste and overflow set G 1 1/2 with dripping water adapter without screw-kit 76156.-00 without visible mounting plate art. no 1602405</p>	chrome	7880205-00
	<p>KLUDI ROTEXA bath rim assembly kit pre-installation set and trim set for 3-hole fittings to be covered by tiles or with visible mounting plate with 2 pressure hoses G 1/2 x G 1/2 x 400 mm for angle valve connection with leak water container incl. back flow preventer with connecting hose incl. hose clamps pop-up and overflow set G 1 1/2 with dripping water adapter without screw-kit 76156.-00 without visible mounting plate art. no 1602405</p>	chrome	7881205-00
	<p>mounting plate pre-installation set for four hole mixer with frame anchor to be covered by tiles with 2 pressure hoses G 1/2 x G 1/2 x 400 mm for angle valve connection without screw-kit 76156.-00</p>		7614846-00
	<p>visible mounting plate for combination with mounting plate 76148 and assembly package 74662, 74794</p>	chrome gold plated 23 carat	1602105 1602145
	<p>mounting plate pre-installation set for three hole mixer with frame anchor to be covered by tiles with 2 pressure hoses G 1/2 x G 1/2 x 400 mm for angle valve connection without screw-kit 76156.-00</p>		7614946-00




PRE-INSTALLATION SETS

product

product description

surface


art. no.

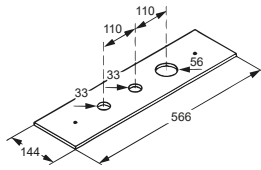

visible mounting plate
for combination with mounting plate 76149
and assembly package 74802, 75802

chrome

1602405

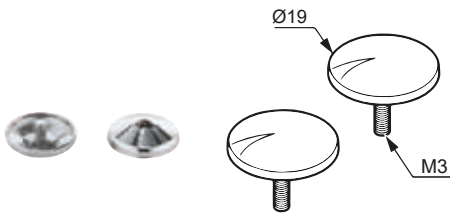

screw set
trim set

for mounting plate 76148, 76149
and assembly package 74662, 74802, 75802, 74794

chrome

7615605-00




















Thermostat



BATHROOM	FITTINGS			
Smart Luxury	NOVA FONTE	22	BOZZ	53
	BALANCE	35	ZENTA SL	61
	AMEO	44		
Pure Function	PURE&STYLE	80	PURE&EASY	90
	PURE&SOLID	85		
	1926	97	ZENTA	114
	AMBA	105	OBJEKTA	119
	BINGO STAR	113	STANDARD	123
	FLEXX.BOX & PRE-INSTALLATION SETS			
	FLEXX.BOX	128	Pre-installation sets	130
	THERMOSTAT			
	Thermostat surface-mounted	140	Thermostat concealed	142



THERMOSTAT SURFACE-MOUNTED

product	product description	surface	art. no.
Thermostat surface-mounted  	KLUDI BOZZ thermostatic shower mixer DN 15 wall fastening temperature control handle with hot water safety device 38° C With optional temperature limit stop at 43 ° C with shut-off valve flow rate 22 l/min at 3 bar protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4 dirt catcher sieves P-IX 8049/1B	chrome matt black 	352030538 352033938
 	KLUDI ZENTA SL thermostatic bath- and shower mixer DN 15 wall fastening aerator M 24 x 1/B temperature control handle with hot water safety device 38° C ceramic headpart 90° flow rate bath 25,2 l/min at 3 bar, flow rate 17 l/min at 3 bar autom. diverter shower/bathtub protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4 dirt catcher sieves	chrome matt black 	351010538 351013938
 	KLUDI ZENTA SL thermostatic shower mixer DN 15 wall fastening temperature control handle with hot water safety device 38° C with shut-off valve flow rate 25 l/min at 3 bar protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4 dirt catcher sieves PA-IX 18064/1B	chrome matt black 	351000538 351003938
 	KLUDI OBJEKTA thermostatic bath- and shower mixer DN 15 wall fastening temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 bath rotary valve to the rear Shower: Rotary valve forward flow regulator M 28 x 1 flow rate bath 23,8 l/min at 3 bar flow rate handshower 18,7 l/min bei 3 bar protected against back flow dirt catcher sieves s-connections	chrome 	352010538
 	KLUDI OBJEKTA thermostatic shower mixer DN 15 wall fastening flow class B temperature control handle with hot water safety device 38° C With optional temperature limit stop at 43 ° C with shut-off valve 50 % water consumption regulation flow rate 22 l/min at 3 bar protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4 dirt catcher sieves P-IX 8049/1B DIN-DVGW-BM-0037	chrome 	352000538




THERMOSTAT SURFACE-MOUNTED

product



product description

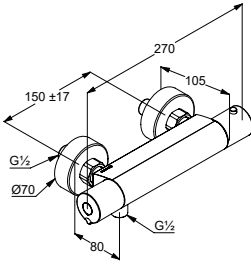

KLUDI BASIC
thermostatic shower mixer DN 15
wall fastening
temperature control handle
with hot water safety device 38° C
ceramic headpart 180°
flow rate 25 l/min at 3 bar
protected against back flow
shower outlet G 1/2
s-connections G 1/2 x G 3/4

surface

chrome



art. no.

350020538



THERMOSTAT CONCEALED

product	product description	surface	art. no.
Thermostat concealed 	 <p>KLUDI NOVA FONTE Puristic concealed thermostatic bath- and shower mixer concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve hot water safety device 40 °C flow class B P-IX 18444/IIIC</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome matt black matt white 	208300515 208303915 208305315 88011
	 <p>KLUDI NOVA FONTE Puristic concealed thermostatic shower mixer concealed valve with functional unit with ceramic shut-off valve hot water safety device 40 °C flow rate 20 l/min at 3 bar P-IX 18444/IIIC</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome matt black matt white 	208350515 208353915 208355315 88011
	 <p>KLUDI BALANCE concealed thermostatic bath- and shower mixer concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve cylindrical handle, metal hot water safety device 38 °C flow class B P-IX 18444/IIIC</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome matt black/chrome 	528300575 528308775 88011
	 <p>KLUDI BALANCE concealed thermostatic mixer DN 20 concealed valve with functional unit without shut-off valve cylindrical handle, metal hot water safety device 38 °C flow rate 40 l/min at 3 bar</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	527290575 88011
	 <p>KLUDI AMEO concealed thermostatic bath- and shower mixer concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve hot water safety device 38 °C</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	418300575 88011


















THERMOSTAT CONCEALED

product	product description	surface	art. no.
	<p>KLUDI AMEO concealed thermostatic shower mixer concealed valve with functional unit with ceramic shut-off valve hot water safety device 38 °C</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	418350575
	<p>KLUDI ZENTA SL concealed thermostatic bath- and shower mixer concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve hot water safety device 38 °C With optional temperature limit stop at 43 °C flow class B P-IX 18444/IIIC</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	388300545
	<p>KLUDI ZENTA SL concealed thermostatic shower mixer concealed valve with functional unit with ceramic shut-off valve hot water safety device 38 °C With optional temperature limit stop at 43 °C P-IX 18444/IIIC</p> <p>required accessories: KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	388350545
	<p>KLUDI 1926 concealed thermostatic mixer concealed trim-set hot water safety device 40 °C without shut-off valve</p> <p>required accessories: Thermostat concealed thermostatic mixer DN 15</p>	chrome gold plated 23 carat 	517190520 517194520
	<p>KLUDI 1926 concealed thermostatic mixer concealed trim-set crystal handle "Made with Swarovski® Elements" hot water safety device 40 °C with shut-off valve</p> <p>required accessories: Thermostat concealed thermostatic mixer DN 15</p>	chrome gold plated 23 carat 	5172005G5 5172045G4



THERMOSTAT CONCEALED

product	product description	surface	art. no.
 	KLUDI 1926 concealed thermostatic mixer concealed trim-set hot water safety device 40 °C with shut-off valve required accessories: Thermostat concealed thermostatic mixer DN 15	chrome gold plated 23 carat 	517200520 517204520 35156
 	KLUDI AMBA concealed thermostatic bath- and shower mixer concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve cylindrical handle, metal hot water safety device 38 °C flow class B required accessories: KLUDI FLEXX.BOXX concealed body DN 20	chrome 	538300575 88011
 	KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C soft-edge escutcheon required accessories: KLUDI FLEXX.BOXX concealed body DN 20	chrome 	389010538 88011
 	KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for two outlets hot water safety device 38 °C soft-edge escutcheon required accessories: KLUDI FLEXX.BOXX concealed body DN 20	chrome 	389110538 88011
 	KLUDI PUSH concealed thermostatic mixer concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C round escutcheon required accessories: KLUDI FLEXX.BOXX concealed body DN 20	chrome 	389020538 88011




THERMOSTAT CONCEALED

product

product description

surface

art. no.

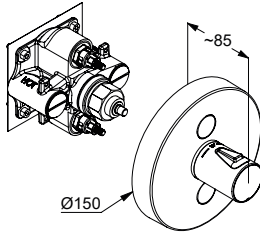

KLUDI PUSH
concealed thermostatic mixer
concealed valve with functional unit
with push-button on/off control for two outlets
hot water safety device 38 °C
round escutcheon

required accessories:
KLUDI FLEXX.BOX
concealed body DN 20

chrome



389120538

88011





Shower Systems



SHOWERS

Shower Dreams

FITTINGS

Shower Systems 148
Shower Duo 158
Hand showers 160

Shower sets & wall rails 166
Head showers 182
Shower hoses & accessories 194

WASTES

Washbasin and bidet wastes 202

Bath- and shower wastes 207



SHOWER SYSTEMS


product

product description

surface

art. no.

Shower systems

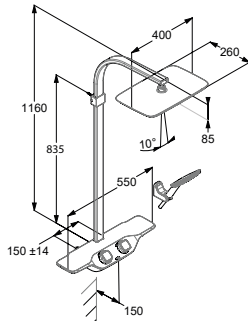


KLUDI COCKPIT

Discovery

Thermostat Dual Shower System DN 15
 shelf 550 mm
 wall fastening
 KLUDI FRESHLINE shower hook 6455205-00
 adjustable in the angle of inclination (75 °)
 temperature control handle
 with hot water safety device 40 °C
 with ceramic shut-off valve
 shower outlet G 1/2
 hand shower rotary valve left
 shower outlet
 head shower rotary valve right
 protected against back flow
 KLUDI SUPARAFLEX SILVER hose 6107205-00
 with KLUDI FRESHLINE head shower 6440005-00
 flow rate 17 l/min at 3 bar
 with KLUDI FRESHLINE handshower CL 1S
 6450005-00
 flow rate 14 l/min at 3 bar
 with mounting material

white/chrome

8020091-00

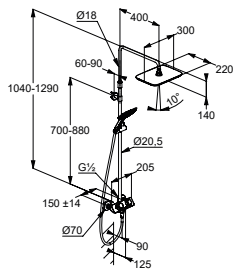


KLUDI COCKPIT

Explorer

Thermostat Dual Shower System DN 15
 wall fastening
 with horizontally and vertically adjustable tube
 horizontal and vertical adjustable slider
 temperature control handle
 with hot water safety device 40 °C
 with ceramic shut-off valve as rotary valve 90°/90°
 shower outlet G 1/2
 hand shower rotary valve left
 shower outlet
 head shower rotary valve right
 protected against back flow
 dirt catcher sieves
 KLUDI SUPARAFLEX SILVER hose 6107205-00
 with KLUDI FRESHLINE head shower 6445005-00
 flow rate handshower 20 l/min bei 3 bar
 with KLUDI FRESHLINE handshower CL 1S
 6450005-00
 with mounting material

chrome

8005005-00



KLUDI COCKPIT

shelf

100 x 200 mm
 for COCKPIT Explorer 8005005-00

6410110-00




SHOWER SYSTEMS

product

product description

surface


art. no.

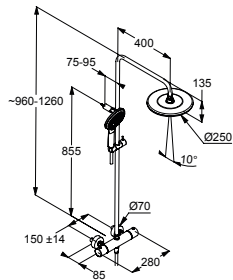

KLUDI FRESHLINE
Thermostat Dual Shower System DN 15
 wall fastening
 with horizontally and vertically adjustable tube
 horizontal and vertical adjustable slider
 temperature control handle
 with hot water safety device 38° C
 With optional temperature limit stop at 43 ° C
 with ceramic shut-off valve as rotary valve 90°/90°
 shower outlet G 1/2
 hand shower rotary valve
 shower outlet
 head shower rotary valve
 protected against back flow
 KLUDI SUPARAFLEX SILVER hose 6107205-00
 with KLUDI FRESHLINE head shower 6751105-00
 flow rate 16,4 l/min at 3 bar
 with KLUDI FRESHLINE handshower RL 3S
 6790005-00
 flow rate 13,6 l/min (booster) / 10,9 l/min
 (smooth) / 17,1 l/min (volumen) at 3 bar
 with draining function
 with mounting material

chrome

6709205-00

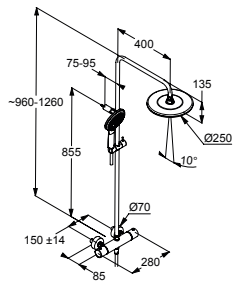

KLUDI FRESHLINE
Thermostat Dual Shower System DN 15
 wall fastening
 with horizontally and vertically adjustable tube
 horizontal and vertical adjustable slider
 temperature control handle
 with hot water safety device 38° C
 With optional temperature limit stop at 43 ° C
 with ceramic shut-off valve as rotary valve 90°/90°
 shower outlet G 1/2
 hand shower rotary valve
 shower outlet
 head shower rotary valve
 protected against back flow
 KLUDI SUPARAFLEX SILVER hose 6107205-00
 with KLUDI FRESHLINE head shower 6751105-00
 flow rate 8 l/min at 3 bar
 with KLUDI FRESHLINE handshower RL 3S
 6790005-00
 flow rate 8 l/min at 3 bar
 with draining function
 with mounting material

chrome


6709205-00WR9





SHOWER SYSTEMS

product

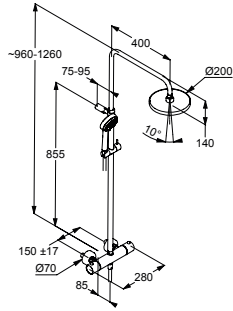

product description

KLUDI LOGO

Thermostat Dual Shower System DN 15

wall fastening
with horizontally and vertically adjustable tube
horizontal and vertical adjustable slider
temperature control handle with hot water safety device 38° C
With optional temperature limit stop at 43 ° C
with ceramic shut-off valve as rotary valve 90°/90°
shower outlet G 1/2
hand shower rotary valve
shower outlet
head shower rotary valve
dirt catcher sieves
protected against back flow
with KLUDI SUPARAFLEX SILVER-hose
G 1/2 x G 1/2 x 1600 mm
with KLUDI A-QA headshower Ø 200 mm
flow rate 16 l/min at 3 bar
with KLUDI LOGO hand shower 3S 6830005-00
adjustable to three spray patterns:
booster, smooth, volume
flow rate 13,5 l/min (booster) / 10 l/min (smooth) /
15 l/min (volumen) at 3 bar
with draining function
with mounting material


surface

chrome



art. no.

6809205-00

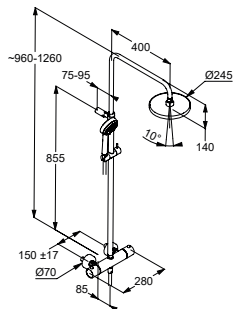

KLUDI LOGO

Thermostat Dual Shower System DN 15

wall fastening
with horizontally and vertically adjustable tube
horizontal and vertical adjustable slider
temperature control handle with hot water safety device 38° C
With optional temperature limit stop at 43 ° C
with ceramic shut-off valve as rotary valve 90°/90°
shower outlet G 1/2
hand shower rotary valve
shower outlet
head shower rotary valve
dirt catcher sieves
protected against back flow
with KLUDI SUPARAFLEX SILVER-hose
G 1/2 x G 1/2 x 1600 mm
with KLUDI A-QA headshower Ø 245 mm
flow rate 16 l/min at 3 bar
KLUDI LOGO 3S hand shower DN 15
adjustable to three spray patterns:
booster, smooth, volume
flow rate 13,5 l/min (booster) / 10 l/min (smooth) /
15 l/min (volumen) at 3 bar
with draining function
with mounting material

matt black



6808239-00




SHOWER SYSTEMS

product

product description

surface

art. no.

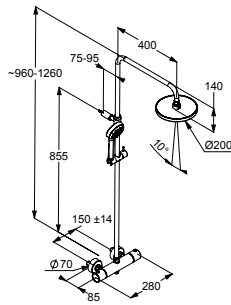


KLUDI LOGO

Thermostat Dual Shower System DN 15

with horizontally and vertically adjustable tube
horizontal and vertical adjustable slider
wall fastening
temperature control handle with hot water safety device 38° C
With optional temperature limit stop at 43 ° C
with ceramic shut-off valve as rotary valve 90°/90°
shower outlet G 1/2
hand shower rotary valve
shower outlet
head shower rotary valve
dirt catcher sieves
protected against back flow
KLUDI SUPARAFLEX SILVER hose 6107205-00
G 1/2 x G 1/2 x 1600 mm
anti twist
with conical nuts
with KLUDI A-QA headshower Ø 200 mm
flow rate 16 l/min at 3 bar
with KLUDI LOGO 1S hand shower DN 15
6810005-00
flow rate 21 l/min at 3 bar
with mounting material

chrome

6809505-00

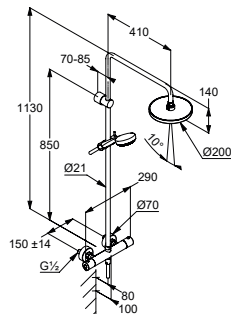

KLUDI LOGO

Thermostat Dual Shower System DN 15

Riser pipe can be swiveled in 6 specified steps / not height adjustable
horizontal and vertical adjustable slider
wall fastening
temperature control handle with hot water safety device 38° C
with ceramic shut-off valve as rotary valve 90°/90°
shower outlet G 1/2
hand shower rotary valve
shower outlet
head shower rotary valve to the rear
dirt catcher sieves
protected against back flow
KLUDI SUPARAFLEX SILVER hose 6107205-00
G 1/2 x G 1/2 x 1600 mm
anti twist
with conical nuts
with KLUDI A-QA headshower Ø 200 mm
flow rate 16 l/min at 3 bar
with KLUDI LOGO 1S hand shower DN 15
6810005-00
flow rate 21 l/min at 3 bar
with mounting material

chrome

6809405-00






SHOWER SYSTEMS

product

product description

surface


art. no.

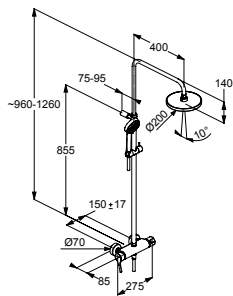

KLUDI LOGO
single lever mixer Dual Shower System DN 15
solid lever
wall fastening
with horizontally and vertically adjustable tube
horizontal and vertical adjustable slider
ceramic cartridge with hot water limitation
shower outlet G 1/2
90° adjustable rotary valve
for the control of head and hand shower
shower outlet
protected against back flow
KLUDI SUPARAFLEX SILVER hose 6107205-00
G 1/2 x G 1/2 x 1600 mm
with KLUDI A-QA headshower Ø 200 mm
flow rate 18 l/min at 3 bar
with KLUDI LOGO hand shower 3S 6830005-00
adjustable to three spray patterns:
booster, smooth, volume
flow rate 10,5 l/min (booster) / 10,7 l/min
(smooth) / 17 l/min (volumen) at 3 bar
with draining function
with mounting material

chrome

6808505-00

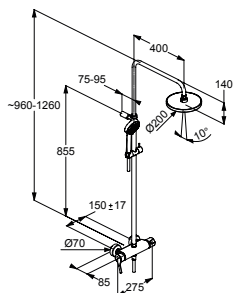

KLUDI LOGO
single lever mixer Dual Shower System DN 15
solid lever
wall fastening
with horizontally and vertically adjustable tube
horizontal and vertical adjustable slider
ceramic cartridge with hot water limitation
shower outlet G 1/2
90° adjustable rotary valve
for the control of head and hand shower
shower outlet
protected against back flow
KLUDI SUPARAFLEX SILVER hose 6107205-00
G 1/2 x G 1/2 x 1600 mm
with KLUDI A-QA headshower Ø 200 mm
flow rate 6 l/min at 3 bar
with KLUDI LOGO hand shower 3S 6830005-00
adjustable to three spray patterns:
booster, smooth, volume
flow rate 6 l/min at 3 bar
with draining function
with mounting material

chrome

6808505-00WR6






SHOWER SYSTEMS

product

product description

surface


art. no.

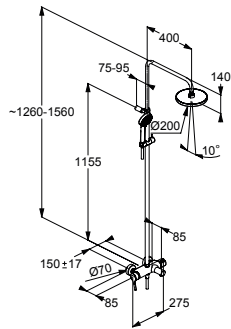

KLUDI LOGO
single lever mixer Dual Shower System DN 15
 with bath filler
 solid lever
 wall fastening
 with horizontally and vertically adjustable tube
 horizontal and vertical adjustable slider
 ceramic cartridge with hot water limitation
 shower outlet G 1/2
 120° adjustable rotary valve
 for the control of head-, hand shower and bath filler
 shower outlet
 protected against back flow
 KLUDI SUPARAFLEX SILVER hose 6107205-00
 G 1/2 x G 1/2 x 1600 mm
 with KLUDI A-QA headshower Ø 200 mm
 flow rate 21 l/min at 3 bar
 with KLUDI LOGO hand shower 3S 6830005-00
 adjustable to three spray patterns:
 booster, smooth, volume
 flow rate 10,5 l/min (booster) / 10,7 l/min
 (smooth) / 17 l/min (volumen) at 3 bar
 with draining function
 with mounting material

chrome

6808305-00

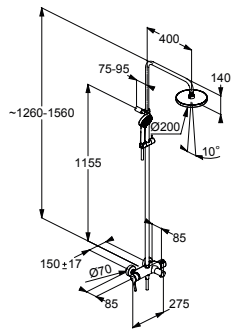

KLUDI LOGO
single lever mixer Dual Shower System DN 15
 with bath filler
 solid lever
 wall fastening
 with horizontally and vertically adjustable tube
 horizontal and vertical adjustable slider
 ceramic cartridge with hot water limitation
 shower outlet G 1/2
 120° adjustable rotary valve
 for the control of head-, hand shower and bath filler
 shower outlet
 protected against back flow
 KLUDI SUPARAFLEX SILVER hose 6107205-00
 G 1/2 x G 1/2 x 1600 mm
 with KLUDI A-QA headshower Ø 200 mm
 flow rate 8 l/min at 3 bar
 with KLUDI LOGO hand shower 3S 6830005-00
 adjustable to three spray patterns:
 booster, smooth, volume
 flow rate 8 l/min at 3 bar
 with draining function
 with mounting material

chrome

6808305-00WR9






SHOWER SYSTEMS

product

product description

surface


art. no.

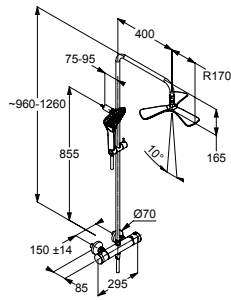

KLUDI FIZZ
Thermostat Dual Shower System DN 15
 wall fastening
 with horizontally and vertically adjustable tube
 horizontal and vertical adjustable slider
 temperature control handle with hot water safety device 38° C
 with ceramic shut-off valve as rotary valve 90°/90°
 shower outlet G 1/2
 hand shower rotary valve
 shower outlet
 head shower rotary valve
 protected against back flow
 KLUDI SUPARAFLEX SILVER hose 6107205-00
 with KLUDI FIZZ head shower 6757805-00
 flow rate 20 l/min at 3 bar
 with KLUDI FIZZ handshower 3S 6770005-00
 flow rate 11,6 l/min (booster) / 11,7 l/min (smooth) / 15,5 l/min (volumen) at 3 bar
 with draining function
 with mounting material

chrome

6709605-00

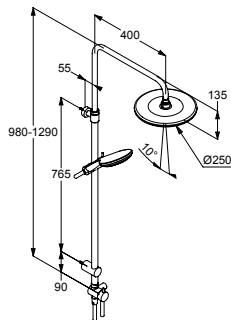

KLUDI FRESHLINE
Dual Shower System DN 15
 wall fastening
 with horizontally and vertically adjustable tube
 two-way ceramic diverter
 horizontal and vertical adjustable slider
 water supply with connecting hose G 1/2 x G 1/2 x 800 mm
 KLUDI SUPARAFLEX SILVER hose 6107205-00
 with KLUDI FRESHLINE head shower 6751105-00
 flow rate 14 l/min at 3 bar
 with KLUDI FRESHLINE handshower RL 3S 6790005-00
 adjustable to three spray patterns:
 booster, smooth, volume
 flow rate 10 l/min (booster) / 9 l/min (smooth) / 12 l/min (volumen) at 3 bar
 with draining function
 with mounting material
 without shower mixer

chrome

6709005-00






SHOWER SYSTEMS

product

product description

surface


art. no.

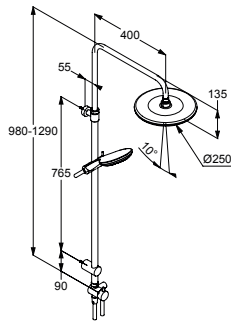

**KLUDI FRESHLINE
Dual Shower System DN 15**
wall fastening
with horizontally and vertically adjustable tube
two-way ceramic diverter
horizontal and vertical adjustable slider
water supply with
connecting hose G 1/2 x G 1/2 x 800 mm
KLUDI SUPARAFLEX SILVER hose 6107205-00
with KLUDI FRESHLINE head shower 6751105-00
flow rate 8 l/min at 3 bar
with KLUDI FRESHLINE handshower RL 3S
6790005-00
adjustable to three spray patterns:
booster, smooth, volume
flow rate 8 l/min at 3 bar
with draining function
with mounting material
without shower mixer

chrome

6709005-00WR9

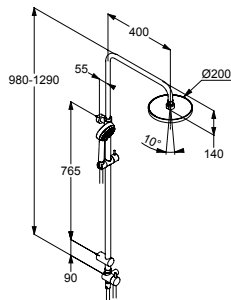

**KLUDI LOGO
Dual Shower System DN 15**
wall fastening
with horizontally and vertically adjustable tube
horizontal and vertical adjustable slider
two-way ceramic diverter
water supply with
connecting hose G 1/2 x G 1/2 x 800 mm
KLUDI SUPARAFLEX SILVER hose 6107205-00
G 1/2 x G 1/2 x 1600 mm
with KLUDI A-QA headshower Ø 200 mm
flow 13 l/min at 3 bar
with KLUDI LOGO hand shower 3S 6830005-00
adjustable to three spray patterns:
booster, smooth, volume
flow rate 10,5 l/min (booster) / 10,7 l/min (smooth) /
12,9 l/min (volumen) at 3 bar
with draining function
with mounting material
without shower mixer

chrome

6809105-00






SHOWER SYSTEMS

product

product description

surface


art. no.

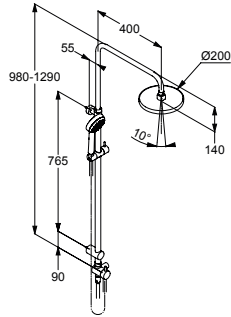

KLUDI LOGO
Dual Shower System DN 15
wall fastening
with horizontally and vertically adjustable tube
horizontal and vertical adjustable slider
two-way ceramic diverter
water supply with
connecting hose G 1/2 x G 1/2 x 800 mm
KLUDI SUPARAFLEX SILVER hose 6107205-00
G 1/2 x G 1/2 x 1600 mm
with KLUDI A-QA headshower Ø 200 mm
flow 13 l/min at 3 bar
with KLUDI LOGO 1S hand shower DN 15
6810005-00
flow rate 16 l/min at 3 bar
with mounting material
without shower mixer

chrome

6809305-00

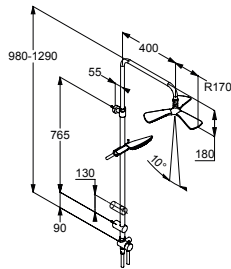

KLUDI FIZZ
Dual Shower System DN 15
wall fastening
with horizontally and vertically adjustable tube
horizontal and vertical adjustable slider
two-way ceramic diverter
water supply with
connecting hose G 1/2 x G 1/2 x 800 mm
KLUDI SUPARAFLEX SILVER hose 6107205-00
with KLUDI FIZZ head shower 6757805-00
flow rate 15 l/min at 3 bar
with KLUDI FIZZ handshower 3S 6770005-00
adjustable to three spray patterns:
booster, smooth, volume
flow rate 10 l/min (booster) / 8,5 l/min (smooth)
/ 11 l/min (volumen) at 3 bar
with draining function
with mounting material
without shower mixer

chrome

6709305-00





Shower Duo



Dusche | Shower Duo

SHOWERS

Shower Dreams

FITTINGS

Shower Systems

148

Shower Duo

158

Hand showers

160

Shower sets & wall rails

166

Head showers

182

Shower hoses & accessories

194

WASTES

Washbasin and bidet wastes

202

Bath- and shower wastes


207



SHOWER DUO

product

Shower duo

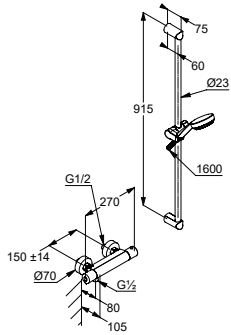

product description

KLUDI LOGO SHOWER DUO

L = 900 mm

KLUDI LOGO wall rail \varnothing 23 mm
 KLUDI BASIC thermostatic shower mixer DN 15
 wall fastening
 with shut-off valve
 temperature control handle
 with hot water safety device 38° C
 protected against back flow
 dirt catcher sieves
 shower outlet G 1/2
 with KLUDI LOGO 1S hand shower DN 15
 6810005-00
 with spray mode: volume
 with KLUDI LOGOFLEX-hose 6105605-00
 G 1/2 x G 1/2 x 1600 mm
 plastic-coated
 with metal-effect


surface

chrome



art. no.

6857805-00

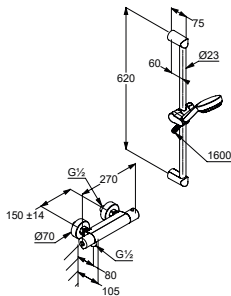

KLUDI LOGO SHOWER DUO

L = 600 mm

KLUDI LOGO wall rail \varnothing 23 mm
 KLUDI BASIC thermostatic shower mixer DN 15
 wall fastening
 with shut-off valve
 temperature control handle
 with hot water safety device 38° C
 protected against back flow
 dirt catcher sieves
 shower outlet G 1/2
 with KLUDI LOGO 1S hand shower DN 15
 6810005-00
 with spray mode: volume
 with KLUDI LOGOFLEX-hose 6105605-00
 G 1/2 x G 1/2 x 1600 mm
 plastic-coated
 with metal-effect

chrome



6857505-00



Hand showers



SHOWERS

Showers

FITTINGS

Showers Systems
Showers Duo
Hand showers

148
158
160

Showers sets & wall rails
Head showers
Showers hoses & accessories

166
182
194

WASTES

Washbasin and bidet wastes
















202

Bath- and showers wastes

207



HAND SHOWER

product	product description	surface	art. no.
 <p>hand shower</p>	 <p>KLUDI NOVA FONTE hand shower 1S DN 15 with spray mode: volume quick and easy cleaning system flow rate 11 l/min at 3 bar connection G 1/2</p>	chrome matt black matt white 	3912005-00 3912039-00 3912053-00
	 <p>KLUDI FRESHLINE hand shower CL 1S with spray mode: volume flow rate 22 l/min at 3 bar quick and easy cleaning system connection G 1/2</p>	chrome 	6450005-00
	 <p>KLUDI FRESHLINE hand shower CL 1S with spray mode: volume flow rate 9 l/min at 3 bar quick and easy cleaning system connection G 1/2</p>	chrome 	6450005-00WR9
	 <p>KLUDI FRESHLINE hand shower RL 3S adjustable to three spray patterns: booster, smooth, volume flow rate 19 l/min (booster) / 11 l/min (smooth) / 26 l/min (volumen) at 3 bar quick and easy cleaning system with draining function connection G 1/2</p>	chrome white 	6790005-00 6790043-00
	 <p>KLUDI FRESHLINE hand shower RL 3S adjustable to three spray patterns: booster, smooth, volume flow rate 9 l/min at 3 bar quick and easy cleaning system with draining function connection G 1/2</p>	chrome 	6790005-00WR9



HAND SHOWER

product	product description	surface	art. no.
	 <p>KLUDI FRESHLINE hand shower RS 1S with spray mode: volume flow rate 29 l/min at 3 bar quick and easy cleaning system connection G 1/2</p>	chrome white 	6780005-00 6780043-00
	 <p>KLUDI FRESHLINE hand shower RS 1S with spray mode: volume flow rate 9 l/min at 3 bar quick and easy cleaning system connection G 1/2</p>	chrome 	6780005-00WR9
	 <p>KLUDI FRESHLINE hand shower RS 1S with spray mode: volume flow rate 5 l/min. at 3 bar quick and easy cleaning system connection G 1/2</p>	chrome 	6780005R-00
	 <p>KLUDI LOGO hand shower 1S DN 15 with spray mode: volume flow rate 41 l/min at 3 bar quick and easy cleaning system connection G 1/2</p>	chrome 	6810005-00
	 <p>KLUDI LOGO hand shower 1S DN 15 with spray mode: volume flow rate 9 l/min at 3 bar quick and easy cleaning system connection G 1/2</p>	chrome 	6810005-00WR9



HAND SHOWER

product	product description	surface	art. no.
 	KLUDI LOGO hand shower 1S DN 15 with spray mode: volume flow rate 5 l/min. at 3 bar quick and easy cleaning system connection G 1/2	chrome 	6810005R-00
 	KLUDI LOGO hand shower 3S DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 13 l/min (booster) / 10 l/min (smooth) / 15 l/min (volumen) at 3 bar quick and easy cleaning system with draining function connection G 1/2	chrome matt black 	6830005-00 6830039-00
 	KLUDI LOGO hand shower 3S DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 9 l/min at 3 bar quick and easy cleaning system with draining function connection G 1/2	chrome 	6830005-00WR9
 	KLUDI FIZZ hand shower 3S DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 15 l/min (booster) / 11,5 l/min (smooth) / 19 l/min (volumen) at 3 bar quick and easy cleaning system with draining function connection G 1/2	chrome white matt black 	6770005-00 6770043-00 6770039-00
 	KLUDI FIZZ hand shower 3S DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 8 l/min at 3 bar quick and easy cleaning system with draining function connection G 1/2	chrome 	6770005-00WR9




HAND SHOWER

product

product description

surface

art. no.

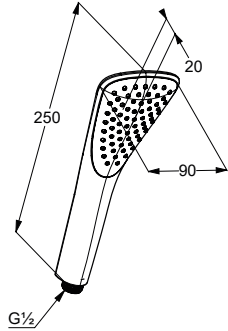


KLUDI FIZZ
hand shower 1S DN 15
with spray mode: volume
flow rate 19,2 l/min at 3 bar
quick and easy cleaning system
connection G 1/2
PA-IX 7506/IS

chrome
matt black



6760005-00
6760039-00

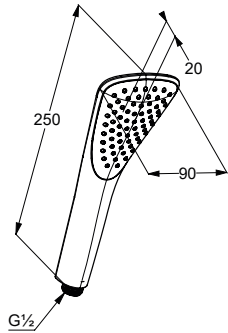

KLUDI FIZZ
hand shower 1S DN 15
with spray mode: volume
flow rate 8 l/min at 3 bar
quick and easy cleaning system
connection G 1/2
PA-IX 7506/IS

chrome



6760005-00WR9





Shower sets & wall rails



SHOWERS

Shower Dreams

FITTINGS

Shower Systems
Shower Duo
Hand showers

148
158
160

WASTES

Washbasin and bidet wastes

202

Shower sets & wall rails

Head showers

Shower hoses & accessories


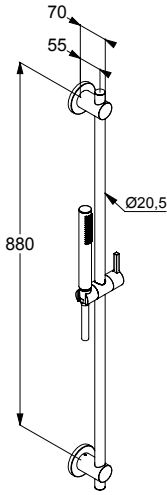




166
182
194

Bath- and shower wastes

207


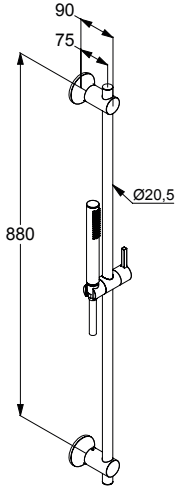


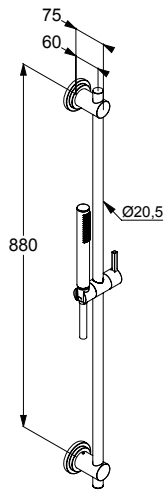



SHOWER SETS & WALL RAILS

product	product description	surface	art. no.
<p>shower sets</p> 	 <p>KLUDI NOVA FONTE Puristic shower set 1S L = 900 mm metal wall rail horizontal and vertical adjustable slider hand shower DN 15 with spray mode: volume flow rate 11 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1600 mm plastic-coated with conical nuts with dirt catcher sieves with mounting material</p>	<p>chrome matt black matt white</p> 	<p>2084005-15 2084039-15 2084053-15</p>
	 <p>KLUDI NOVA FONTE Classic shower set 1S L = 900 mm metal wall rail horizontal and vertical adjustable slider hand shower DN 15 with spray mode: volume flow rate 11 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1600 mm plastic-coated with conical nuts with dirt catcher sieves with mounting material</p>	<p>chrome</p> 	<p>2084005-25</p>



SHOWER SETS & WALL RAILS

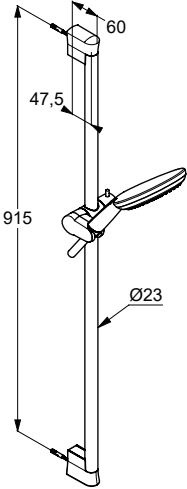product	product description	surface	art. no.
 	<p>KLUDI NOVA FONTE Déco shower set 1S L = 900 mm metal wall rail horizontal and vertical adjustable slider hand shower DN 15 with spray mode: volume flow rate 11 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1600 mm plastic-coated with conical nuts with dirt catcher sieves with mounting material</p>	chrome 	2084005-35
 	<p>KLUDI FRESHLINE shower set 3S L = 900 mm horizontal and vertical adjustable slider KLUDI FRESHLINE handshower RL 3S adjustable to three spray patterns: booster, smooth, volume flow rate 15 l/min (booster) / 10 l/min (smooth) / 18,8 l/min (volumen) at 3 bar quick and easy cleaning system with draining function KLUDI SUPARAFLEX hose plastic-coated with conical nuts with dirt catcher sieves with mounting material G 1/2 x G 1/2 x 1600 mm</p>	chrome white/chrome 	6794005-00 6794091-00




SHOWER SETS & WALL RAILS

product

product description

surface

art. no.

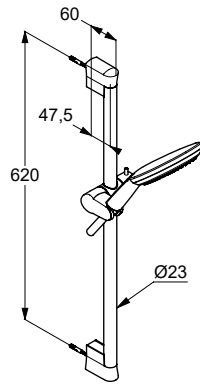


KLUDI FRESHLINE shower set 3S

L = 600 mm
horizontal and vertical adjustable slider
KLUDI FRESHLINE handshower RL 3S
adjustable to three spray patterns:
booster, smooth, volume
flow rate 15 l/min (booster) / 10 l/min
(smooth) / 18,8 l/min (volumen) at 3 bar
quick and easy cleaning system
with draining function
KLUDI SUPARAFLEX SILVER
G 1/2 x G 1/2 x 1600 mm
plastic-coated
with conical nuts
with dirt catcher sieves
with mounting material

chrome



6793005-00

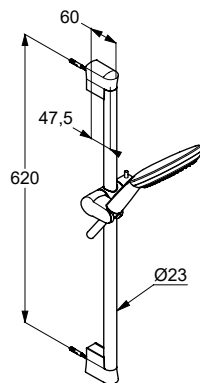

KLUDI FRESHLINE shower set 3S

L = 600 mm
horizontal and vertical adjustable slider
KLUDI FRESHLINE handshower RL 3S
adjustable to three spray patterns:
booster, smooth, volume
flow rate 8 l/min at 3 bar
quick and easy cleaning system
with draining function
KLUDI SUPARAFLEX SILVER
G 1/2 x G 1/2 x 1600 mm
plastic-coated
with conical nuts
with dirt catcher sieves
with mounting material


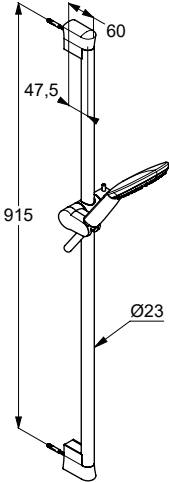




chrome



6793005-00WR9



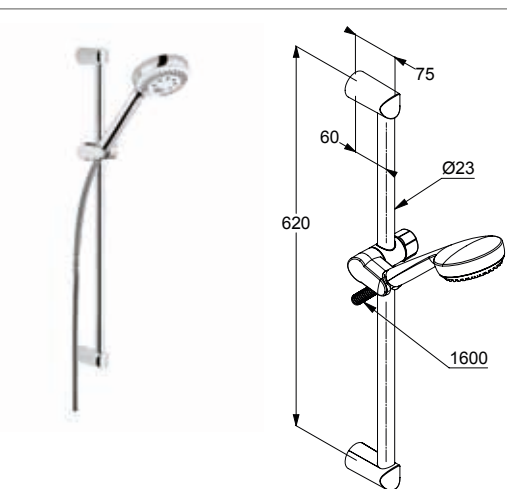



SHOWER SETS & WALL RAILS

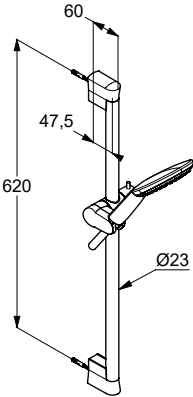product	product description	surface	art. no.
	 <p>KLUDI FRESHLINE shower set 1S L = 900 mm horizontal and vertical adjustable slider KLUDI FRESHLINE handshower RS 1S with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX hose G 1/2 x G 1/2 x 1600 mm plastic-coated with conical nuts with dirt catcher sieves with mounting material</p>	chrome white/chrome 	6784005-00 6784091-00
	 <p>KLUDI FRESHLINE shower set 1S L = 600 mm horizontal and vertical adjustable slider KLUDI FRESHLINE handshower RS 1S with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER G 1/2 x G 1/2 x 1600 mm plastic-coated with conical nuts with dirt catcher sieves with mounting material</p>	chrome 	6783005-00



SHOWER SETS & WALL RAILS

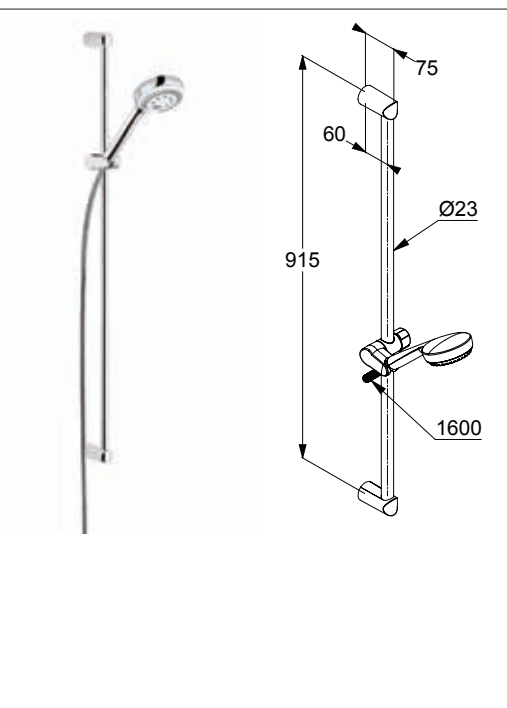product	product description	surface	art. no.
	<p>KLUDI LOGO shower set 3S L = 900 mm wall rail Ø 23 mm KLUDI LOGO 3S hand shower DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 13 l/min (booster) / 10 l/min (smooth) / 15 l/min (volumen) at 3 bar quick and easy cleaning system with draining function KLUDI LOGOFLEX shower hose G 1/2 x G 1/2 x 1600 mm plastic-coated with metal-effect with conical nuts</p>	chrome 	6839305-00
	<p>KLUDI LOGO shower set 3S L = 600 mm wall rail Ø 23 mm KLUDI LOGO 3S hand shower DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 13 l/min (booster) / 10 l/min (smooth) / 15 l/min (volumen) at 3 bar quick and easy cleaning system with draining function KLUDI LOGOFLEX shower hose G 1/2 x G 1/2 x 1600 mm plastic-coated with metal-effect with conical nuts</p>	chrome 	6836305-00




SHOWER SETS & WALL RAILS

product

product description

surface

art. no.

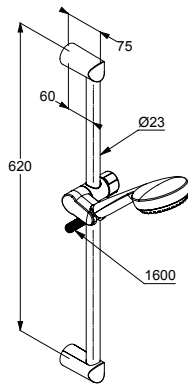


KLUDI LOGO shower set 3S

L = 600 mm
wall rail Ø 23 mm
KLUDI LOGO 3S hand shower DN 15
adjustable to three spray patterns:
booster, smooth, volume
flow rate 8 l/min at 3 bar
quick and easy cleaning system
with draining function
KLUDI LOGOFLEX
shower hose
G 1/2 x G 1/2 x 1600 mm
plastic-coated
with metal-effect
with conical nuts

chrome



6836305-00WR9

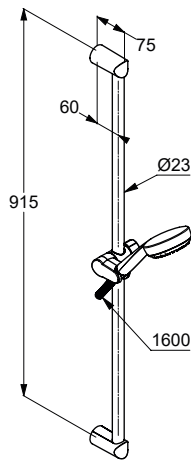

KLUDI LOGO shower set 1S

L = 900 mm
KLUDI LOGO wall rail Ø 23 mm
with KLUDI LOGO 1S hand shower DN 15
6810005-00
with spray mode: volume
flow rate 23 l/min at 3 bar
quick and easy cleaning system
KLUDI LOGOFLEX
shower hose
G 1/2 x G 1/2 x 1600 mm
plastic-coated
with metal-effect
with conical nuts

chrome



6819005-00




SHOWER SETS & WALL RAILS

product

product description

surface

art. no.

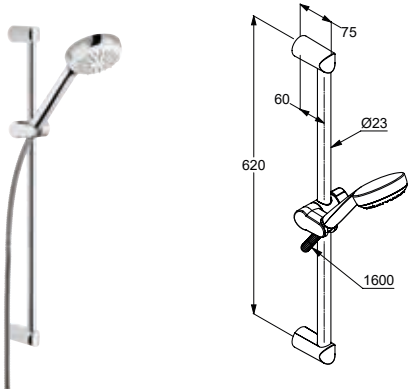


**KLUDI LOGO
shower set 1S**

L = 600 mm
KLUDI LOGO wall rail Ø 23 mm
with KLUDI LOGO 1S hand shower DN 15
6810005-00
with spray mode: volume
flow rate 23 l/min at 3 bar
quick and easy cleaning system
KLUDI LOGOFLEX
shower hose
G 1/2 x G 1/2 x 1600 mm
plastic-coated
with metal-effect
with conical nuts

chrome



6816005-00

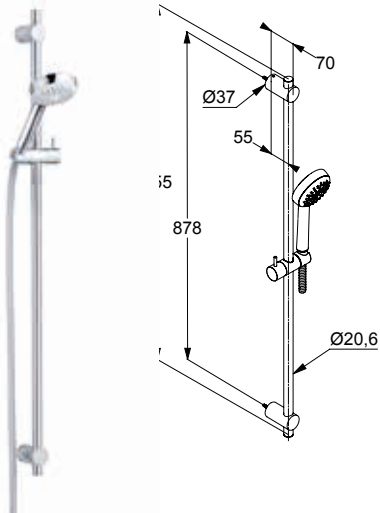

**KLUDI LOGO
shower set 1S**

L = 955 mm
metal wall rail Ø 21 mm
horizontal and vertical adjustable slider
with KLUDI LOGO 1S hand shower DN 15
6810005-00
flow rate 14 l/min at 3 bar
with KLUDI SUPARAFLEX SILVER-hose
G 1/2 x G 1/2 x 1600 mm
anti twist
with conical nuts




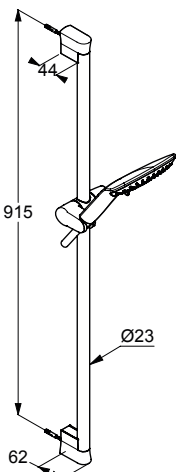

chrome



6864205-00



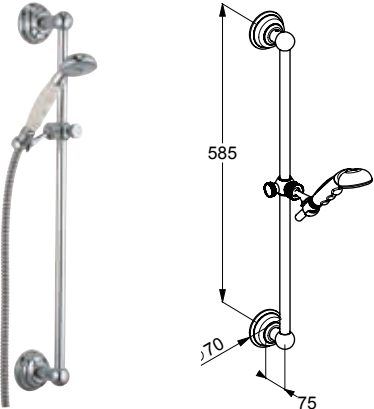


SHOWER SETS & WALL RAILS

product	product description	surface	art. no.
	 <p>KLUDI FIZZ shower set 3S L = 900 mm wall rail horizontal and vertical adjustable slider KLUDI FIZZ hand shower 3S DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 14 l/min (booster) / 11 l/min (smooth) / 16 l/min (volumen) at 3 bar with draining function KLUDI SUPARAFLEX hose G 1/2 x G 1/2 x 1600 mm plastic-coated with conical nuts</p>	chrome white/chrome matt black/ chrome 	6774005-00 6774091-00 6774087-00
	 <p>KLUDI FIZZ shower set 3S L = 900 mm wall rail horizontal and vertical adjustable slider KLUDI FIZZ hand shower 3S DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 8 l/min at 3 bar with draining function KLUDI SUPARAFLEX hose G 1/2 x G 1/2 x 1600 mm plastic-coated with conical nuts</p>	chrome white/chrome matt black/ chrome 	6774005-00WR9 6774091-00WR9 6774087-00WR9


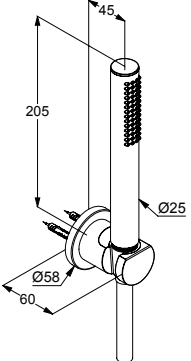


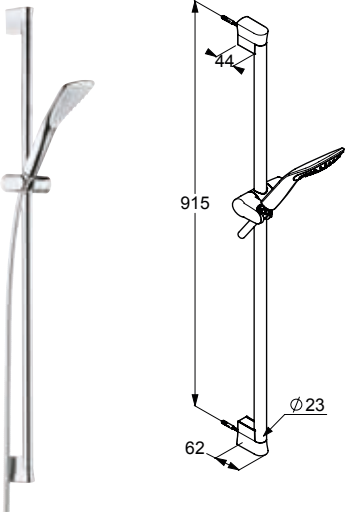



SHOWER SETS & WALL RAILS

product	product description	surface	art. no.
	<p>KLUDI FIZZ shower set 1S L = 900 mm wall rail horizontal and vertical adjustable slider KLUDI FIZZ hand shower 1S DN 15 with spray mode: volume flow rate 29 l/min at 3 bar KLUDI SUPARAFLEX hose G 1/2 x G 1/2 x 1600 mm plastic-coated with conical nuts</p>	chrome white/chrome matt black/ chrome 	6764005-00 6764091-00 6764087-00
	<p>KLUDI 1926 shower set consisting of: wall rail 600 mm hand shower KLUDI 1926 sliding joint with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1600 mm flow rate 22,5 l/min at 3 bar</p>	chrome gold plated 23 carat	2710305 2710345



SHOWER SETS & WALL RAILS

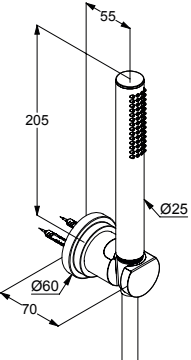product	product description	surface	art. no.
<p data-bbox="97 358 191 392">bath sets</p>  	<p data-bbox="598 358 798 414">KLUDI NOVA FONTE Puristic</p> <p data-bbox="598 414 1013 672">bath shower set 1S hand shower DN 15 with spray mode: volume flow rate 11 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts fixed wall shower hook with screws and dowels wall fastening</p>	<p data-bbox="1141 358 1252 436">chrome matt black matt white</p> 	<p data-bbox="1300 358 1444 436">2085005-15 2085039-15 2085053-15</p>
 	<p data-bbox="598 1075 798 1131">KLUDI NOVA FONTE Classic</p> <p data-bbox="598 1131 1013 1388">bath shower set 1S hand shower DN 15 with spray mode: volume flow rate 11 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts fixed wall shower hook with screws and dowels wall fastening</p>	<p data-bbox="1141 1075 1220 1108">chrome</p> 	<p data-bbox="1300 1075 1444 1108">2085005-25</p>




SHOWER SETS & WALL RAILS

product

product description

surface

art. no.

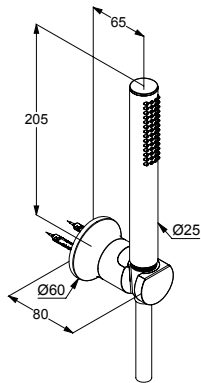

KLUDI NOVA FONTE


Déco

bath shower set 1S
hand shower DN 15
with spray mode: volume
flow rate 11 l/min at 3 bar
quick and easy cleaning system
KLUDI SUPARAFLEX SILVER-hose anti twist
G 1/2 x G 1/2 x 1250 mm
plastic-coated
with conical nuts
fixed wall shower hook
with screws and dowels
wall fastening

chrome



2085005-35




KLUDI FRESHLINE bath-shower set 3S

wall fastening
KLUDI FRESHLINE handshower RL 3S
adjustable to three spray patterns:
booster, smooth, volume
flow rate 15 l/min (booster) / 10 l/min
(smooth) / 18,8 l/min (volumen) at 3 bar
quick and easy cleaning system
with draining function
KLUDI SUPARAFLEX hose
G 1/2 x G 1/2 x 1250 mm
plastic-coated
with metal-effect
with conical nuts
with screws and dowels

chrome
white/chrome



6795005-00
6795091-00

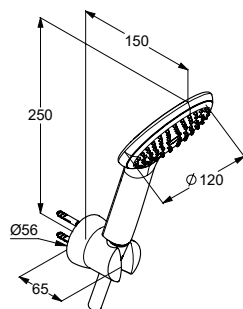

KLUDI FRESHLINE bath shower set 1S

wall fastening
KLUDI FRESHLINE handshower RS 1S
with spray mode: volume
flow rate 23 l/min at 3 bar
quick and easy cleaning system
KLUDI SUPARAFLEX hose
G 1/2 x G 1/2 x 1250 mm
plastic-coated
with conical nuts
with screws and dowels










chrome
white/chrome



6785005-00
6785091-00



SHOWER SETS & WALL RAILS

product	product description	surface	art. no.
 	<p>KLUDI FRESHLINE bath shower set 1S KLUDI FRESHLINE handshower RS 1S with spray mode: volume flow rate 19 l/min at 3 bar KLUDI SUPARAFLEX hose G 1/2 x G 1/2 x 1250 mm with conical nuts wall supply with shower holder DN 15 protected against back flow in compliance with DIN EN 1717 with screws and dowels shower outlet G 1/2 with conical nuts noise level I</p>	chrome white/chrome 	6787005-00 6787091-00
 	<p>KLUDI LOGO bath-shower set 3S KLUDI LOGO 3S hand shower DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 13 l/min (booster) / 10 l/min (smooth) / 15 l/min (volumen) at 3 bar quick and easy cleaning system with draining function KLUDI LOGOFLEX shower hose G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts fixed wall shower hook with screws and dowels</p>	chrome 	6803005-00
 	<p>KLUDI LOGO bath shower set 1S KLUDI LOGO 1S hand shower DN 15 with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system KLUDI LOGOFLEX shower hose G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts fixed wall shower hook with screws and dowels</p>	chrome 	6801005-00




SHOWER SETS & WALL RAILS

product

product description

surface

art. no.

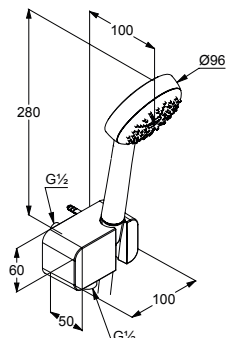


**KLUDI LOGO
bath shower set 1S**
KLUDI LOGO 1S hand shower DN 15
with spray mode: volume
flow rate 23 l/min at 3 bar
quick and easy cleaning system
KLUDI SUPARAFLEX SILVER
G 1/2 x G 1/2 x 1250 mm
with conical nuts
wall supply with shower holder DN 15
protected against back flow
according to DIN EN 1717
with screws and dowels
shower outlet G 1/2

chrome



6867005-00

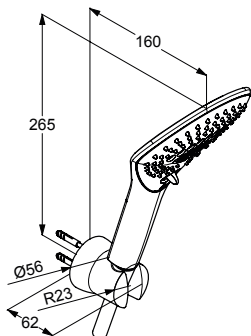

**KLUDI FIZZ
bath-shower set 3S**
KLUDI FIZZ hand shower 3S DN 15
quick and easy cleaning system
adjustable to three spray patterns:
booster, smooth, volume
flow rate 14 l/min (booster) / 11 l/min
(smooth) / 16 l/min (volumen) at 3 bar
with draining function
connection G 1/2
fixed wall shower hook
with screws and dowels
KLUDI SUPARAFLEX hose
G 1/2 x G 1/2 x 1250 mm
plastic-coated
with conical nuts
with mounting material

chrome
white/chrome
matt black/
chrome



6775005-00
6775091-00
6775087-00




SHOWER SETS & WALL RAILS

product

product description

surface

art. no.

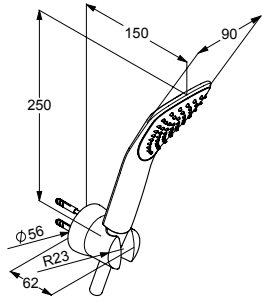


**KLUDI FIZZ
bath shower set 1S**
 KLUDI FIZZ hand shower 1S DN 15
 quick and easy cleaning system
 with spray mode: volume
 flow rate 29 l/min at 3 bar
 connection G 1/2
 fixed wall shower hook
 with screws and dowels
 KLUDI SUPARAFLEX hose
 G 1/2 x G 1/2 x 1250 mm
 plastic-coated
 with conical nuts
 with mounting material
 PA-IX 7506/IS

chrome
 white/chrome
 matt black/
 chrome



6765005-00
6765091-00
6765087-00

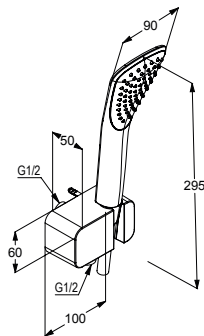


**KLUDI FIZZ
bath shower set 1S**
 KLUDI FIZZ hand shower 1S DN 15
 with spray mode: volume
 quick and easy cleaning system
 flow rate 19 l/min at 3 bar
 KLUDI SUPARAFLEX hose
 G 1/2 x G 1/2 x 1250 mm
 wall supply with shower holder DN 15
 protected against back flow
 in compliance with DIN EN 1717
 with screws and dowels
 shower outlet G 1/2
 with conical nuts

chrome
 white/chrome



6767005-00
6767091-00





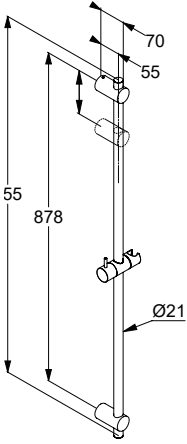
**KLUDI 1926
shower set DN 15**
 wall fastening
 flow class B
 consisting of:
 hand shower KLUDI 1926
 cradle wall holder
 with KLUDI LOGOFLEX-hose
 G 1/2 x G 1/2 x 1600 mm
 connection angle DN 15

chrome
 gold plated
 23 carat

2710505
2710545



SHOWER SETS & WALL RAILS

product	product description	surface	art. no.
wall rails	 <p>KLUDI A-QA v flexible wall rail L = 1100 mm bracket adjustment to existing drill holes up to 1020 mm horizontal and vertical adjustable slider with KLUDI SUPARAFLEX SILVER-hose G 1/2 x G 1/2 x 1600 mm anti twist with conical nuts</p>	chrome	6209505-00
	 <p>KLUDI A-QA wall rail L = 955 mm metal wall rail horizontal and vertical adjustable slider with screws and dowels</p>	chrome	6564105-00



Head showers



SHOWERS

Shower Dreams

FITTINGS

Shower Systems

148

Shower Duo

158

Hand showers

160

Shower sets & wall rails

166

Head showers

182

Shower hoses & accessories

194

WASTES

Washbasin and bidet wastes

202

Bath- and shower wastes

207






HEAD SHOWERS

product	product description	surface	art. no.
head showers 	KLUDI FRESHLINE head shower DN 15 400 x 260 mm with spray mode: volume flow rate 34 l/min at 3 bar quick and easy cleaning system pre-installed dirt cleaner sieve without shower arm connection G 1/2 	chrome 	644005-00
	KLUDI FRESHLINE head shower DN 15 300 x 220 mm with spray mode: volume flow rate 20 l/min at 3 bar quick and easy cleaning system pre-installed dirt cleaner sieve without shower arm connection G 1/2 	chrome 	644505-00
	KLUDI FRESHLINE head shower DN 15 Ø 250 mm flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint without shower arm connection G 1/2 	chrome 	6751105-00
	KLUDI A-QA head shower DN 15 metal head shower wall fastening headshower Ø 250 mm with spray mode: volume quick and easy cleaning system flow rate 24,5 l/min at 3 bar 	chrome 	6487005-00
	KLUDI A-QA head shower DN 15 metal head shower wall fastening headshower Ø 250 mm with spray mode: volume quick and easy cleaning system flow rate 8 l/min at 3 bar 	chrome 	6487005-00WR9













HEAD SHOWERS

product	product description	surface	art. no.
	 <p>KLUDI A-QA head shower DN 15 metal head shower wall fastening headshower Ø 250 mm with spray mode: volume with flood spray quick and easy cleaning system flow rate volume spray: 24,5 l/min at 3 bar flow rate flood spray: 27 l/min at 3 bar Control of 2 spray types via 2 valves or one changeover valve with 2 outlets</p>	chrome white/chrome matt black/chrome 	6488005-00 6488091-00 6488087-00
	 <p>KLUDI A-QA head shower DN 15 Ø 200 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome 	6432005-00
	 <p>KLUDI A-QA head shower DN 15 Ø 200 mm metal head shower with spray mode: volume flow rate 8 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome 	6432005-00WR9
	 <p>KLUDI A-QA head shower DN 15 Ø 250 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome white/chrome matt black/chrome 	6432505-00 6432591-00 6432587-00
	 <p>KLUDI A-QA head shower DN 15 Ø 250 mm metal head shower with spray mode: volume flow rate 8 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome 	6432505-00WR9


















HEAD SHOWERS

product	product description	surface	art. no.
	 <p>KLUDI A-QA head shower DN 15 Ø 300 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome white/chrome matt white matt black/chrome	6433005-00 6433091-00 6433053-00 6433087-00
	 <p>KLUDI A-QA head shower DN 15 Ø 300 mm metal head shower with spray mode: volume flow rate 8 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome	6433005-00WR9
	 <p>KLUDI A-QA head shower DN 15 Ø 400 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm pressure stabilizer at 1 Bar</p>	chrome white/chrome matt black/chrome	6434005-00 6434091-00 6434087-00
	 <p>KLUDI A-QA head shower DN 15 Ø 400 mm metal head shower with spray mode: volume flow rate 8 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm pressure stabilizer at 1 Bar</p>	chrome	6434005-00WR9
	 <p>KLUDI A-QA head shower DN 15 200 x 200 mm metal head shower with spray mode: volume flow rate 11 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome	6442005-00


















HEAD SHOWERS

product	product description	surface	art. no.
	 <p>KLUDI A-QA head shower DN 15 200 x 200 mm metal head shower with spray mode: volume flow rate 8 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome 	6442005-00WR9
	 <p>KLUDI A-QA head shower DN 15 250 x 250 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome white/chrome 	6442505-00 6442591-00
	 <p>KLUDI A-QA head shower DN 15 250 x 250 mm metal head shower with spray mode: volume flow rate 8 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome 	6442505-00WR9
	 <p>KLUDI A-QA head shower DN 15 300 x 300 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome white/chrome 	6443005-00 6443091-00
	 <p>KLUDI A-QA head shower DN 15 300 x 300 mm metal head shower with spray mode: volume flow rate 8 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome 	6443005-00WR9









HEAD SHOWERS

product	product description	surface	art. no.
	 <p>KLUDI A-QA head shower DN 15 400 x 400 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome white/chrome 	6444005-00 6444091-00
	 <p>KLUDI A-QA head shower DN 15 400 x 400 mm metal head shower with spray mode: volume flow rate 9 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome 	6444005-00WR9
	 <p>KLUDI A-QA head shower DN 15 200 x 200 mm Soft-edge metal head shower with spray mode: volume flow rate 19 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome 	6452005-00
	 <p>KLUDI A-QA head shower DN 15 300 x 300 mm Soft-edge metal head shower with spray mode: volume flow rate 14 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome white/chrome 	6453005-00 6453091-00
	 <p>KLUDI A-QA head shower DN 15 300 x 300 mm Soft-edge metal head shower with spray mode: volume flow rate 8 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome 	6453005-00WR9



HEAD SHOWERS

product	product description	surface	art. no.
		chrome 	6651105-00
		chrome  	6652105-00
		chrome 	6651005-00
		chrome 	4940205-00
		chrome 	4940205-00WR9













HEAD SHOWERS

product	product description	surface	art. no.
	KLUDI A-QA head shower DN 15 250 x 250 mm with spray mode: volume flow rate 42 l/min at 3 bar quick and easy cleaning system connection G 1/2 without shower arm noise level I	chrome 	6653105-00
	KLUDI A-QA head shower DN 15 250 x 250 mm with spray mode: volume flow rate 9 l/min at 3 bar quick and easy cleaning system connection G 1/2 without shower arm noise level I	chrome 	6654105-00
	KLUDI A-QA head shower DN 15 200 x 200 mm with spray mode: volume flow rate 25,8 l/min at 3 bar quick and easy cleaning system connection G 1/2 without shower arm noise level I	chrome 	6653005-00
	KLUDI A-QA head shower DN 15 200 x 200 mm with spray mode: volume flow rate 9 l/min at 3 bar quick and easy cleaning system connection G 1/2 without shower arm noise level I	chrome 	6653005-00WR9
	KLUDI A-QA head shower DN 15 quick and easy cleaning system with one spray mode: rainshower flow rate 18 l/min at 3 bar suitable for water heater with a flow capacity for a minimum of 13 l/min without shower arm with ball joint	chrome 	6219105-00



HEAD SHOWERS

product	product description	surface	art. no.
 	KLUDI FIZZ head shower DN 15 diameter 340 mm with three shower cartidge with spray mode: volume flow rate 35 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome 	6757805-00
 	KLUDI FIZZ head shower DN 15 diameter 340 mm with three shower cartidge with spray mode: volume flow rate 8 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome 	6757805-00WR9
 	KLUDI 1926 head shower DN 15 Ø 200 mm quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome gold plated 23 carat	2751005 2751045
side shower  	KLUDI FIZZ side shower DN 15 wall fastening swivelling normal spray flow rate 4 l/min at 3 bar with wall flange (escutcheon) suitable for water heater with a flow capacity for a minimum of 13 l/min with ball joint	chrome	6708305-00









HEAD SHOWERS

product	product description	surface	art. no.
Shower arms	KLUDI A-QA shower arm DN 15 for head shower DN 15 projection 400 mm with push-on rosette 58 x 58 mm	chrome	6654405-00
	KLUDI A-QA shower arm DN 15 for head shower DN 15 projection 250 mm with push-on rosette 58 x 58 mm	chrome	6654305-00
	KLUDI A-QA shower arm DN 15 for head shower DN 15 projection 400 mm with push-on rosette diameter 55 mm	chrome white/chrome matt black matt white matt black/chrome	6651405-00 6651491-00 6651439-00 6651453-00 6651487-00
	KLUDI A-QA shower arm DN 15 for head shower DN 15 projection 250 mm with push-on rosette diameter 55 mm	chrome	6651305-00
	KLUDI A-QA shower arm DN 15 for head shower DN 15 projection 400 mm with push-on rosette 61 x 61 mm	chrome white/chrome	6653405-00 6653491-00









HEAD SHOWERS

product	product description	surface	art. no.
 	KLUDI A-QA shower arm DN 15 for head shower DN 15 projection 250 mm with push-on rosette 61 x 61 mm	chrome	6653305-00
 	KLUDI A-QA shower arm DN 15 for head shower 1S and 3S without ball joint projection 130 mm	chrome	6235305-00
 	KLUDI 1926 shower arm DN 15 for head shower DN 15 projection 415 mm with push-on rosette diameter 55 mm	chrome gold plated 23 carat	2751405 2751445




HEAD SHOWERS

product	product description	surface	art. no.
Ceiling arms 	 KLUDI A-QA ceiling arm DN 15 for head shower DN 15 projection 150 mm with push-on rosette 58 x 58 mm	chrome	6654505-00
	 KLUDI A-QA ceiling arm DN 15 for head shower DN 15 projection 150 mm with push-on rosette diameter 55 mm	chrome white/chrome matt black matt black/chrome	6651505-00 6651591-00 6651539-00 6651587-00
			64 400 05
	 KLUDI A-QA ceiling arm DN 15 for head shower DN 15 projection 150 mm with push-on rosette 61 x 61 mm	chrome white/chrome	6653505-00 6653591-00



Shower hoses & accessories

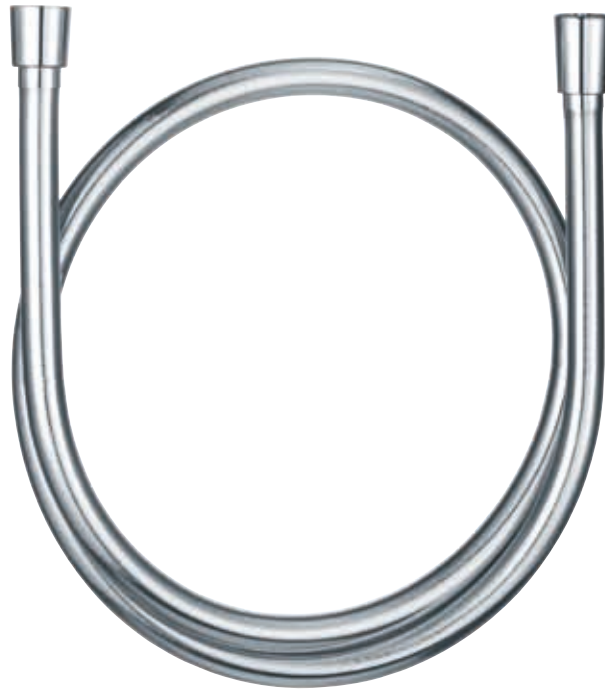

SHOWERS

Shower Dreams

FITTINGS

Shower Systems 148
Shower Duo 158
Hand showers 160

Shower sets & wall rails

Head showers

Shower hoses & accessories

166

182

194

WASTES

Washbasin and bidet wastes

202

Bath- and shower wastes

207












SHOWER HOSES & ACCESSORIES

product	product description	surface	art. no.
Shower hoses 	KLUDI SUPARAFLEX shower hose DN 15 plastic-coated with metal-effect with conical nuts both sides anti twist G 1/2 x G 1/2 x 1600 mm	chrome white/chrome matt black	6107205-00 6107291-00 6107239-00
	KLUDI SUPARAFLEX shower hose DN 15 plastic-coated with metal-effect with conical nuts both sides anti twist G 1/2 x G 1/2 x 1250 mm	chrome white/chrome matt black	6107105-00 6107191-00 6107139-00
	KLUDI LOGOFLEX shower hose DN 15 plastic-coated with metal-effect with conical nuts G 1/2 x G 1/2 x 1250 mm	chrome	6105505-00
	KLUDI LOGOFLEX shower hose DN 15 plastic-coated with metal-effect with conical nuts G 1/2 x G 1/2 x 1600 mm	chrome	6105605-00
	KLUDI LOGOFLEX shower hose DN 15 plastic-coated with metal-effect with conical nuts G 1/2 x G 1/2 x 2000 mm	chrome	6105705-00











SHOWER HOSES & ACCESSORIES

product	product description	surface	art. no.
shower hook 	KLUDI NOVA FONTE Puristic shower hook for hoses with conical nut with mounting material for rigid wall mounting 	chrome matt black matt white	2055205-15 2055239-15 2055253-15 NEW
	KLUDI NOVA FONTE Classic shower hook for hoses with conical nut with mounting material for rigid wall mounting 	chrome	2055205-25 NEW
	KLUDI NOVA FONTE Déco shower hook for hoses with conical nut with mounting material for rigid wall mounting 	chrome	2055205-35 NEW
	KLUDI FRESHLINE shower hook for hoses with conical nut with screws and dowels 	chrome	6455205-00
	KLUDI A-QA fixed wall shower hook for hoses with conical nut with screws and dowels 	chrome white	6555105-00 6555143-00



SHOWER HOSES & ACCESSORIES

product	product description	surface	art. no.
 	shower hook for hoses with conical nut with screws and dowels	chrome white	6305005-00 6305043-00
 	universal shower holder G 1/2 for assembling at shower connection for shower hoses with conical nut	chrome	6053905-00
 	shower hook G 1/2 with coupling	chrome	6053105-00
 	connection for shower G 3/4 with cradle hook	chrome	6053705-00














SHOWER HOSES & ACCESSORIES

product	product description	surface	art. no.
<p>Wall supply</p>  	<p>KLUDI NOVA FONTE Puristic wall supply DN 15 protected against back flow according to DIN EN 1717 connection G 1/2 for rigid wall mounting</p>	<p>chrome matt black matt white</p>	<p>2054305-15 2054339-15 2054353-15</p> <p>NEW</p>
 	<p>KLUDI NOVA FONTE Puristic wall supply DN 15 protected against back flow according to DIN EN 1717 connection G 1/2 for rigid wall mounting</p>	<p>chrome</p>	<p>2054305-25</p> <p>NEW</p>
 	<p>KLUDI NOVA FONTE Puristic wall supply DN 15 protected against back flow according to DIN EN 1717 connection G 1/2 for rigid wall mounting</p>	<p>chrome</p>	<p>2054305-35</p> <p>NEW</p>
 	<p>KLUDI A-QA wall supply DN 15 with wall-compensation ring</p>	<p>chrome</p>	<p>6554005-00</p>
 	<p>KLUDI A-QA wall supply DN 15 protected against back flow according to DIN EN 1717 with wall-compensation ring</p>	<p>chrome</p>	<p>6554305-00</p>







SHOWER HOSES & ACCESSORIES

product	product description	surface	art. no.
 	wall supply DN 15 with wall-compensation ring	chrome white matt black	6306005-00 6306043-00 6306039-00
 	wall supply DN 15 protected against back flow according to DIN EN 1717 with wall-compensation ring	chrome white matt black	6306105-00 6306143-00 6306139-00
 	wall supply DN 15 with wall flange (escutcheon)	chrome	6054005-00
 	KLUDI A-QA wall supply with shower holder DN 15 for hoses with conical nut shower outlet G 1/2 protected against back flow according to DIN EN 1717 with wall-compensation ring with mounting material	chrome	6556005-00
 	KLUDI A-QA wall supply with shower holder DN 15 with ceramic shut-off valve wall fastening for hoses with conical nut shower outlet G 1/2 protected against back flow in compliance with DIN EN 1717 with wall-compensation ring with mounting material	chrome 	6556205-00









SHOWER HOSES & ACCESSORIES

product	product description	surface	art. no.
		<p>wall supply with shower holder DN 15 wall fastening for hoses with conical nut shower outlet G 1/2 protected against back flow according to DIN EN 1717</p>	<p>chrome matt black</p> <p>6054705-00 6054739-00</p> <p>NEW</p>
		<p>KLUDI 1926 connection angle DN 15 Cover rosette Ø 56 mm</p>	<p>chrome gold plated 23 carat</p> <p>1210105-00 1210145-00</p>



SHOWER HOSES & ACCESSORIES

product	product description	surface	art. no.
Accessories 	 KLUDI A-QA i tile compensation washer for wall rail	chrome	93098905-00
	 KLUDI A-QA s tile compensation washer for wall rail	chrome	93099005-00
	 corner mounting set for wall rail two corner elements with screws and dowels for 6839005-00, 6839305-00, 6836005-00, 6836305-00, 6819005-00, 6816005-00, 6809005-00, 6806005-00, 6857605-00, 6857705-00 for 60850, 60840, 60830, 60740, 60730, 60640, 60630, 60620, 60610, 60576, 60577	chrome	6211905-00



Wastes



SHOWERS

Shower Dreams

FITTINGS

Shower Systems

148

Shower Duo

158

Hand showers

160

Shower sets & wall rails

166

Head showers

182

Shower hoses & accessories

194

WASTES

Washbasin and bidet wastes

202

Bath- and shower wastes

207



WASHBASIN AND BIDET WASTES

product	product description	surface	art. no.
Basin 	 <p>PUSH-OPEN waste G 1 1/4 lockable plug G 1 1/4 for wash basin with overflow waste flow rate >32 l/min overflow capacity approx 20 l/min</p>	chrome	1042405-00
	 <p>KLUDI PUSH-OPEN waste G 1 1/4 lockable plug G 1 1/4 for wash basin with overflow</p>	chrome matt black	1042605-00 1042639-00
	 <p>KLUDI shank valve with waste cap G 1 1/4 for wash basin without overflow not lockable</p>	chrome	1042805-00
	 <p>shank valve G 1 1/4 with overflow without ball chain and chainholder</p>	chrome	1042705-00
	 <p>universal plug-valve G 1 1/4 valve sieve made of chrome Ø 63 mm thread sub-frame plastic white with ball chain and holder</p>	chromium nickel steel	1140235-00



WASHBASIN AND BIDET WASTES

product	product description	surface	art. no.
 	universal plug-valve G 1 1/4 valve sieve made of chrome Ø 63 mm thread sub-frame brass nickel-plated	chromium nickel steel	1041135-00
 	design-bow lever G 1 1/4 G 1 1/4 x 32 mm with discharge-tube Ø 32 x 290 mm with push-on rosette diameter 65 mm adjustable drain pipe up to 120 mm with locker for cleaning according to DIN EN 274	chrome matt black	1002005-00 1002039-00
 	bottle trap G 1 1/4 G 1 1/4 x 32 mm with discharge-tube Ø 32 x 200 mm with wall flange (escutcheon) Ø 65 mm according to DIN EN 274	chrome	1010505-00
 	P-trap G 1 1/4 G 1 1/4 x 32 mm, standard model with bent outlet Ø 32 x 200 mm with wall flange (escutcheon) Ø 65 mm according to DIN EN 274	chrome	1025005-00
 	P-trap G 1 1/4 G 1 1/4 x 32 mm adjustable drain pipe up to 120 mm with bent outlet Ø 32 x 220 mm with wall flange (escutcheon) Ø 80 mm according to DIN EN 274	chrome	1026505-00













WASHBASIN AND BIDET WASTES

product	product description	surface	art. no.
 	KLUDI place-saving bottle trap with wall flange (escutcheon) Ø 65 mm with bent outlet Ø 32 mm according to DIN EN 274 G 1 1/4 x 32 mm	chrome	1025505-00
Bidet  	bidet P - trap G 1 1/4 x 32 mm with bent outlet Ø 32 x 200 mm with wall flange (escutcheon) Ø 65 mm according to DIN EN 274	chrome	1031105-00
Accessories  	pipe coupling with 2 threads for tube connection with 32 mm diameter	chrome	1043205-00
 	adjustable tube hose thread G 3/4 for connection of the drain hose from washing machines G 1 1/4 x 200 mm	chrome	1046205-00
 	extension tube with o-ring for extension of adjustable and outlet pipes Ø 32 x 125 mm	chrome	1049905-00


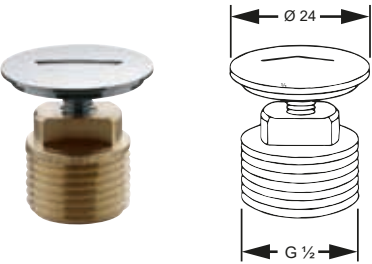


WASHBASIN AND BIDET WASTES

product	product description	surface	art. no.
 	outlet tube straight with flanged rim Ø 32 x 200 mm	chrome	84501605-00
 	outlet tube straight with flanged rim 32 x 250 mm	chrome	84506605-00
 	outlet tube straight with flanged rim Ø 32 x 300 mm	chrome	84502505-00
 	outlet tube straight without edged flange Ø 32 x 300 mm	chrome	84514605-00
 	floor tube 90° DN 32 G 1 1/4 x 220 x 680 mm	chrome	84500805-00



WASHBASIN AND BIDET WASTES

product	product description	surface	art. no.
	tap rosette G 1/2 height 5 mm	chromium nickel steel	82027235-00
	Plug G 1/2 to seal connections not in use involved with rosette	chrome	7034605-00













BATH- AND SHOWER WASTES

product	product description	surface	art. no.
Bath 	KLUDI ROTEXA MULTI filling, waste and overflow trim set flow class C s-pointer aerator M 24 x 1 filling unit with fastening screws and plug with big valve disc noise level I	chrome	7182605-00
	KLUDI ROTEXA MULTI bath filling, waste and overflow set G 1 1/2 pre-installation set for water intake connection G 1/2 incl. sink-kit with attached bottle-trap 2 swivel-joints 50 mm water seal height without trim set with DN 40/50 connector with Excenter set noise level I approved acc. to DIN 19545	neutral	2131500-00
	Nirosta-pressure hose G 1/2 x G 1/2 x 600 mm for KLUDI ROTEXA MULTI hot water resistant	neutral	6115000-00
	KLUDI ROTEXA 2000 pop-up and overflow set G 1 1/2 with bowden cable for bath- and deep showertubs with attached bottle-trap 2 swivel-joints 50 mm water seal height with trim set with DN 40/50 connector with Excenter set	chrome	2140605-00
	KLUDI ROTEXA 2000 pop-up and overflow set G 1 1/2 with bottle trap with bowden cable with flexible overflow tube for fitted dimensions up to 450 mm with valve - head part	chrome	2130005N-00











BATH- AND SHOWER WASTES

product	product description	surface	art. no.
	 <p>KLUDI ROTEXA 2000 pop-up and overflow set G 1 1/2 with bowden cable for bath- and deep showertubs with flexible overflow tube with attached bottle-trap 2 swivel-joints 50 mm water seal height without connector with trim set with Excenter set</p>	chrome	2140705-00
	 <p>KLUDI ROTEXA 2000 pop-up and overflow set G 1 1/2 with solvable bottle trap with bowden cable for bathtubs and deep showertubs for fitted dimensions up to 450 mm with valve - head part 2 swivel-joints with flexible overflow tube approved acc. to DIN EN 274 without connector with trim set waste hole diameter Ø 52 mm with Excenter set</p>	chrome	2140805-00
	 <p>KLUDI ROTEXA 2000 pop-up and overflow set G 1 1/2 bowden cable 850 mm long with flexible overflow tube 760 mm for special tubs with attached bottle-trap 2 swivel-joints with valve - head part without connector with trim set with Excenter set</p>	chrome	2140905-00
	 <p>KLUDI pop-up and overflow set trim set rosette plate and plug with big valve disc</p>	chrome	7108005-00
	 <p>KLUDI ROTEXA 2000 pop-up and overflow set G 1 1/2 pre-installation set with bowden cable for bathtubs and deep showertubs with attached bottle-trap 2 swivel-joints 50 mm water seal height according to DIN EN 274 with DN 40/50 connector without trim set with Excenter set</p>	neutral	2108000-00



BATH- AND SHOWER WASTES

product	product description	surface	art. no.
Shower 	KLUDI TASSO 90 pop-up waste trim set according to DIN EN 274 approved according to LGA-Bayern	chrome	7137005-00
			
	KLUDI TASSO 90 pop-up waste for flat shower tubs with 90 mm waste hole diameter with removable bottle trap cleanable approved acc. to DIN 19545/274 approved according to LGA-Bayern	neutral	2109100-00
			
	KLUDI TASSO 50 pop-up wastes for pre-installation trim set according to DIN EN 274 approved according to LGA-Bayern	chrome	7152005-00
			
	KLUDI TASSO 50 pop-up waste for flat shower tubs waste hole diameter Ø 52 mm with removable bottle trap according to DIN EN 274 approved according to LGA-Bayern	neutral	2152000-00
			





M-LINE



Kitchen | M-LINE

KITCHEN

Kitchen Competence

FITTINGS

M-LINE

MIX	212
M2	215
STEEL	216
MX	217
ZENTA	219
OBJEKTA	220
SCOPE	222
LOGO NEO	223
STANDARD	224

L-LINE











E-GO	228
L STEEL	229
L-INE	230
L-INE S	231

C-LINE

E-GO	234
BINGO STAR	235
BINGO STAR XS	238



KLUDI MIX

product	product description	surface	art. no.
<p>Sink</p>  	<p>KLUDI MIX single lever sink mixer DN 15 open ring lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 12 l/min at 3 bar swivelling spout (360°) with shank fastening flexible hoses G 3/8</p>	<p>chrome</p> <p>DO IT</p> <p>FIX IT</p>	329040562
 	<p>KLUDI MIX single lever sink mixer DN 15 solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 12 l/min at 3 bar swivelling spout (360°) with shank fastening flexible hoses G 3/8</p>	<p>chrome matt black</p> <p>DO IT</p> <p>FIX IT</p>	329040575 329043975
 	<p>KLUDI MIX multi single lever sink mixer DN 15 open ring lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 12 l/min at 3 bar swivelling spout (360°) one connection for washing machine or dishwasher with shank fastening flexible hoses G 3/8</p>	<p>chrome</p> <p>DO IT</p> <p>FIX IT</p>	329060562
 	<p>KLUDI MIX multi single lever sink mixer DN 15 solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 12 l/min at 3 bar swivelling spout (360°) one connection for washing machine or dishwasher with shank fastening flexible hoses G 3/8</p>	<p>chrome matt black</p> <p>DO IT</p> <p>FIX IT</p>	329060575 329063975
 	<p>KLUDI MIX single lever sink mixer bayonette DN 15 open ring lever single hole mounted flow rate 9 l/min at 3 bar flow regulator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) for installation beneath windows remaining socket height: 25 mm with shank fastening flexible hoses G 3/8</p>	<p>chrome</p> <p>DO IT</p> <p>FIX IT</p>	329340562







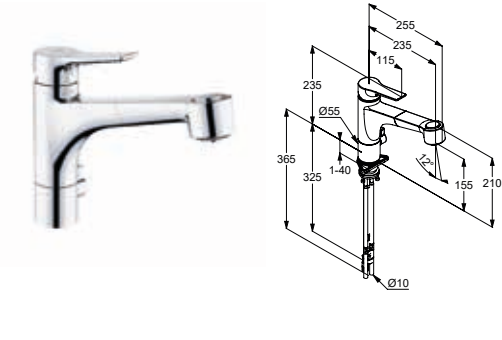




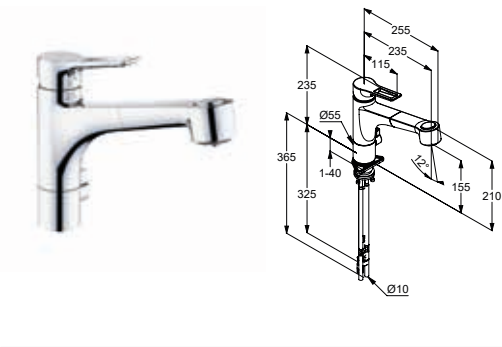


KLUDI MIX

product	product description	surface	art. no.
		<p>KLUDI MIX single lever sink mixer bayonette DN 15 solid lever single hole mounted flow rate 9 l/min at 3 bar flow regulator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) for installation beneath windows remaining socket height: 25 mm with shank fastening flexible hoses G 3/8</p>	<p>chrome</p> <p>329340575</p> <p></p> <p></p> <p></p>
		<p>KLUDI MIX single lever sink mixer DN 15 open ring lever single hole mounted flow rate 9 l/min at 3 bar flow regulator M 24 x 1 ceramic cartridge with hot water limitation swivelling (110°) pull-out spout with quick coupling protected against back flow with shank fastening flexible hoses G 3/8</p>	<p>chrome</p> <p>329430562</p> <p></p> <p></p> <p></p> <p></p> <p></p>
		<p>KLUDI MIX single lever sink mixer DN 15 solid lever single hole mounted flow rate 9 l/min at 3 bar flow regulator M 24 x 1 ceramic cartridge with hot water limitation swivelling (110°) pull-out spout with quick coupling protected against back flow with shank fastening flexible hoses G 3/8</p>	<p>chrome matt black</p> <p>329430575 329433975</p> <p></p> <p></p> <p></p> <p></p> <p></p>
		<p>KLUDI MIX single lever sink mixer DN 15 open ring lever single hole mounted flow regulator M 24 x 1 flow rate 9 l/min at 3 bar ceramic cartridge with hot water limitation swivelling spout (110°) pull-out hand spray automatic diverter: shower/spray with quick coupling protected against back flow with shank fastening flexible hoses G 3/8</p>	<p>chrome</p> <p>329410562</p> <p></p> <p></p> <p></p> <p></p> <p></p>
		<p>KLUDI MIX single lever sink mixer DN 15 solid lever single hole mounted flow regulator M 24 x 1 flow rate 9 l/min at 3 bar ceramic cartridge with hot water limitation swivelling spout (110°) pull-out hand spray automatic diverter: shower/spray with quick coupling protected against back flow with shank fastening flexible hoses G 3/8</p>	<p>chrome matt black</p> <p>329410575 329413975</p> <p></p> <p></p> <p></p> <p></p> <p></p>



KLUDI MIX


product	product description	surface	art. no.
	<p>KLUDI MIX multi single lever sink mixer DN 15 open ring lever flow regulator M 24 x 1 flow rate 9 l/min at 3 bar ceramic cartridge with hot water limitation swivelling spout (110°) pull-out hand spray automatic diverter: shower/spray with quick coupling one connection for washing machine or dishwasher protected against back flow with shank fastening copper tubes 10 mm</p>	chrome     	329450562
	<p>KLUDI MIX multi single lever sink mixer DN 15 solid lever flow regulator M 24 x 1 flow rate 9 l/min at 3 bar ceramic cartridge with hot water limitation swivelling spout (110°) pull-out hand spray automatic diverter: shower/spray with quick coupling one connection for washing machine or dishwasher protected against back flow with shank fastening copper tubes 10 mm</p>	chrome     	329450575



KLUDI STEEL

product

Sink



product description

KLUDI STEEL
single lever sink mixer DN 15
solid lever
material: stainless steel
single hole mounted
flow regulator M 24 x 1
flow rate 12 l/min at 3 bar
ceramic cartridge
swivelling spout (360°)
flexible hoses G 3/8
with shank fastening
PA-IX 17500/IO


surface

stainless steel
brushed



art. no.

44850F860

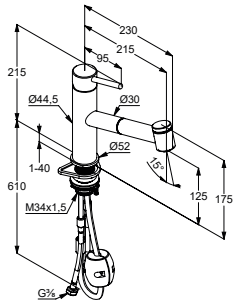

KLUDI STEEL

single lever sink mixer DN 15

solid lever
material: stainless steel
single hole mounted
flow regulator M 18 x 1
ceramic cartridge
flow rate 8 l/min at 3 bar
swivelling spout (110°)
with pull-out hand spray
automatic diverter: shower/spray
protected against back flow
flexible hoses G 3/8
with shank fastening
P-IX 17501/IO

stainless steel
brushed



44851F860



KLUDI MX

product	product description	surface	art. no.
<p>Sink</p>	<p>KLUDI MX single lever sink mixer DN 15 open ring lever single hole mounted flow rate 9,5 l/min at 3 bar cascade aerator M 24 x 1A ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 P-IX 18638/IA</p>	chrome	399040562
	<p>KLUDI MX multi single lever sink mixer DN 15 open ring lever single hole mounted flow rate 9,5 l/min at 3 bar cascade aerator M 24 x 1A ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set one connection for washing machine or dishwasher flexible hoses G 3/8 PA-IX 18645/IA</p>	chrome 	399060562
	<p>KLUDI MX single lever sink mixer bayonette DN 15 open ring lever single hole mounted flow rate 9,5 l/min at 3 bar cascade aerator M 24 x 1A ceramic cartridge with hot water limitation swivelling spout (360°) with shank fastening for installation beneath windows remaining socket height: 25 mm flexible hoses G 3/8 P-IX 18638/IA</p>	chrome 	399340562
	<p>KLUDI MX single lever sink mixer DN 15 open ring lever single hole mounted flow rate 8,5 l/min at 3 bar s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (110°) pull-out hand spray automatic diverter: shower/spray protected against back flow copper tubes 10 mm P-IX 18643/IAO</p>	chrome 	399410562
	<p>KLUDI MX multi single lever sink mixer DN 15 open ring lever single hole mounted flow rate 8,5 l/min at 3 bar s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (110°) pull-out hand spray automatic diverter: shower/spray one connection for washing machine or dishwasher protected against back flow copper tubes 10 mm PA-IX 18642/IAO</p>	chrome 	399450562






KLUDI MX




product	product description	surface	art. no.
Spare parts	KLUDI kitchen showers automatic diverter: shower/spray s-pointer aerator M 24 x 1 flow class A for 33941, 33945, 39941, 39945	chrome	7403005-00














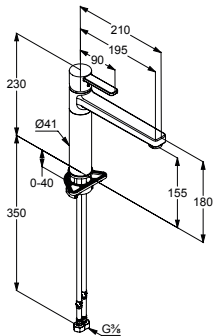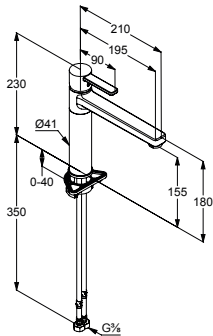









KLUDI ZENTA

product	product description	surface	art. no.
Sink 	KLUDI ZENTA single lever sink mixer DN 15 solid lever single hole mounted flow rate 11 l/min at 3 bar aerator M 24 x 1 ceramic cartridge swivelling spout (360°) flexible hoses G 3/8 noise level I	chrome	389730575
	KLUDI ZENTA single lever sink mixer DN 15 solid lever single hole mounted flow rate 3,8 l/min at 3 bar aerator M 24 x 1 ceramic cartridge swivelling spout (360°) flexible hoses G 3/8 noise level I	chrome	389730575WR5
Spare parts 	KLUDI ZENTA spacer escutcheon for base for KLUDI ZENTA for 38973, 38979	chrome	92069905-00





KLUDI OBJEKTA

product	product description	surface	art. no.
Sink  	KLUDI OBJEKTA single lever sink mixer DN 15 solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 13,3 l/min at 3 bar swivelling spout (360°) flexible hoses G 3/8 rapid installation set	chrome	325740575
 	KLUDI OBJEKTA multi single lever sink mixer DN 15 solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 13,3 l/min at 3 bar swivelling spout (360°) one connection for washing machine or dishwasher rapid installation set flexible hoses G 3/8	chrome 	325760575
 	KLUDI OBJEKTA single lever sink mixer bayonette DN 15 solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 13,3 l/min at 3 bar swivelling spout (360°) for installation beneath windows remaining socket height: 25 mm with shank fastening flexible hoses G 3/8	chrome   	325780575
 	KLUDI OBJEKTA single lever sink mixer DN 15 solid lever single hole mounted ceramic cartridge with hot water limitation s-pointer aerator M 24 x 1 Flow rate shower 8.2 / jet 9.0 l / min at 3.0 bar swivelling (110°), pull-out hand shower automatic diverter: shower/spray protected against back flow flexible hoses G 3/8 with shank fastening	chrome     	325810575
 	KLUDI OBJEKTA wall mounted single lever sink mixer DN 15 solid lever wall fastening flow 13 l/min at 3 bar cascade aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling or lockable spout Projection 115 mm s-connections	chrome	328810575




KLUDI OBJEKTA

product

product description

surface

art. no.

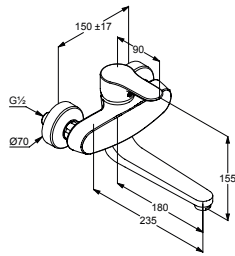

KLUDI OBJEKTA
wall mounted single lever sink mixer DN 15
solid lever
wall fastening
flow rate 12 l/min at 3 bar
cascade aerator M 24 x 1
ceramic cartridge with hot water limitation
swivelling or lockable spout
projection 180 mm
s-connections

chrome

328820575







KLUDI SCOPE

product	product description	surface	art. no.
<p>Sink</p>	<p>KLUDI SCOPE single lever sink mixer DN 15 solid lever single hole mounted flow 13 l/min at 3 bar caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 noise level I P-IX 19449/10</p>	chrome	339330575
	<p>KLUDI SCOPE XL single lever sink mixer DN 15 solid lever single hole mounted flow 13 l/min at 3 bar caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 noise level I P-IX 19449/10</p>	chrome	339300575
	<p>KLUDI SCOPE single lever sink mixer bayonette DN 15 solid lever single hole mounted flow 13 l/min at 3 bar caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) for installation beneath windows remaining socket height: 25 mm flexible hoses G 3/8 noise level I P-IX 19449/10</p>	chrome	339380575
	<p>KLUDI SCOPE single lever sink mixer DN 15 solid lever single hole mounted flow rate 12,2 l/min at 3 bar aerator M 22 x 1 ceramic cartridge with hot water limitation swivelling (110°) pull-out spout protected against back flow with shank fastening copper tubes 10 mm noise level I</p>	chrome	339310575
<p>Spare parts</p>	<p>KLUDI SCOPE spout</p>	chrome	7501005-00








KLUDI LOGO NEO

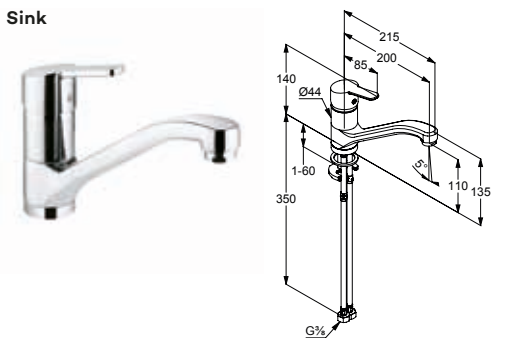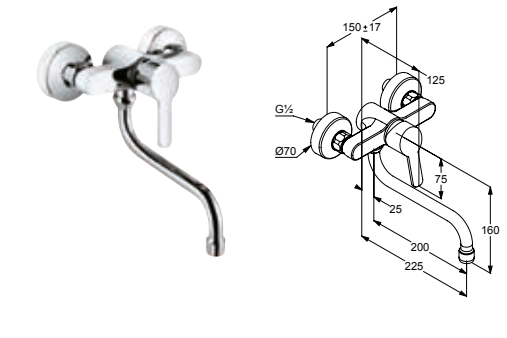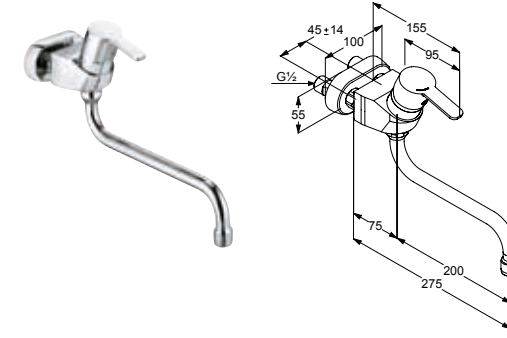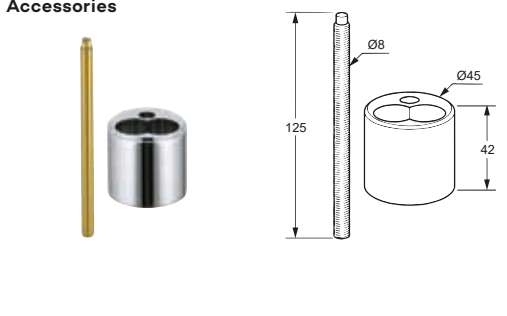product	product description	surface	art. no.
<p>Sink</p> 	<p>KLUDI LOGO NEO single lever sink mixer DN 15 solid lever single hole mounted flow rate 12 l/min at 3 bar aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 noise level I PA-IX 7526/IA</p>	chrome	379130575
	<p>KLUDI LOGO NEO wall mounted single lever sink mixer DN 15 solid lever wall fastening flow rate 12 l/min at 3 bar aerator M 22 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) G 3/4 x 200 mm s-connections noise level I</p>	chrome	379240575
	<p>KLUDI LOGO NEO wall mounted single lever sink mixer DN 15 solid lever wall fastening distance from center to center 45 mm flow class A aerator M 22 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) 200 mm s-connections G 1/2 x G 1/2 noise level I</p>	chrome	379140575
<p>Accessories</p> 	<p>extension for single lever sink mixer 389130575/389190575</p>	chrome	7676005-00










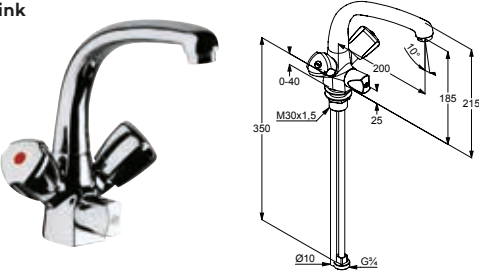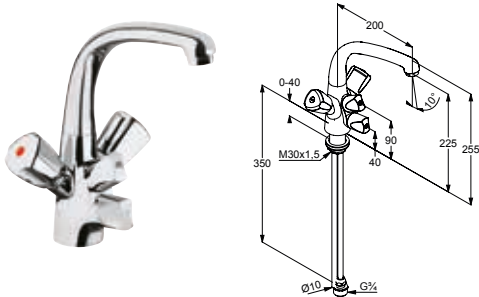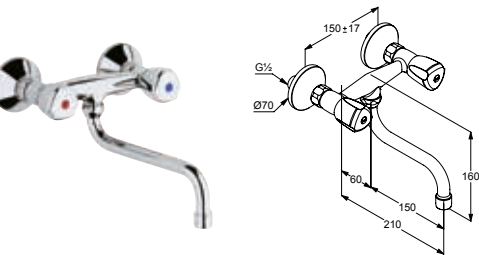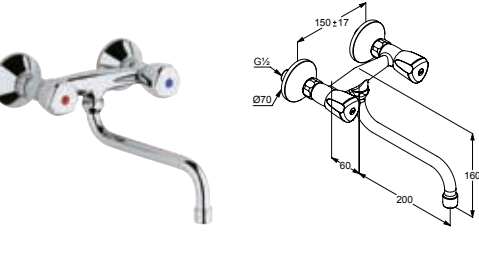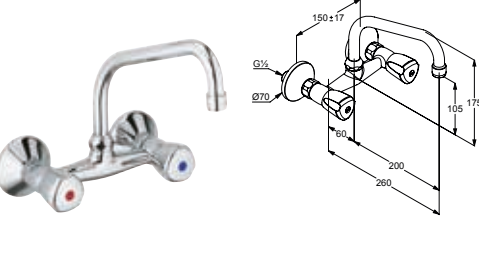KLUDI STANDARD

product	product description	surface	art. no.
<p>Sink</p> 	<p>KLUDI STANDARD multi sink mixer DN 15 single hole mounted flow class A swivelling casted spout (360°) aerator M 24 x 1 one connection for washing machine or dishwasher copper tubes 10 mm PA-IX 3102/IA handle 15 = handle Terralux plastic</p>	chrome	317100515
	<p>KLUDI STANDARD multi sink mixer DN 15 single hole mounted flow class A swivelling casted spout (360°) aerator M 24 x 1 two connections for washing machine and dishwasher copper tubes 10 mm PA-IX 3664/IA DIN-DVGW-AT-2177 handle 15 = handle Terralux plastic</p>	chrome	317110515
	<p>KLUDI STANDARD wall mounted sink mixer DN 15 wall fastening flow class A swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 s-connections P-IX 1936/IA handle 08 = handle Terralux metal handle 15 = handle Terralux plastic</p>	chrome chrome	310520508 310520515
	<p>KLUDI STANDARD wall mounted sink mixer DN 15 wall fastening flow class A swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 s-connections P-IX 1936/IA DIN-DVGW-AT-2177 handle 08 = handle Terralux metal handle 15 = handle Terralux plastic</p>	chrome chrome	310530508 310530515
	<p>KLUDI STANDARD wall mounted sink mixer DN 15 wall fastening flow class A swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 s-connections P-IX 1936/IA DIN-DVGW-AT-2177 handle 08 = handle Terralux metal</p>	chrome	310550508




KLUDI STANDARD

product	product description	surface	art. no.
 	special wall mounted sink mixer DN 15 wall fastening swivelling tube spout (360°) distance from center to center 45 mm flow class A aerator M 22 x 1 P-IX 4085/IIA handle 15 = handle Terralux plastic	chrome	314530515
 	KLUDI STANDARD sink swivelling valve DN 15 wall fastening flow class A swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 marking: blue/red PA-IX 2524/IA handle 15 = handle Terralux plastic	chrome	304050515
 	KLUDI STANDARD bibcock DN 15 flow class A aerator M 22 x 1 marking: blue/red P-IX 2585/IA handle 15 = handle Terralux plastic	chrome	300150515
Spare parts  	KLUDI STANDARD handle 08 handle Terralux metal marking: blue	chrome	7542105-00
 	KLUDI STANDARD handle 08 handle Terralux metal marking: red	chrome	7542205-00



KLUDI STANDARD

product	product description	surface	art. no.
 	KLUDI STANDARD handle 15 handle Terralux plastic marking: blue	chrome	7636005-00
 	KLUDI STANDARD handle 15 handle Terralux plastic marking: red	chrome	7636105-00
	Swivelling casted spout with grub screw fixing projection 200 mm aerator M 24 x 1/1A for Standard Multi mixer	chrome	7540705-00
	Swivelling casted spout with grub screw fixing projection 200 mm with flow aerator M 24 x 1/ND for Standard Multi mixer for low pressure mixer	chrome	7540805-00



L-LINE



Kitchen | L-LINE

KITCHEN

Kitchen Competence

FITTINGS

M-LINE

MIX	212
M2	215
STEEL	216
MX	217
ZENTA	219
OBJEKTA	220
SCOPE	222
LOGO NEO	223
STANDARD	224

L-LINE

E-GO	228
L STEEL	229
L-INE	230
L-INE S	231

C-LINE


E-GO	234
BINGO STAR	235
BINGO STAR XS	238



KLUDI E-GO

product

Sink

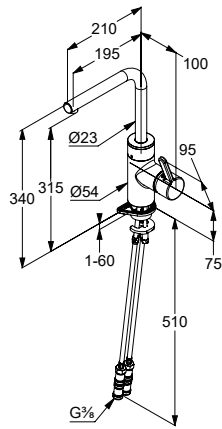

product description


KLUDI E-GO
electronic controlled single lever sink mixer DN 15
 solid lever
 single hole mounted
 PCA caché-aerator M 16,5 x 1
 ceramic cartridge with hot water limitation
 Flow rate manual operation 10,5 l/min at 3 bar
 Flow rate electronic release approx. 4,5 l/min at 3 bar
 adjustable temperature through lever setting
 optical object-detection
 automatic initial sensor measurement
 electric power supply via 230 V main adapter
 with magnet-cartridge-valve
 swivelling spout (360°)
 backflow preventer with dirt trap screens
 with optional hygienic flushing every 12 or 24 hours
 rapid installation set
 flexible hoses G 3/8
 noise level I

surface

chrome
deep matt black

art. no.

422200575
422206675

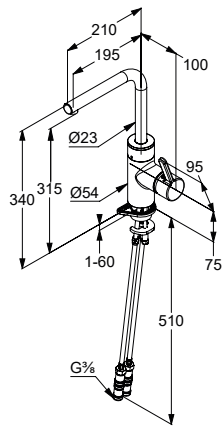

KLUDI E-GO
electronic controlled single lever sink mixer DN 15
 solid lever
 single hole mounted
 PCA caché-aerator M 16,5 x 1
 ceramic cartridge with hot water limitation
 Flow rate manual operation 10,5 l/min at 3 bar
 Flow rate electronic release approx. 4,5 l/min at 3 bar
 adjustable temperature through lever setting
 optical object-detection
 automatic initial sensor measurement
 electronic unit with battery control device
 6 V lithium battery CR-P2
 with magnet-cartridge-valve
 swivelling spout (360°)
 backflow preventer with dirt trap screens
 with optional hygienic flushing every 12 or 24 hours
 rapid installation set
 flexible hoses G 3/8
 noise level I

chrome
deep matt black

422300575
422306675





KLUDI L STEEL


product

product description

surface

art. no.

Sink




KLUDI L STEEL single lever sink mixer DN 15

solid lever
 material: stainless steel
 single hole mounted
 ceramic cartridge
 flow regulator M 18 x 1
 flow rate 9 l/min at 3 bar
 swivelling spout (360°)
 flexible hoses G 3/8
 with shank fastening

stainless steel
 brushed

45803F877



KLUDI L STEEL single lever sink mixer DN 15

swivelling (180°) pull-out spout
 solid lever
 material: stainless steel
 single hole mounted
 ceramic cartridge
 flow regulator M 18 x 1
 flow rate 8 l/min at 3 bar
 swivelling (180°) pull-out spout
 protected against back flow
 flexible hoses G 3/8
 with shank fastening








stainless steel
 brushed

45851F877





KLUDI L-INE

product	product description	surface	art. no.
<p>Sink</p> 		<p>chrome matt black</p> 	<p>428140577 428143977</p>
		<p>chrome</p>  	<p>428160577</p>
		<p>chrome</p>    	<p>428170577</p>
		<p>chrome</p>    	<p>428210577</p>
		<p>chrome</p>    	<p>428210577WR5</p>



KLUDI L-INE S


product

product description

surface

art. no.


Sink

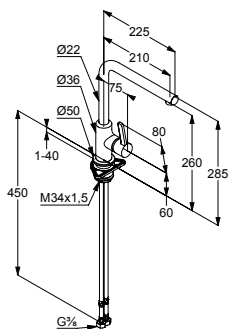

KLUDI L-INE S
single lever sink mixer DN 15
 single hole mounted
 solid lever
 ceramic cartridge
 Laminar-flow regulator M 18 x 1
 flow rate 7,1 l/min at 3 bar
 swivelling spout (360°)
 flexible hoses G 3/8
 with shank fastening

chrome
matt black


408030575
408033975

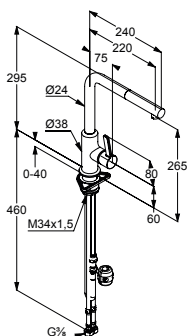

KLUDI L-INE S
single lever sink mixer DN 15
 solid lever
 single hole mounted
 ceramic cartridge
 flow regulator M 16 x 1
 flow rate 8,2 l/min at 3 bar
 swivelling (360°) pull-out spout
 protected against back flow
 flexible hoses G 3/8
 with shank fastening

chrome
matt black
matt black/chrome
matt white/chrome

408510575
408513975
408518775
408519375



KLUDI L-INE S
single lever sink mixer DN 15
 solid lever
 single hole mounted
 ceramic cartridge
 flow regulator M 16 x 1
 flow rate 3,8 l/min at 3 bar
 swivelling (360°) pull-out spout
 protected against back flow
 flexible hoses G 3/8
 with shank fastening

chrome
matt black/chrome

408510575WR5
408518775WR5







C-LINE



Kitchen | C-LINE

KITCHEN

Kitchen Competence

FITTINGS

M-LINE

MIX	212
M2	215
STEEL	216
MX	217
ZENTA	219
OBJEKTA	220
SCOPE	222
LOGO NEO	223
STANDARD	224

L-LINE

E-GO	228
L STEEL	229
L-INE	230
L-INE S	231

C-LINE


E-GO	234
BINGO STAR	235
BINGO STAR XS	238



KLUDI E-GO

product

Sink

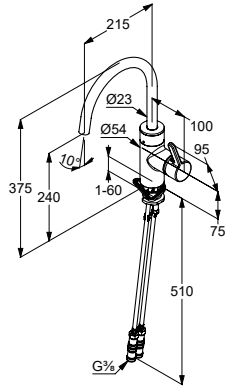

product description


KLUDI E-GO
electronic controlled single lever sink mixer DN 15
solid lever
single hole mounted
caché-aerator M 21,5 x 1
ceramic cartridge with hot water limitation
Flow rate manual operation 10,5 l/min at 3 bar
Flow rate electronic release approx. 4,5 l/min at 3 bar
adjustable temperature through lever setting
optical object-detection
automatic initial sensor measurement
electric power supply via 230 V main adapter
with magnet-cartridge-valve
swivelling spout (360°)
backflow preventer with dirt trap screens
with optional hygienic flushing every 12 or 24 hours
rapid installation set
flexible hoses G 3/8
noise level I

surface

chrome
deep matt black

art. no.

42200575
42200675



KLUDI E-GO
electronic controlled single lever sink mixer DN 15
solid lever
single hole mounted
caché-aerator M 21,5 x 1
ceramic cartridge with hot water limitation
Flow rate manual operation 10,5 l/min at 3 bar
Flow rate electronic release approx. 4,5 l/min at 3 bar
adjustable temperature through lever setting
optical object-detection
automatic initial sensor measurement
electronic unit with battery control device
6 V lithium battery CR-P2
with magnet-cartridge-valve
swivelling spout (360°)
backflow preventer with dirt trap screens
with optional hygienic flushing every 12 or 24 hours
rapid installation set
flexible hoses G 3/8
noise level I

chrome
deep matt black

42210575
42210675


















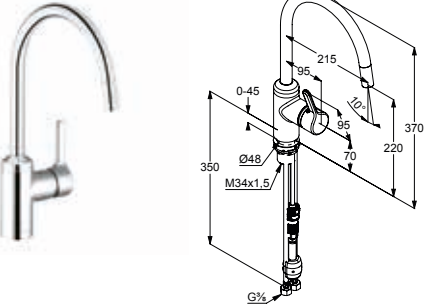




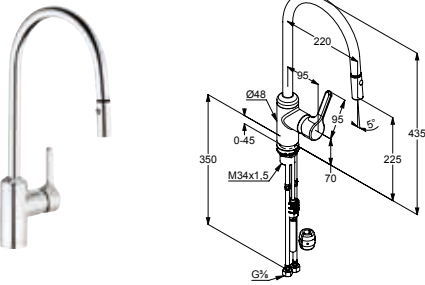



KLUDI BINGO STAR

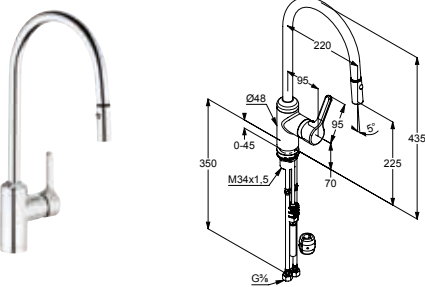product	product description	surface	art. no.
<p>Sink</p>	<p>KLUDI BINGO STAR single lever sink mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA caché-Laminar-flow regulator M 16,5 x 1 flow rate 7,6 l/min at 3 bar swivelling spout (360°) rapid installation set flexible hoses G 3/8 P-IX 9772/IO</p>	<p>chrome matt black stainless steel look</p>	<p>428030578 428033978 428039678</p>
	<p>KLUDI BINGO STAR single lever sink mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA caché-Laminar-flow regulator M 16,5 x 1 flow rate 3,8 l/min at 3 bar swivelling spout (360°) rapid installation set flexible hoses G 3/8 P-IX 9772/IO</p>	<p>chrome</p>	<p>428030578WR5</p>
	<p>KLUDI BINGO STAR multi single lever sink mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA caché-Laminar-flow regulator M 16,5 x 1 flow rate 7,6 l/min at 3 bar swivelling spout (360°) one connection for washing machine or dish-washer rapid installation set flexible hoses G 3/8</p>	<p>chrome</p>	<p>428360578</p>
	<p>KLUDI BINGO STAR single lever sink mixer bayonette DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA caché-Laminar-flow regulator M 16,5 x 1 flow rate 7,6 l/min at 3 bar swivelling spout (360°) flexible hoses G 3/8 for installation beneath windows remaining socket height: 25 mm</p>	<p>chrome stainless steel look</p>	<p>428570578 428579678</p>
	<p>KLUDI BINGO STAR single lever sink mixer DN 15 solid lever single hole mounted flow rate 12 l/min at 3 bar PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling (230°) pull-out spout flexible hoses G 3/8 protected against back flow</p>	<p>chrome matt black stainless steel look</p>	<p>428510578 428513978 428519678</p>

Kitchen | L-LINE

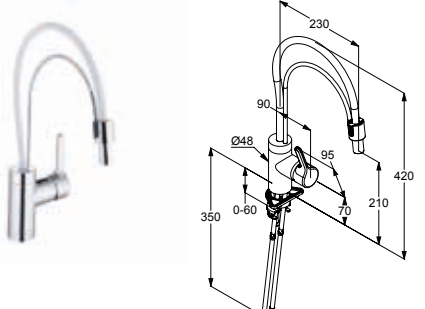

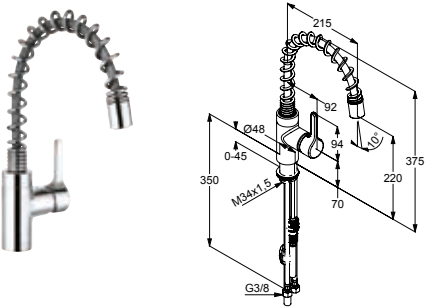
KLUDI BINGO STAR

product	product description	surface	art. no.
	<p>KLUDI BINGO STAR single lever sink mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation PCA caché-Laminar-flow regulator M 16,5 x 1 flow rate 3,8 l/min at 3 bar swivelling (230°) pull-out spout flexible hoses G 3/8 protected against back flow</p>	<p>chrome</p> <ul style="list-style-type: none">     	<p>428510578WR5</p>
	<p>KLUDI BINGO STAR single lever sink mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow rate 7,7 l/min at 3 bar pull-out hand spray automatic diverter: shower/spray swivelling spout (230°) with shank fastening flexible hoses G 3/8 protected against back flow</p>	<p>chrome</p> <ul style="list-style-type: none">     	<p>428520578</p>
	<p>KLUDI BINGO STAR single lever sink mixer DN 15 single hole mounted solid lever ceramic cartridge with hot water limitation flow rate 5 l/min. at 3 bar pull-out hand spray automatic diverter: shower/spray swivelling spout (230°) with shank fastening flexible hoses G 3/8 protected against back flow</p>	<p>chrome</p> <ul style="list-style-type: none">     	<p>428520578WR5</p>
	<p>KLUDI BINGO STAR single lever sink mixer DN 15 solid lever single hole mounted flow rate 8 l/min at 3 bar PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) removable mouthpiece protected against back flow rapid installation set flexible hoses G 3/8 noise level I</p>	<p>chrome</p> <ul style="list-style-type: none">   	<p>428590578</p>
	<p>KLUDI BINGO STAR 200 single lever sink mixer DN 15 semi-profi version single hole mounted solid lever ceramic cartridge with hot water limitation cascade aerator M 24 x 1 flow rate 9,4 l/min at 3 bar swivelling (220°) pull-out spout flexible hoses G 3/8 protected against back flow</p>	<p>chrome</p> <ul style="list-style-type: none">    	<p>428550578</p>



KLUDI BINGO STAR

product



product description

KLUDI BINGO STAR 200
single lever sink mixer DN 15
semi-profi version
single hole mounted
solid lever
ceramic cartridge with hot water limitation
cascade aerator M 24 x 1
flow rate 3,8 l/min at 3 bar
swivelling (220°) pull-out spout
flexible hoses G 3/8
protected against back flow

surface

chrome



art. no.

428550578WR5



Hospital & Care



Hospital & Care

HOSPITAL & CARE

MEDI CARE

240



KLUDI MEDI CARE

product	product description	surface	art. no.
<p>Sink</p>	<p>KLUDI MEDI CARE single lever sink mixer DN 15 clinic lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout projection 200 mm rapid installation set copper tubes 10 mm P-IX 9572/IIZ spout height lower edge 125 mm</p>	chrome 	349080524
	<p>KLUDI MEDI CARE single lever sink mixer DN 15 care lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout projection 200 mm rapid installation set copper tubes 10 mm P-IX 9572/IIZ spout height lower edge 125 mm</p>	chrome 	349080534
<p>Basin</p>	<p>KLUDI MEDI CARE single lever basin mixer DN 15 clinic lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation pop-up waste G 1 1/4 rapid installation set fixed spout copper tubes 10 mm P-IX 9571/IIZ spout height lower edge 95 mm</p>	chrome 	341150524
	<p>KLUDI MEDI CARE single lever basin mixer DN 15 clinic lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation rapid installation set fixed spout copper tubes 10 mm P-IX 9571/IIZ spout height lower edge 95 mm</p>	chrome 	341120524
	<p>KLUDI MEDI CARE single lever basin mixer DN 15 clinic lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation rapid installation set swivelling spout copper tubes 10 mm P-IX 9572/IIZ spout height lower edge 95 mm</p>	chrome 	341130524








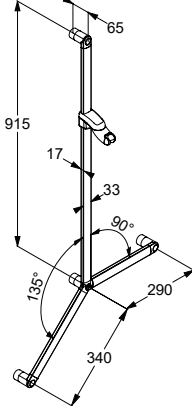


KLUDI MEDI CARE

product	product description	surface	art. no.
	<p>KLUDI MEDI CARE single lever basin mixer DN 15 care lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation rapid installation set fixed spout copper tubes 10 mm P-IX 9571/IIZ spout height lower edge 95 mm</p>	chrome 	341120534
	<p>KLUDI MEDI CARE single lever basin mixer DN 15 care lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation rapid installation set swivelling spout copper tubes 10 mm P-IX 9572/IIZ spout height lower edge 95 mm</p>	chrome 	341130534
	<p>KLUDI MEDI CARE wall mounted single lever mixer DN 15 clinic lever wall fastening flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling or lockable spout s-connections projection 180 mm PA-IX 9573/IZ</p>	chrome 	349220524
	<p>KLUDI MEDI CARE wall mounted single lever mixer DN 15 clinic lever wall fastening flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling or lockable spout projection 245 mm s-connections PA-IX 9573/IZ</p>	chrome 	349200524
	<p>KLUDI MEDI CARE wall mounted single lever mixer DN 15 clinic lever wall fastening flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling or lockable spout projection 245 mm lockable S-connections PA-IX 9574/IZ</p>	chrome 	349210524







KLUDI MEDI CARE

product	product description	surface	art. no.	
	 <p>KLUDI STANDARD CARE wall fitting DN 15 wall fastening flow rate 8 l/min at 3 bar casted spout care-aerator M 24 x 1 s-connections PA-IX 8668/IZ handle 08 = handle Terralux metal</p>	chrome	320040508	
Wanne		 <p>KLUDI MEDI CARE thermostatic hospital mixer DN 15 wall fastening flow rate 8 l/min at 3 bar care-aerator M 24 x 1 temperature control handle hot water safety device 40 °C clinic lever shut-off valve dirt catcher sieves lockable S-connections PA-IX 9022/IZ</p>	chrome	350850564
Dusche		 <p>KLUDI MEDI CARE thermostatic shower mixer DN 15 wall fastening temperature control handle with hot water safety device 38° C Suitable for thermal disinfection unlocking via Allen key by the lockable button ceramic shut-off valve 180° shower outlet G 1/2 protected against back flow flow class B dirt catcher sieves lockable S-connections P-IX 8049/IB</p>	chrome	353300538
	 <p>KLUDI SIRENA CARE barrier free shower bar L = 900 mm integrated grab handles length of handle: 90° = 250 mm, 135° = 300 mm, left and right suitable 50 mm projection fastening set with special dowels continuously adjustable slider adjustable by pulling-down the shower hose vertically and horizontally adjustable adjustable shower holder with KLUDI SUPARAFLEX SILVER-hose G 1/2 x G 1/2 x 1600 mm anti twist with conical nuts</p>	chrome	6150205-00	





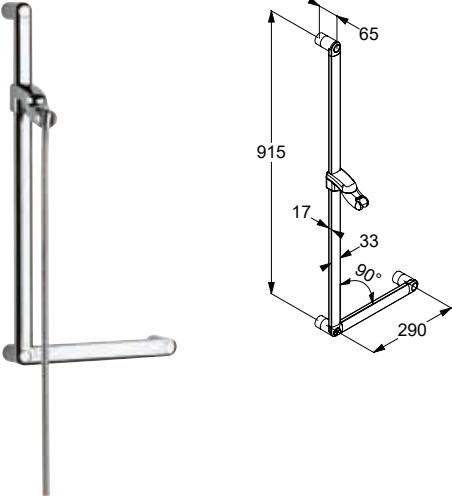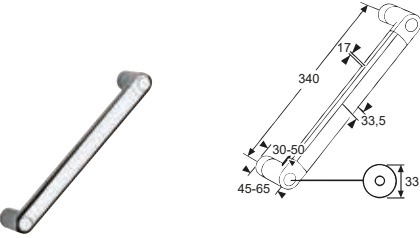


KLUDI MEDI CARE

product	product description	surface	art. no.
	<p>KLUDI SIRENA CARE barrier free shower bar L = 900 mm integrated grab handles (length of handle 250 mm und 90° angle), left and right suitable 50 mm projection fastening set with special dowels continuously adjustable slider adjustable by pulling-down the shower hose vertically and horizontally adjustable adjustable shower holder with KLUDI SUPARAFLEX SILVER-hose G 1/2 x G 1/2 x 1600 mm anti twist with conical nuts</p>	chrome	6150305-00
	<p>KLUDI SIRENA CARE barrier free bathtub holder length of handle 300 mm 50 mm projection fastening set with special dowels</p>	chrome	6150605-00
<p>Accessories</p> 	<p>KLUDI place-saving bottle trap with wall flange (escutcheon) Ø 65 mm with bent outlet Ø 32 mm according to DIN EN 274 G 1 1/4 x 32 mm</p> 	chrome	1025505-00








SPARE PARTS AND ACCESSORIES

product	product description	surface	art. no.
Spare parts 	gasket kit kitchen mixers series KLUDI MIX / KLUDI OBJEKTA till 12/2002	neutral	7531200-00
	gasket kit kitchen mixers series KLUDI TRENDO STAR/KLUDI KLUDI OBJEKTA MIX NEW	neutral	7432900-00
	gasket kit kitchen mixers series KLUDI MIX from 01/2003	neutral	7683700-00
	gasket kit kitchen mixers series KLUDI KOMET / KLUDI TRENDO	neutral	7548400-00
	gasket kit kitchen mixers series KLUDI LOGO	neutral	7599700-00








SPARE PARTS AND ACCESSORIES

product	product description	surface	art. no.
	gasket kit kitchen mixers series KLUDI MX	neutral	7812200-00
	Classical lift-cone headpart G 3/8 with handle Terralux plastic marking: blue according to DIN EN 200	chrome	110010515
	Classical lift-cone headpart G 3/8 with handle Terralux plastic marking: red according to DIN EN 200	chrome	110020515
	Classical lift-cone headpart G 1/2 with handle Terralux plastic marking: blue/red according to DIN EN 200	chrome	111030515
	Classical lift-cone headpart G 1/2 with handle Terralux metal marking: blue according to DIN EN 200	chrome	110030508









SPARE PARTS AND ACCESSORIES

product	product description	surface	art. no.
	Classical lift-cone headpart G 1/2 with handle Terralux metal marking: red according to DIN EN 200	chrome	110040508
	Classical lift-cone headpart G 1/2 according to DIN EN 200	neutral	7521800-00
	ceramic headpart G 1/2 with ceramic discs 90° right-locking according to DIN EN 200	neutral	7505400-00
	ceramic headpart G 1/2 with ceramic discs 90° left-locking according to DIN EN 200	neutral	7505500-00
	ceramic-headpart G 1/2 x 180°	neutral	7502500-00













SPARE PARTS AND ACCESSORIES

product	product description	surface	art. no.
	Classical lift-cone headpart G 1/2 for concealed valves DN 15 according to DIN EN 200	neutral	7557000-00
	Classical lift-cone headpart G 3/4 for concealed valves DN 20 according to DIN EN 200	neutral	7557100-00
	head part G 3/8 according to DIN EN 200	neutral	7552600-00
 	cartridge 46 mm with ceramic discs for compression- and depressurized fittings according to DIN EN 817	neutral	7520100-00
 	cartridge 46 mm ECO with ceramic discs with pre-adjustable hot water limitation flow rate and hot-water notch for compression fittings according to DIN EN 817	neutral	7640000-00













SPARE PARTS AND ACCESSORIES

product	product description	surface	art. no.
	 <p>cartridge 41 mm with ceramic discs for compression fittings according to DIN EN 817</p>	neutral	7685600-00
	 <p>cartridge 41 mm with ceramic discs for low pressure mixer according to DIN EN 817</p>	neutral	7412900-00
	 <p>cartridge 41 mm for clinic fittings with ceramic discs according to DIN EN 817</p>	neutral	7459800-00
	 <p>cartridge 35 mm with ceramic discs for compression fittings according to DIN EN 817</p>	neutral	7560500-00
	 <p>control unit K 35 mm with ceramic discs for low pressure mixer according to DIN EN 817</p>	neutral	7480500-00













SPARE PARTS AND ACCESSORIES

product	product description	surface	art. no.
	 <p>cartridge 36 mm with ceramic discs for compression fittings according to DIN EN 817</p>	neutral	7560700-00
	 <p>control unit K 36 mm with ceramic discs for low pressure mixer according to DIN EN 817</p>	neutral	7581000-00
	 <p>cartridge 25 mm with ceramic discs for compression fittings according to DIN EN 817</p>	neutral	7486800-00
	 <p>KLUDI E-GO cartridge 40 mm for compression fittings</p>	neutral	7475000-00
	 <p>cartridge for single lever mixer KLUDI MEDI CARE with coupling</p>	neutral	7436600-00



SPARE PARTS AND ACCESSORIES

product	product description	surface	art. no.
 	KLUDI O-CEAN joystick ceramic cartridge with ceramic discs according to DIN EN 817	neutral	7494700-00
 	cartridge 28 mm with ceramic discs according to DIN EN 817	neutral	7661900-00
 	temperature control unit for wall mounted thermostat 35200, 35205, 35260, 35400, 35401, 57420, according to DIN EN 1111	neutral	7672900-00
 	temperature control unit for concealed thermostatic mixer (spare part for 7587000-00) 35156, 35158, KLUDI FLEXX.BOXX 88066, according to DIN EN 1111	neutral	7480900-00
 	temperature control unit Thermostar S 25 according to DIN EN 1111	neutral	7639000-00



SPARE PARTS AND ACCESSORIES

product	product description	surface	art. no.
 	temperature control unit for concealed thermostat G 3/4 according to DIN EN 1111	neutral	7492700-00
 	temperature control unit for Klinik thermostatic mixer 35085	neutral	7526300-00
 	temperature control unit for wall mounted thermostat 35100, 35101 according to DIN EN 1111	neutral	7447000-00
	kitchen showers automatic diverter: shower/spray cascade aerator M 24 x 1 flow class A 33901, 33955, 31834, 31738 for compression fittings	chrome	7506805-00
Accessories 	s-pointer aerator male thread M 24 x 1A swivelling spray insert flow 13 l/min at 3 bar	chrome	7437005-00








SPARE PARTS AND ACCESSORIES

product	product description	surface	art. no.
	s-pointer eco-aerator male thread M 24 x 1Z swivelling spray insert flow rate 7,5 - 9,0 l/min at 3 bar	chrome	7483905-00
	flow regulator male thread M 24 x 1 ND for low pressure mixer	chrome	7520505-00
	cascade aerator male thread M 24 x 1A flow 13 l/min at 3 bar	chrome	7641605-00
	PCA s-pointer aerator M 24 x 1 male thread M 24 x 1A flow rate 6 l/min	chrome	7339005-00
	ball joint for bidet mixer without aerator M 24 x 1A outside screw thread	chrome	7537505-00








SPARE PARTS AND ACCESSORIES

product	product description	surface	art. no.
	pop-up waste G 1 1/4 for basin-/bidet mixers complete chrome plated	chrome	7526005-00
	s-connection G 1/2 x G 3/4 with shut-off and push-on rosette	chrome	7589505-00
	s-connections G 1/2 x G 3/4		7655204-00
	installation wrench for cartridge 7520100-00 from 09/2005	neutral	92907300-00
	clamping screw wrench for cartridge 7560500-00	neutral	92907700-00



SPARE PARTS AND ACCESSORIES

product	product description	surface	art. no.
	clamping screw wrench for cartridge 7685600-00	neutral	92912800-00
	KLUDI WAGA / KLUDI ROTEXA installation wrench pop-up wastes for pre-installation for 2104000-00	neutral	83027400-00
	KLUDI TASSO 90 (21095), KLUDI TASSO 50, KLUDI TASSO PLUS installation wrench for pre-installation	neutral	83028800-00
	KLUDI Universal fitting wrench for aerator M 18 x 1, M 22 x 1, M 24 x 1, M 28 x 1, M 16,5 x 1 Caché® TT, Caché® TJ, Caché® TF, Caché® JR, Caché® STD	neutral	7488300-00
	KLUDI caché-aerator male thread M 16,5 x 1Z flow rate 8,4 l/min at 3 bar	neutral	7426600-00



General Terms and Conditions of Sale of Kludi GmbH & Co. KG

Article 1 General – Scope

(1) These General Terms and Conditions of Sale shall apply to all deliveries and services of Kludi GmbH & Co. KG (referred to in the following as: Kludi); conditions of the ordering party that contradict or deviate from these General Terms and Conditions of Sale (and/or supplementary conditions) shall not apply, except where Kludi has explicitly approved their application.

These General Terms and Conditions of Sale shall also apply where Kludi is aware of conditions of the ordering party that contradict or deviate from these General Terms and Conditions of Sale, and performs the delivery to the ordering party without reservation.

If the ordering party accepts services/deliveries from Kludi without reservation, this shall also constitute acceptance of these General Terms and Conditions of Sale.

(2) All agreements that are made between Kludi and the ordering party regarding the performance of a contract shall be recorded in writing in the respective contract. The respective contract document shall be presumed to be complete and accurate.

Where there exist between Kludi and the ordering party other unilateral or multilateral contractual agreements, and where individual clauses of those contracts conflict with clauses of these General Terms and Conditions of Sale, the clauses of those other agreements shall only replace the corresponding clauses of these General Terms and Conditions of Sale where this has been explicitly agreed.

(3) These General Terms and Conditions of Sale shall only apply vis-à-vis companies in the meaning of Article 310 of the German Civil Code (BGB).

(4) These General Terms and Conditions of Sale shall also apply to all future transactions with the ordering party, without Kludi being obliged to make specific reference to them in individual cases.

Article 2 Information, advisory services

Information and advisory services regarding the products of Kludi shall be provided on the basis of the prior experience of Kludi. The values specified in that connection shall be calculated average values. Information and advisory services shall not render unnecessary suitability testing of the goods supplied and compliance with processing instructions, in particular by the ordering party.

Verbal information shall not be binding, unless an explicit agreement has been made to the contrary.

Article 3 Quotation, quotation documents

(1) If an order is subject to qualification as a quotation under Article 145 of the German Civil Code (BGB), Kludi shall be entitled to accept it within 3 weeks. A supply contract or other contract shall only then be considered to exist when Kludi has explicitly confirmed the order or other assignment, or when the goods have been delivered.

(2) Samples and specimens shall be considered non-binding samples for inspection purposes. In the case of purchases based on samples and/or specimens, deviations are reserved where these are customary for the industry or lie within the scope of normal manufacturing and technical improvement. The delivery of samples or specimens shall not constitute a guarantee of quality or shelf life, or a quality agreement, and it shall not be associated with the definition of a standard quality, unless this is explicitly indicated in the order confirmation.

(3) Samples and specimens shall be returned to Kludi in faultless condition and at the expense of the ordering party within 4 weeks. If they are not returned within this period, Kludi shall be entitled to charge the purchase price in accordance with the price list. Price lists can be requested from Kludi at any time.

(4) Where not explicitly otherwise agreed, the specifications published by Kludi in catalogues, brochures and other publications in text or image format (e.g. descriptions, photographs or drawings) shall constitute approximate specifications, and shall not constitute quality specifications or possible uses of the goods supplied by Kludi. Specifications from Kludi shall not constitute guarantees of shelf life or quality, or quality specifications, and shall correspond to the current state of knowledge at Kludi. Kludi shall not be liable for the success of the intended use.

(5) Kludi retains all property rights and copyrights, and rights of reproduction, to images, drawings, calculations, cost estimates, and other documents; it shall not be permissible for images, drawings, calculations, cost estimates and other documents to be disclosed to third parties. These documents shall be returned to Kludi if the order is not placed. The aforementioned provisions of this Para. 5 shall in particular apply to written documents marked „confidential“; the ordering party shall require the explicit approval of Kludi before the disclosure of these to third parties.

Article 4 Prices, payment conditions

(1) Unless otherwise agreed in the order confirmation, the prices of Kludi on the date of delivery apply „ex works“ and exclusive of packaging and transportation; the latter will be invoiced separately.

(2) The statutory value-added tax is not included in the prices; it will be separately stated in the invoice at the statutory rate on the date of invoicing.

(3) Deliveries to destinations in EU countries and in states party to the

Agreement on the European Economic Area shall be subject to an agreed carriage-paid limit of Euro 750.00 per individual order, and a small-quantity surcharge of Euro 6.00 for individual orders with a value under Euro 50.00. Where upon request of the ordering party deliveries are to be made to secondary or tertiary addresses, a surcharge of 10% of the invoice value for the order shall be charged on these delivery routes, in addition to the agreed price.

For deliveries to destinations on the continents of Asia (in particular China and Russia), Australia (including New Zealand), Africa, Antarctica, South America and North America, a carriage-paid limit of EURO 500,00 shall apply per individual order, and a small-quantity surcharge of EURO 500,00 for individual orders with a value under EURO 500,00. Where upon request of the ordering party deliveries are to be made to secondary or tertiary addresses, a surcharge of 10% of the invoice value for the order shall be charged on these delivery routes, in addition to the agreed price.

(4) Where not otherwise specified in the order confirmation, the purchase price shall be due for payment net (without deduction) within 30 days after the invoice date. The statutory provisions regarding the consequences of default in payment shall apply. If the ordering party pays the purchase price within 10 days after the invoice date, an early payment discount of 3% of the invoice total shall apply, provided that all older purchase price debts have been paid in full. Any further early payment discount shall be subject to special explicit agreement. Payments shall be made in euros, and shall be payable free of postage and charges to paying agents specified by Kludi. Bills of exchange and cheques shall only constitute payment when they have been redeemed, and shall be accepted without obligation for timely presentation and protesting.

(5) In the event of default, Kludi shall be entitled to claim default interest at the statutory rate (Article 288 Para. 1, Para. 2 of the German Civil Code (BGB)). If Kludi demonstrates that the default in payment has incurred higher loss of interest, this can be claimed. The right to assert further claims is explicitly reserved.

In the case of bilateral commercial transactions, Kludi shall be entitled to charge maturity interest at a rate of 4%, starting from the date of the payment claim.

(6) In the event of justified doubt in the solvency of the ordering party, in particular in the event of payment arrears, Kludi shall be entitled to demand advance payments or collateral from the ordering party for further deliveries, without prejudice to any further claims, and shall be entitled to revoke individually agreed payment periods.

(7) The ordering party shall only be entitled to rights of offsetting and retention where the counterclaims have the force of law and are recognised by Kludi. Furthermore, the ordering party shall only be entitled to a right of retention where the counterclaim derives from the same contractual relationship.

Kludi shall be entitled, despite any provisions of the ordering party to the contrary, to first offset payments against any older liabilities of the ordering party. If costs and interests have already been incurred, Kludi shall be entitled first to offset the payment against the cost, then against the interest, and finally against the principal demand.

(8) All customs duties, taxes, levies etc. incurred outside the Federal Republic of Germany shall be paid by the ordering party.

Article 5 Delivery time

(1) Delivery schedules shall only be binding where this has been explicitly agreed. The delivery time specified by Kludi shall only begin after all technical questions have been clarified and Kludi has given an additional explicit delivery time confirmation. Delivery schedules shall be considered to have been complied with where the delivered product has left the facility of Kludi, or notification of dispatch readiness has been sent.

(2) Compliance with delivery obligations on the part of Kludi shall furthermore be dependent on the timely and proper fulfilment of the obligations of the ordering party; this shall in particular relate to the timely receipt of all documents to be supplied by the ordering party, and required permits and approvals, in particular for plans, and compliance with the agreed payment conditions (e.g. advance payments). The right of objection on grounds of non-fulfilment of contract shall be reserved.

(3) Where non-compliance with the agreed schedules is attributable to force majeure, e.g. mobilisation, war, rioting or similar events, e.g. strike, lockout etc., the agreed schedules shall be extended appropriately. The same shall apply in the event that Kludi itself has not received deliveries in a timely or proper manner (the agreed delivery schedules shall correspondingly be subject to proper and timely deliveries by suppliers).

(4) Kludi shall be entitled to make partial deliveries, where these are reasonable for the ordering party. It shall be permitted for partial deliveries to be invoiced separately.

(5) If the ordering party defaults on acceptance or culpably violates other duties of cooperation, Kludi shall be entitled to request compensation of any losses incurred by Kludi as a result, including remuneration of any excess expenditure. Further claims shall be reserved.

(6) Where the requirements of Para. (5) apply, the risk of accidental loss or accidental deterioration of the purchased product shall be transferred to the ordering party from the date at which the latter defaults on acceptance or payment.

(7) Kludi shall be liable in accordance with the statutory provisions where the underlying purchase contract constitutes a fixed date transaction in the



meaning of Article 286 Para. 2 of the German Civil Code (BGB) or Article 376 of the German Commercial Code (HGB). Kludi shall also be liable in accordance with the statutory provisions where a delay in delivery for which Kludi is responsible entitles the ordering party to assert that he has no further interest in the continued performance of the contract. Subject to proper and timely deliveries by subsuppliers.

- (8) Kludi shall furthermore be liable in accordance with the statutory provisions where the delay in delivery arises from intentional or grossly negligent violation of contract for which Kludi is responsible; Kludi shall be liable for violations committed by representatives or vicarious agents of Kludi. Where the delay in delivery does not arise from an intentional violation of contract for which Kludi is responsible, the liability for compensation of damages by Kludi shall be limited to the foreseeable, typical damage.
- (9) Kludi shall also be liable in accordance with the statutory provisions where the delay in delivery for which Kludi is responsible arises from a culpable violation of a major contractual obligation; in this case, the liability for compensation of damages by Kludi shall be limited to the foreseeable, typical damage.
- (10) Kludi shall otherwise be liable in the event of delay in delivery to pay lump-sum default compensation in the sum of 3% of the value of the delivery for each full week of delay, limited, however, to a maximum of 9% of the value of the delivery.
- (11) The limitations/exclusions of liability described in Para. 7-10 of this Article shall not apply in the event of death, injury or damage to health.

Article 6 Transfer of risk

- (1) Unless otherwise provided for in the order confirmation, the delivery shall be agreed as „ex works“. The risk shall correspondingly be transferred to the ordering party at the latest when the delivered products are dispatched, even where partial deliveries are made, or where Kludi still has to perform other services, e.g. where Kludi has accepted the dispatch costs or the transport and/or installation costs. The provisions of Article 5 Para. 6 shall also apply.
- (2) The return of transport packaging and all other packaging shall not be accepted; this applies with the exception of pallets. The ordering party shall be obliged to dispose of the packaging at its own expense.
- (3) Where the ordering party wishes, Kludi shall arrange for the delivery to be covered by a separate transport insurance policy; the costs incurred shall be paid by the ordering party.
- (4) The statutory obligations regarding inspection and notification of defects (Article 377 of the German Commercial Code (HGB)) shall continue to apply without restriction. If the ordering party fails to perform the immediate inspection of the goods required by Article 377 of the German Commercial Code (HGB), or fails immediately to give notification of defects, the goods shall be considered approved, and the ordering party shall no longer be entitled to assert claims relating to defects or incomplete delivery. Where Kludi negotiates with the ordering party regarding a complaint raised by the latter, this shall not constitute a tacit waiver of the objection of late inspection of the goods or notification of defects without explicit notice thereof. The same shall apply to any statement from Kludi that it may be prepared to remedy the defect (or where such remediation actually takes place). Notification of defects shall require the written form.

Article 7 Liability for defects

Kludi shall be liable for any defects in delivery, excluding further claims, as follows:

- (1) Claims for defects shall not exist in cases of only minor deviation from the agreed quality or – in the absence of an agreement – from the customary quality, where the impairment of function is only insignificant, in cases of natural wear or damage that occurred after the transfer of risk as a result of incorrect or negligent treatment and handling (particularly by untrained personnel), improper or inappropriate use, excessive loading, inappropriate equipment, defective construction work, inappropriate building ground, incorrect installation, incorrect use, or which occur as a result of specific external factors that have not been taken into consideration by the contract, or in case of non-reproducible software errors. If the ordering party or third parties perform unprofessional modifications or maintenance work, claims for defects cannot be asserted for these or the resulting consequences. Incorrect use, in relation to which no claims for compensation of defects shall be possible, shall in particular include the installation of the object of purchase or parts thereof in other products, or the installation of third-party components into the object of purchase, or in the event of modification of the object of purchase by the ordering party, unless an alternative has explicitly been agreed.
- (2) All parts supplied that contain defects shall be either repaired or replaced free of charge at the discretion of Kludi, where and inasmuch as the cause was already present at the time of the transfer of risk (supplementary performance).
- (3) In the event of a justified notification of defects, the ordering party shall give Kludi the opportunity of supplementary performance within a reasonable period.
- (4) If the supplementary performance has failed or is unreasonable for the ordering party (Article 440 of the German Civil Code (BGB)), or is dispensable because
 - a) the supplementary performance is conclusively rejected by Kludi,

b) the supplementary performance has not been effected by a contractually determined deadline or within a specified period, and the ordering party has contractually bound the continuation of its interest in performance to the punctuality of the performance, or

- c) special circumstances exist that, under consideration of the interests of both parties, justify immediate withdrawal (Article 323 Para. 2 of the German Civil Code (BGB)), the ordering party shall immediately be entitled to reduce the purchase price or withdraw from the contract at its discretion, and (or also additionally) in accordance with Para. 10 in conjunction with Article 11 to demand compensation of damages in lieu of the performance, or reimbursement of frustrated expenditure.
- (5) The expenditures required for the purpose of supplementary performance, and in particular transportation, travel, personnel and material costs, shall be paid by Kludi. This shall not apply where the expenditures increase because the object of delivery has been removed to another location than the place of fulfilment (Article 12 Para. 3) of the delivery, except where this corresponds to the intended use of the object of delivery.
- (6) If the ordering party accepts a defective delivery despite being aware of the defect, he shall only be entitled to the claims and rights arising from the defect if he reserves these within the framework of the acceptance process.
- (7) The statements made in brochures, advertising materials, descriptions etc. regarding dimensions, weights, performance capabilities etc. shall constitute approximate statements, and not quality specifications. They shall not constitute a guarantee of quality or shelf life. Kludi reserves the right to deviations. This shall also apply to design changes.
- (8) Claims for supplementary performance shall be subject to statutory limitation in one year after the beginning of the statutory limitation period; the same shall apply for withdrawal and reduction. This period shall not apply where the law under Article 438 Para. 1 No. 2 (buildings and products for buildings), Article 479 Para. 1 (right of recourse) and Article 634a Para. 1 No. 2 (construction defects) of the German Civil Code (BGB) prescribes mandatory longer periods, and shall also not apply in cases of intent, malicious non-disclosure of the defect, or non-compliance with a quality guarantee, or violation of major contractual obligations (cardinal obligations). In such cases the statutory limitation periods shall apply. The statutory regulations regarding suspension of expiry, suspension, and commencement of the limitation period, shall remain unaffected; in the event of supplementary performance by means of delivery of a defect-free product, the warranty period shall however end at the time when it would have ended for the defective product.
- (9) Any rights of recourse of the ordering party against Kludi under Article 478 of the German Civil Code (BGB) (recourse of the principal) shall only apply where the ordering party has made no agreement with his customer that exceed the statutory claims for defect. The scope of the right of recourse against Kludi shall be governed by Article 478 Para. 2 of the German Civil Code (BGB), and Article 7 Para. 1-7, 10 and Article 11 shall apply correspondingly.
- (10) Any claims by the ordering party for compensation of damages in relation to a material defect shall be determined on the basis of Article 11.

Article 8 Returns

- (1) Returns of the purchased product shall be excluded, except in cases under Article 7.
- (2) Purchased products returned without the approval of Kludi shall be rejected by Kludi, or sent back to the ordering party freight forward.
- (3) If in individual cases and after prior explicit agreement Kludi exceptionally agrees to the return delivery, Kludi shall be entitled to invoice processing costs in the sum of at least 30% of the net value of the goods, depending on the usability of the goods.
- (4) The ordering party shall bear the transportation risk and transport costs.

Article 9 Retention of title

- (1) Kludi shall retain the title to all delivered products (referred to in the following as: ROT goods) until the payment of all receivables, for whatever legal reason, including receivables arising in future conditional receivables from concurrent or subsequently concluded contracts. This shall also apply where payments are made on specifically designated receivables. If there are indicators justifying the assumption of insolvency on the part of the ordering party, or the threat of such, Kludi shall be entitled to withdraw from the contract without notice, and to demand the surrender of the ROT goods.
- (2) Processing of the ROT goods shall take place on behalf of Kludi as the manufacturer in the meaning of Article 950 of the German Civil Code (BGB), without obligation for Kludi. The processed goods shall constitute ROT goods in the meaning of Para. 1. Where the ROT goods are processed, aggregated or mixed with other goods by the ordering party, Kludi shall have joint title to the new product in the ratio of the invoice value of the ROT goods to the invoice value of the other goods used. If the title of Kludi lapses upon aggregation or mixing, the ordering party hereby already transfers his ownership rights to the new stock or product in the scope of the invoice value of the ROT goods, and holds it in safekeeping for Kludi free of charge. The joint ownership rights thus arising shall constitute ROT goods in the meaning of Para. 1.
- (3) If the ROT goods are aggregated with real property by the ordering party as an entrepreneur in the meaning of Article 946 of the German Civil Code



(BGB), the ordering party shall also assign to Kludi at the time of aggregation the receivables to which he is entitled as remuneration for this aggregation, together with all auxiliary rights, and without the need for any further separate statement, as security in the sum of the ratio of the ROT goods aggregated to the other goods aggregated, or to the value of his total performance.

- (4) The ordering party shall be entitled to resell, process, aggregate with other goods, or otherwise install the ROT goods only within the framework of ordinary business operations, and provided that he is not in default of payment of the purchase price. Any other utilisation of the ROT goods shall not be permitted. Distraint or other seizure of the ROT goods by third parties shall be reported to Kludi immediately. All intervention costs shall be paid by the ordering party, where they cannot be collected by the third party, and where the third-party action against execution has legitimately been taken. If the ordering party defers payment of the purchase price for his customer, he shall be obliged to retain the title to the ROT goods under the same conditions as Kludi has retained the title to the delivery of the ROT goods. The ordering party shall however not be obliged to also retain the title in relation to the receivables to which he will be entitled from his customer in future. Resale by the ordering party shall otherwise not be authorised.
- (5) The receivables of the ordering party from the resale of the ROT goods are hereby already assigned to Kludi. These shall serve as security in the same manner as the ROT goods. Resale by the ordering party shall only be entitled and authorised where it is ensured that the receivables to which he is entitled as a result are transferred to Kludi.
- (6) If the ROT goods are sold by the ordering party at an overall price together with other goods not supplied by Kludi, the receivables from the sale shall be assigned in the value of the invoice value of the respective ROT goods sold.
- (7) If the receivables are recorded in an ongoing account, the ordering party hereby already assigns to Kludi a proportion of the balance, including the closing balance of the current account, corresponding to these receivables.
- (8) The ordering party shall be authorised to collect the assigned receivables until such authorisation is revoked by Kludi. Kludi shall be entitled to revoke this authorisation if the ordering party fails to fulfil his payment obligations arising from the business relationship in a proper manner, or if circumstances become known that have the potential to significantly reduce the credit rating of the ordering party. Where the conditions are fulfilled for this right of revocation to be exercised, upon request from Kludi the ordering party shall immediately disclose the assigned receivables and the respective debtors, provide all information required for the collection of the receivables, provide Kludi with the associated documents, and notify the debtor of the assignment. Kludi themselves shall also be entitled to notify the debtor of the assignment. The ordering party shall not otherwise be entitled to assign the receivables, and in particular not as a result of the authorisation to collect thus granted.
- (9) If the nominal value (invoice total of the goods or nominal total of the receivables entitlement) exceeds the securities held by Kludi for the secured receivables by a total of more than 10%, upon request from the ordering party Kludi shall be entitled to release securities of its choice.
- (10) If Kludi asserts a retention of title, this shall only constitute withdrawal from the contract where this is explicitly stated by Kludi. The right of the ordering party to own the ROT goods shall lapse if he fails to fulfil his obligations arising from this or another contract.

Article 10 Use of image data, text, videos, and/or other print and digital media

- (1) The use of images, image data, text, videos, and/or other media for which Kludi is entitled to industrial property rights, and in particular copyrights, exploitation rights, and rights of use, shall require the explicit prior approval of Kludi.
- (2) In the event that explicit approval is granted under Para. 1, the following points shall be binding for any use of the images, image data, text, videos, and/or other media for which Kludi is entitled to industrial property rights, and in particular copyrights, exploitation rights, and rights of use, and also during the presentation of products from Kludi on internet pages of the user:
 - a) The brand name „Kludi“ must not be used in the domain name (URL) of the user. The same shall apply correspondingly to other brands in the Kludi Group, and variations thereon.
 - b) In internet presentations and other media, only such photographs of Kludi products shall be used as are typical for the brand. Photos and silhouettes of the products used in internet presentations or other media shall be of at least the same standard as the official Kludi homepage or the print media used by Kludi. In this respect, Kludi reserves the right to make further specifications.

c) The Kludi image brand / logo shall only be used in internet presentations and other media with the explicit approval of Kludi. Articles 23 and 24 of the German Trade Marks Act (MarkenG) remain unaffected.

- d) In the event of such approval being granted and the Kludi image brand / logo being used in internet presentations, it shall be linked to the website www.kludi.com.
 - e) In the event of such approval being granted and the Kludi image brand / logo being used, only the original logo shall be used. It shall not be permitted for the user to modify the Kludi image brand / logo. The typefaces used on the Kludi homepage or in the print media used by Kludi shall also be used in the internet presentations of the user or in other media of the user, unless Kludi has explicitly approved another design.
 - f) The user must be clearly identifiable as the copyright holder of his internet presentation or other media. It must be beyond doubt that the internet presentation or other media is the responsibility of the user and not of Kludi. The Kludi image brand / logo shall therefore be a maximum of 50% of the height of the logo of the user.
 - g) Any further private or commercial use, or distribution of image data/files to third parties, shall only be permitted with the explicit prior approval of Kludi.
- (3) The use of the data provided by Kludi shall exclusively be permitted with reference to Kludi using the following format:
© KLUDI GmbH & Co. KG, Menden, Germany
 - (4) Any editing, modification, manipulation or distortion of the images and texts provided, e.g. rephotographing, graphic falsification, photocomposing, or alteration using electronic means, that exceed the scope of true-to-scale enlargement or reduction shall exclusively be permitted with the explicit approval of Kludi.
 - (5) In the event of a violation of the conditions of use described in this Article 10, Kludi retains the right to exclude the user from further use of the image data, and to revoke any approval already granted. All further statutory rights shall be retained.

Article 11 Compensation of damages / exclusion of liability

- (1) Any claims by the ordering party for compensation of damage – for whatever legal reason – shall be excluded, subject to alternative provisions of these General Terms and Conditions of Supply. This shall not apply in the event of malicious non-disclosure of defects, in the event of non-compliance with a quality guarantee, in the event of death, injury or damage to health, and/or in the event of intentional or grossly negligent violation of obligations by Kludi, or in the event of a violation of obligations whose fulfilment is essential for the proper performance of the contract, and with which the ordering party is entitled to expect compliance (major contractual obligations / cardinal obligations). Claims under the German Product Liability Act shall also be unaffected by this limitation of liability. This limitation of liability shall apply equally to violations of obligations by the bodies and vicarious agents of Kludi.
- (2) Vis-à-vis entrepreneurs, the claim for compensation of damages arising from violation of major contractual obligations shall, however, be limited to the foreseeable damage typical for the type of contract, in the absence of either intent or gross negligence, and in the absence of liability for death, injury or damage to health.
- (3) The aforementioned limitation of liability shall apply equally to claims for the reimbursement of frustrated expenditure (Article 284 of the German Civil Code (BGB)). The above provision shall not constitute a change of the burden of proof to the disadvantage of the ordering party.

Article 12 Applicable law, jurisdiction, place of fulfilment

- (1) Where the ordering party is a businessperson, the registered office of Kludi shall be the exclusive jurisdiction. Kludi shall however also be entitled to file claims against the ordering party at another statutory jurisdiction.
- (2) The law of the Federal Republic of Germany shall apply, excluding the UN Convention on Contracts for the International Sale of Goods and the standard rules for conflicts of international private law, and in particular the Rome I Regulation.
- (3) Where not otherwise agreed in the order confirmation, the place of fulfilment shall be the registered office of Kludi.
- (4) If individual clauses of these General Terms and Conditions of Sale are or become ineffective, wholly or in part, this shall not affect the effectiveness of the remaining clauses and the remaining parts of such clauses.

Kludi GmbH & Co. KG, As of: January 2015



Flow rate classes

Z ≤ 9,0 l/min

A ≤ 15,0 l/min

S ≤ 20,0 l/min

B ≤ 25,0 l/min

C ≤ 30,0 l/min

D ≤ 38,0 l/min

max. flow rate at flow pressure of 3 bar

Certifications



DIN EN ISO
9001: 2008



SVGW



DIN EN 274



WaterMark



DVGW



kiwa



SABS

Copyright 2023


Kludi GmbH & Co. KG, Menden (Germany)

All rights reserved. Reprinting, duplication and translation are permitted only with our express, written consent.

Kludi GmbH & Co. KG continuously endeavours to develop and improve all its products.

They are subject to technical modifications that may result at any time from changes and ongoing development. Consequently no legal claims can be made on the basis of the details, illustrations, descriptions and dimensions given in this catalogue.

No liability for misprints and errors. Printed in Germany.



99202242303/V0/01/23

Kludi GmbH & Co. KG
P.O. Box 25 60 · 58685 Menden
Am Vogelsang 31–33 · 58706 Menden
Germany

T +49 2373 904-0
E international-sales@kludi.com